
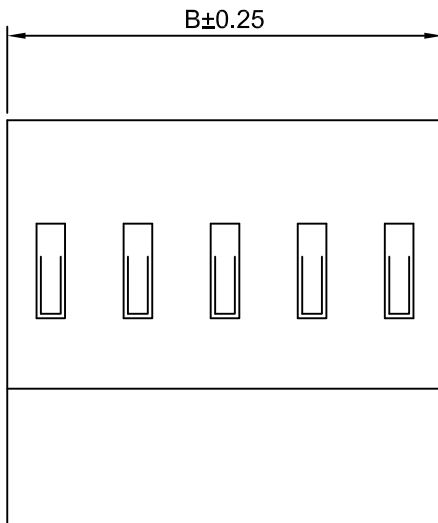


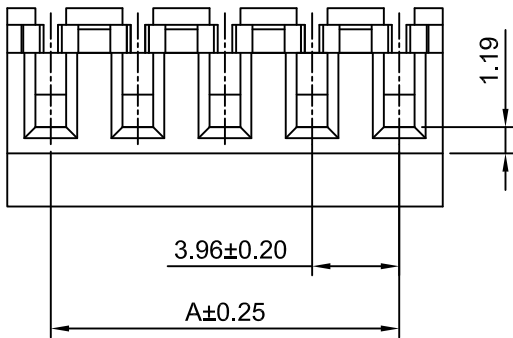

Ordering Information:

D3961HD-XP - ^{**}/₂ - ^{**}/₃

1:Part No.

2:Material:

OR-Orange=18 AWG(UL94V-2)

YL-Yellow=20 AWG(UL94V-2)

RD-Red=22AWG(UL94V-2)

WH-White=24 AWG (UL94V-2)

BL-Blue=26 AWG(UL94V-2)

BK-18-Black=18AWG(UL94V-0)

BK-20-Black=20AWG(UL94V-0)

BK-22-Black=22AWG(UL94V-0)

BK-24-Black=24AWG(UL94V-0)

BK-26-Black=26AWG(UL94V-0)

3:Plating Code:

(Blank)-Phosphor bronze/Tin over Nickel,Ni:30~50u"(0.76~1.27um)

GP-Phosphor bronze/Gold over Nickel,

Au:1u"(0.0254um) MIN,Ni:30~50u"(0.76~1.27um)

(Optional Gold plating available but MOQ requested)

G15-Phosphor bronze/Gold over Nickel,


Au:15u"(0.38um) MIN,Ni:30~50u"(0.76~1.27um)

(Optional Gold plating available but MOQ requested)

G30-Phosphor bronze/Gold over Nickel,

Au:30u"(0.76um) MIN,Ni:30~50u"(0.76~1.27um)

(Optional Gold plating available but MOQ requested)

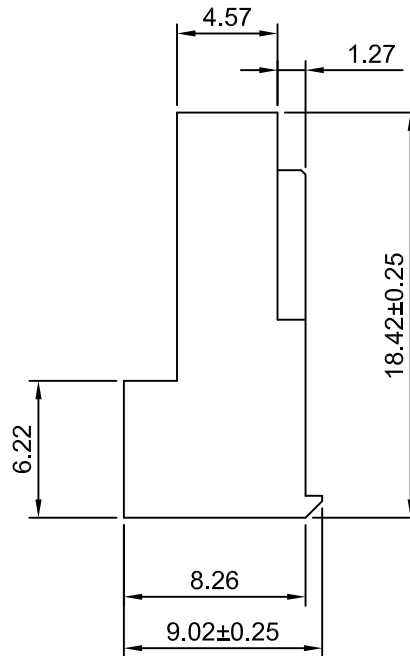

SPECIFICATIONS:

Current Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1500V AC/minute

Housing Material: Nylon66, UL 94V-2 or UL 94V-0

Terminal Material: Phosphor bronze/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	7.92	14P	51.48	55.44
3P	7.92	11.88	15P	55.44	59.40
4P	11.88	15.84	16P	59.40	63.36
5P	15.84	19.80	17P	63.36	67.32
6P	19.80	23.76	18P	67.32	71.28
7P	23.76	27.72	19P	71.28	75.24
8P	27.72	31.68	20P	75.24	79.20
9P	31.68	35.64	21P	79.20	83.16
10P	35.64	39.60	22P	83.16	87.12
11P	39.60	43.56	23P	87.12	91.08
12P	43.56	47.52	24P	91.08	95.04
13P	47.52	51.48			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Draw By:	Approved :
Dlankul Wan	Jack YIn

General Tolerance

A1	CHANGE THE INFORMATION	2019.01.14	x.xx±0.25	RPROJECT
A0	NEW RELEASE	2005.07.01	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

Title :

3.96mm IDC

Closed End Type

DRAW NO : D3961HD-XP

REV
A1