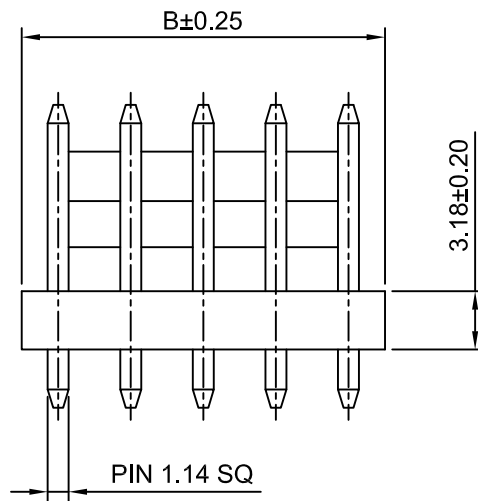
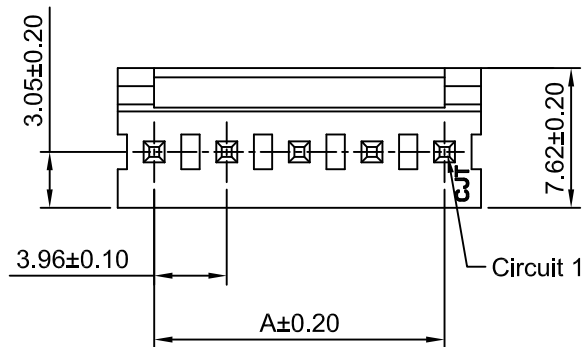


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

D3961WV-XP - *
1 2

1.Part NO.

2.Type:

(Blank): TYPE 1

L: TYPE 2

3.Finish:

(Blank): Tin over Nickel

G: Gold Flash (Au:1u")

G3: Gold Flash(Au:3u")

G15: Gold Flash(Au:15u")

G30: Gold Flash(Au:30u")

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.


Withstanding Voltage: 1500V AC/minute

Pin Material: Brass

Material: Nylon66 UL 94V-0 (White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
D3961WV-2P	3.96	7.92
D3961WV-3P	7.92	11.88
D3961WV-4P	11.88	15.84
D3961WV-5P	15.84	19.80
D3961WV-6P	19.80	23.76
D3961WV-7P	23.76	27.72
D3961WV-8P	27.72	31.68
D3961WV-9P	31.68	35.64
D3961WV-10P	35.64	39.60
D3961WV-11P	39.60	43.56
D3961WV-12P	43.56	47.52
D3961WV-13P	47.52	51.48
D3961WV-14P	51.48	55.44
D3961WV-15P	55.44	59.40
D3961WV-16P	59.40	63.36
D3961WV-17P	63.36	67.32
D3961WV-18P	67.32	71.28
D3961WV-19P	71.28	75.24
D3961WV-20P	75.24	79.20
D3961WV-21P	79.20	83.16
D3961WV-22P	83.16	87.12
D3961WV-23P	87.12	91.08
D3961WV-24P	91.08	95.04

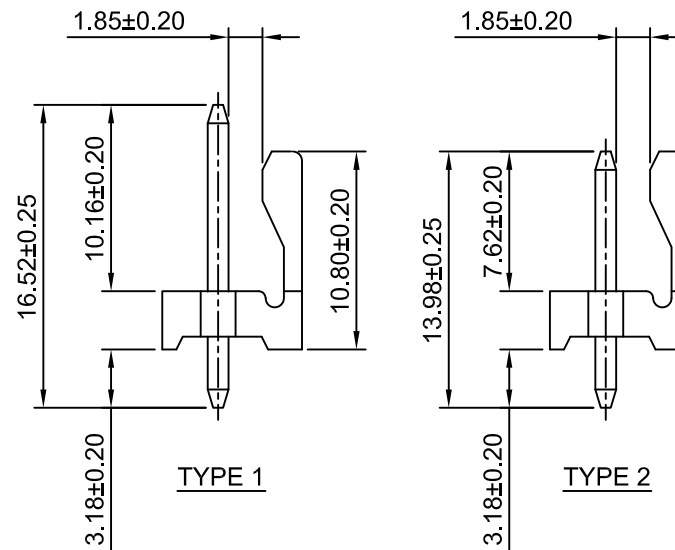

TYPE 1

TYPE 2

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1	3.96mm PITCH 180° WAFER	
DRWN	CHK'D	APPR		
Dengchun Yi	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION		
A1	CHANGE THE DRAWING	2020.05.13	DRAWING NO. D3961WV-XP	
A0	NEW RELEASE	2011.05.13		
REV	DESCRIPTION	DATE		
			REV A1	