


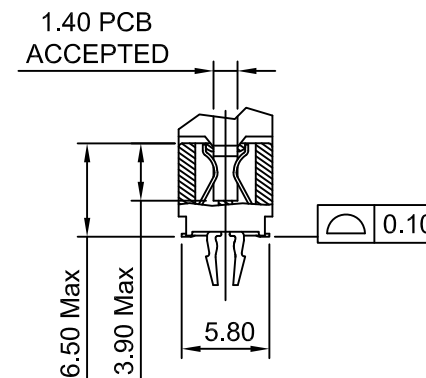
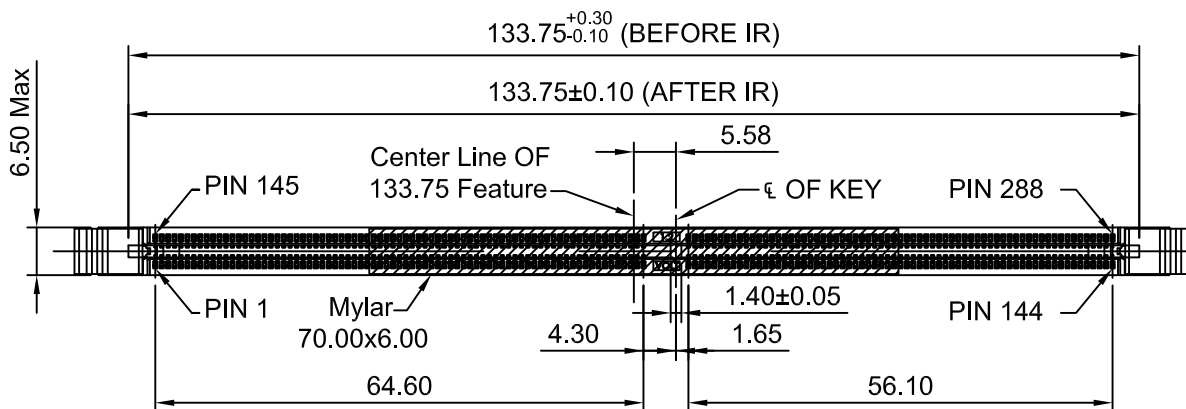




SEC: A-A
SCALE 2:1

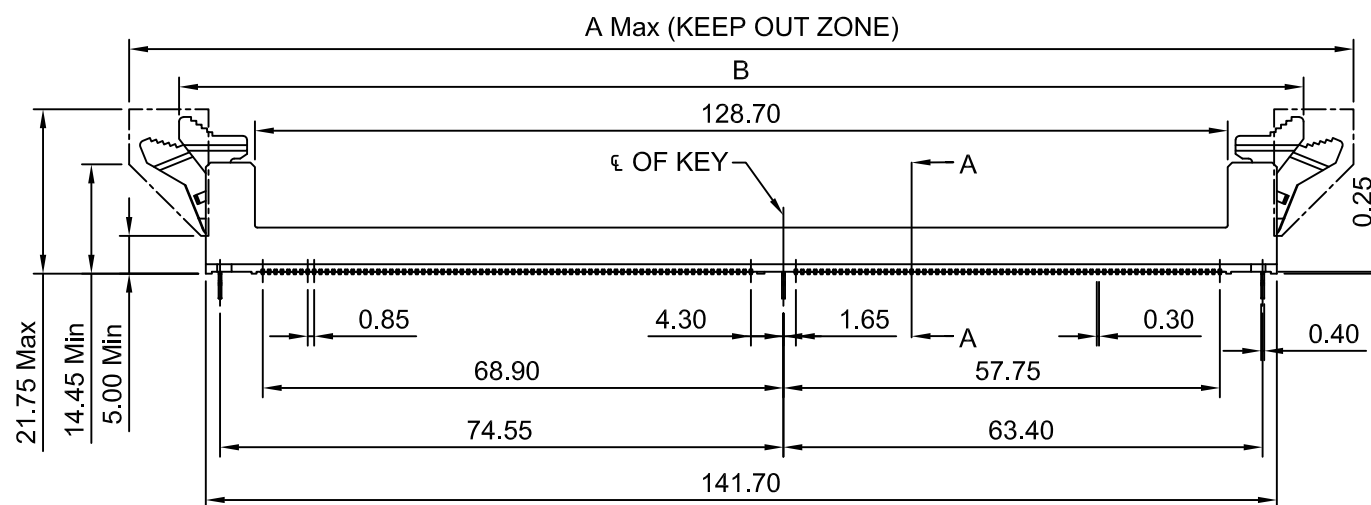

HARPOON FOOT




TAB TYPE


LATCH TYPE	DIM "A"	DIM "B"
SHORT	152.0	142.3
MIDDLE	156.0	144.2
LONG	162.0	148.8

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2024.05.08


CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE DDR 4, VERTICAL 288P MEMORY SOCKET SMT TYPE
mm	1:1	1 of 4	
DRAWN	CHK'D	APPR'D	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. DDR4-0851WVX-S-FX-288P
x,x±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			
			REV A0

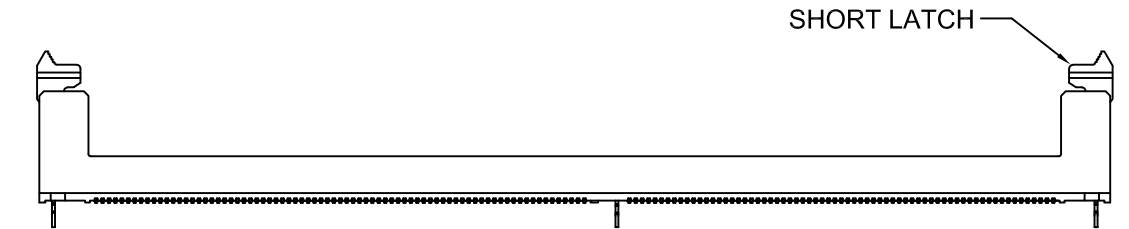

SHORT LATCH

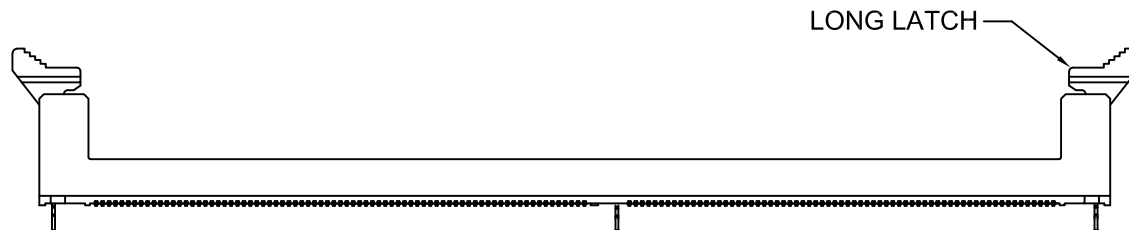

LONG LATCH
TYPE A

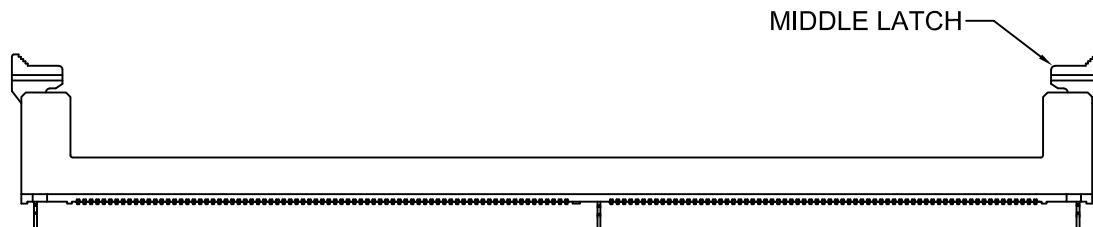

MIDDLE LATCH
TYPE B

Ordering Information:

DDR4 - 0851WVX -S- FX -288P- ** - ** - ** - **
1 2 3 4 5 6 7

1.Part NO.

2.Latch Type:

(Blank): Short Latch

A: Type A Long Latch

B: Type B Middle Latch

3. Locating Posts Style:

(Blank): Harpoon foot

1: TAB

4.Housing Color

(Blank): Black

HNA: Natural

HLB: Blue

HYL: Yellow

5.Latch Color

(Blank): Black

LNA: Natural

LBL: Blue

6.Finish:

(Blank): Select Gold:15µin[0.38µm]Min.

Select reflowed matte tin: 80µin[2.03µm] Min

Overall Nickel Underplate: 30µin[0.76µm] Min.

G: Select Gold:1uin[0.025um]Min.

Select reflowed matte tin: 80µin[2.03µm] Min

Overall Nickel Underplate: 30µin[0.76µm] Min.

G30: Select Gold:30µin[0.76µm]Min.

Select reflowed matte tin: 80µin[2.03µm] Min

Overall Nickel Underplate: 30µin[0.76µm] Min.

7.Packing:

(Blank): Hard Tray

SPECIFICATIONS:

Current Rating: 0.75A AC,DC

Voltage Rating: 25V AC,DC

Temperature Range: -40°C ~ +105°C

PIN Material: Copper Alloy(C7025)

Boardlocks And TAB: SUS 304


Latch Material: Nylon 9T,UL94V-0 Halogen Free

Housing Material: Nylon 9T,UL94V-0 Halogen Free


CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet	TITLE	
mm	1:1	2 of 4	DDR 4, VERTICAL 288P MEMORY SOCKET SMT TYPE	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			DDR4-0851WVX-S-FX-288P	A0
A0	NEW RELEASE	2024.05.08		
REV	DESCRIPTION	DATE		

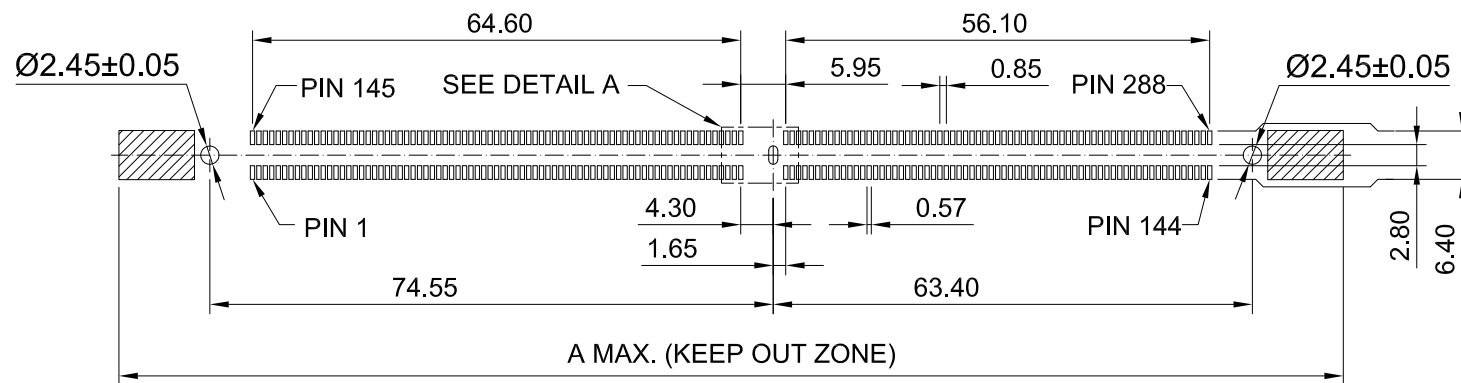

RECOMMENDED PCB LAYOUT (TOP VIEW)
TYPE F1 BOARDLOCKS



DETAIL A
SCALE 2:1

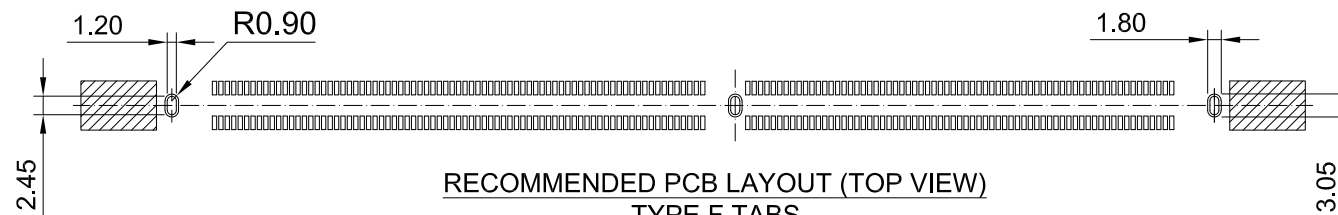

RECOMMENDED PCB LAYOUT (TOP VIEW)
TYPE F TABS



RECOMMENDED PCB LAYOUT (TOP VIEW)

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1:1	3 of 4	DDR 4, VERTICAL 288P MEMORY SOCKET SMT TYPE	
DRAWN	CHK'D	APPR'D	DRAWING NO.	
Haisen Li	Diankui Wan	Jack Yin	DDR4-0851WVX-S-FX-288P	
General Tolerances		THIRD ANGLE PROJECTION	REV	
x,x±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			A0	
REV	DESCRIPTION		DATE	

