

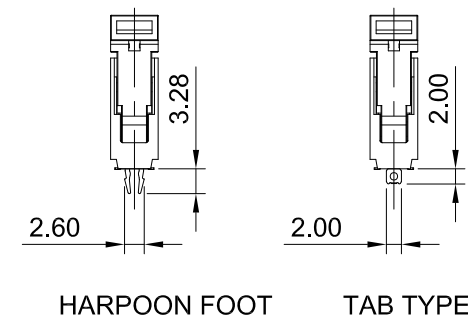
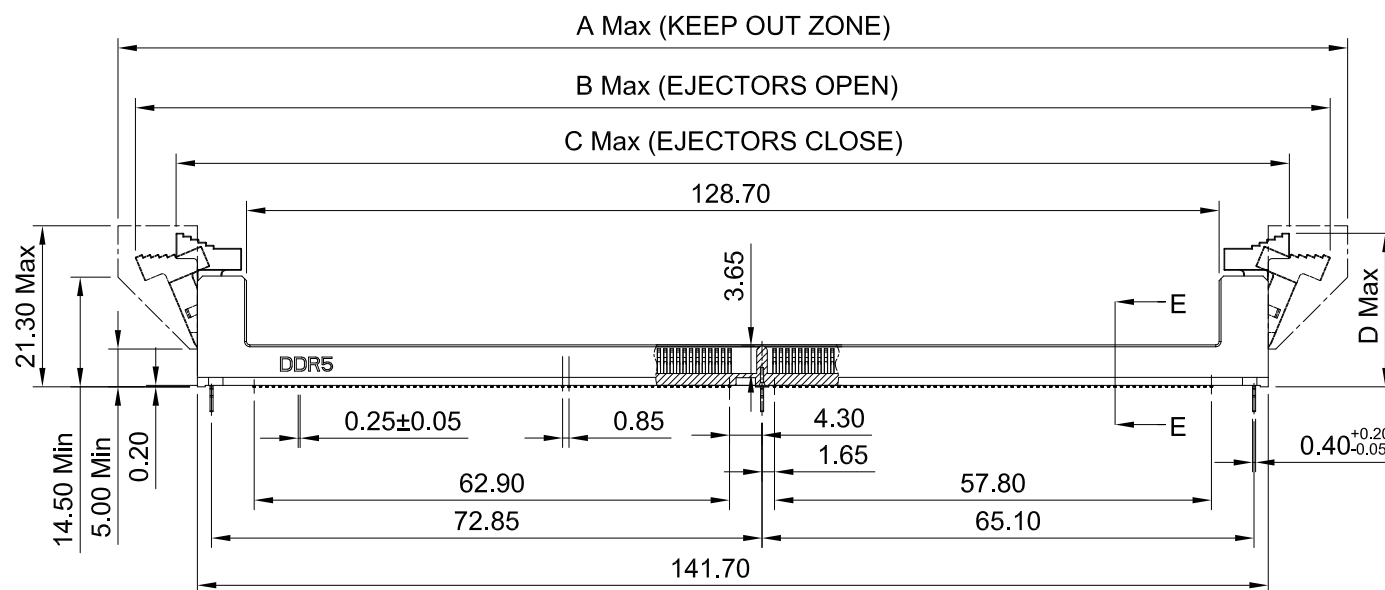


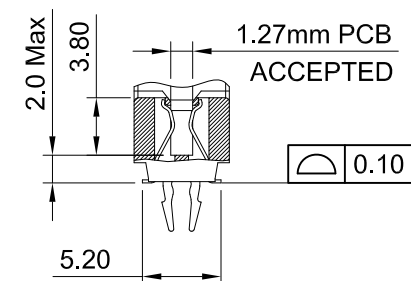


A0	NEW RELEASE	2024.05.08
REV	DESCRIPTION	DATE


			CHANGJIANG CONNECTORS CO.,LTD	
Unit	Scale	Sheet	TITLE	
mm	1:1	1 of 4	DDR 5, 288P MEMORY SOCKET SMT TYPE CONNECTOR	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances	THIRD ANGLE PROJECTION		DRAWING NO.	REV A0
$x, z \pm 0.25$ $x, xxx \pm 0.20$ $x, xxx \pm 0.15$ ANGLES $\pm 1^\circ$			DDR5-0851WVX-S-FX-288P	

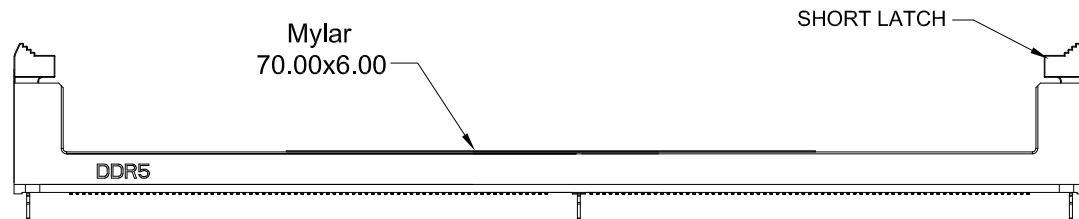

SHORT LATCH

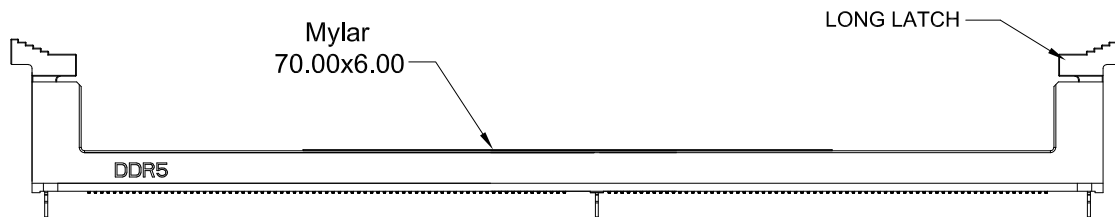

LONG LATCH
TYPE A

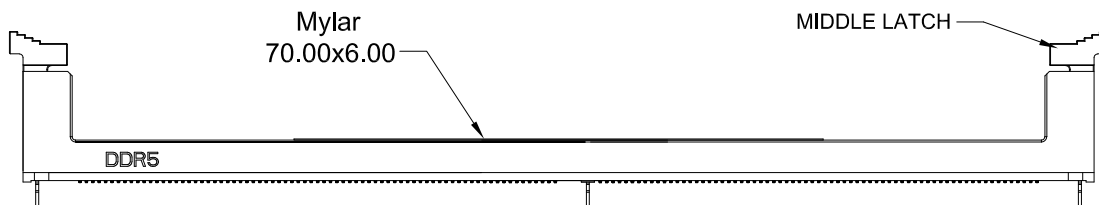

MIDDLE LATCH
TYPE B

Ordering Information:

DDR5 - 0851WVX -S- FX -288P- ** - ** - ** - **
1 2 3 4 5 6 7

- Part NO.
- Latch Type:
(Blank): Short Latch
A: Type A Long Latch
B: Type B Middle Latch
- Locating Posts Style:
(Blank): Harpoon foot
1: TAB TYPE
- Housing Color
(Blank): Black
HNA: Natural
HBL: Blue
HYL: Yellow
- Latch Color
(Blank): Black
LNA: Natural
LBL: Blue
LYL: Yellow
- Finish:
(Blank): Select Gold:15µin[0.38µm]Min.
Select reflowed matte tin: 80µin[2.03µm] Min
Overall Nickel Underplate: 30µin[0.76µm] Min.
G: Select Gold:1uin[0.025µm]Min.
Select reflowed matte tin: 80µin[2.03µm] Min
Overall Nickel Underplate: 30µin[0.76µm] Min.
G30: Select Gold:30µin[0.76µm]Min.
Select reflowed matte tin: 80µin[2.03µm] Min
Overall Nickel Underplate: 30µin[0.76µm] Min.
- Packing:
(Blank): Hard Tray
MHTR: Hard Tray With Mylar



SPECIFICATIONS:

Current Rating: 1.0A AC,DC MAX
Insulation Resistance: 1MΩ Min.500V DC
Dielectric Withstanding Voltage:500 VAC AT SEA LEVEL.
Temperature Range: -40°C ~ +105°C
PIN Material: Copper Alloy
Boardlocks And Tab: Stainless Steel 304
Tabs: Stainless Steel 304
Latch Material: Nylon 9T,UL94V-0 Halogen Free
Housing Material: Nylon 9T,UL94V-0 Halogen Free



CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	1:1	2 of 4	DDR 5, 288P MEMORY SOCKET SMT TYPE CONNECTOR	
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			DDR5-0851WVX-S-FX-288P	A0
A0	NEW RELEASE	2024.05.08		
REV	DESCRIPTION	DATE		

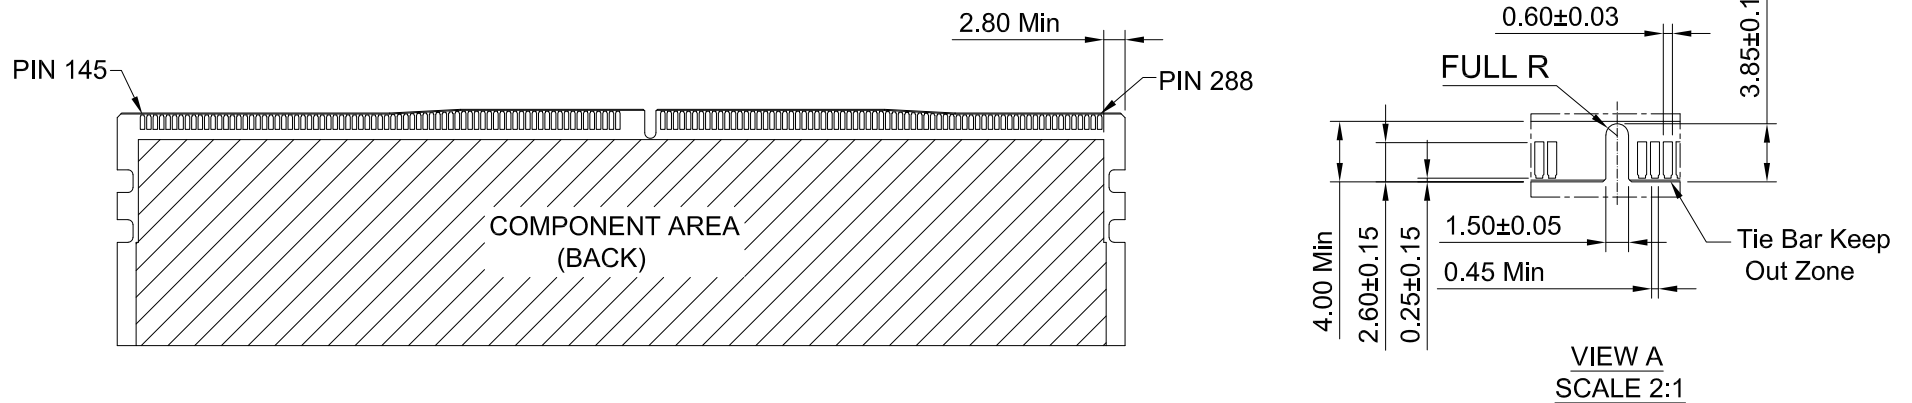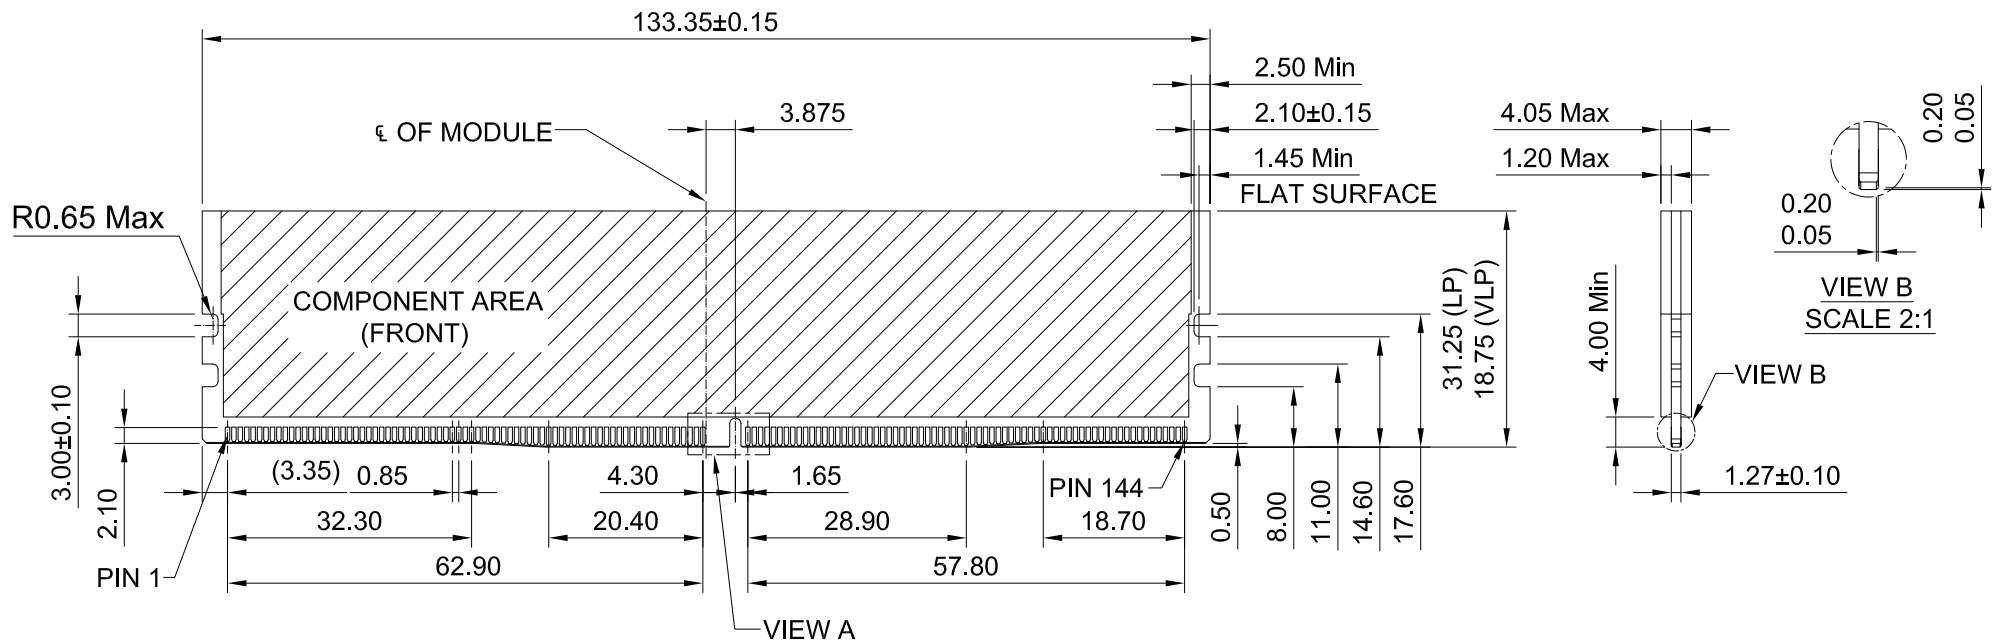

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	1:1	4 of 4	DDR 5, 288P MEMORY SOCKET SMT TYPE CONNECTOR		
DRAWN	CHK'D	APPR'D			
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			DDR5-0851WVX-S-FX-288P		A0

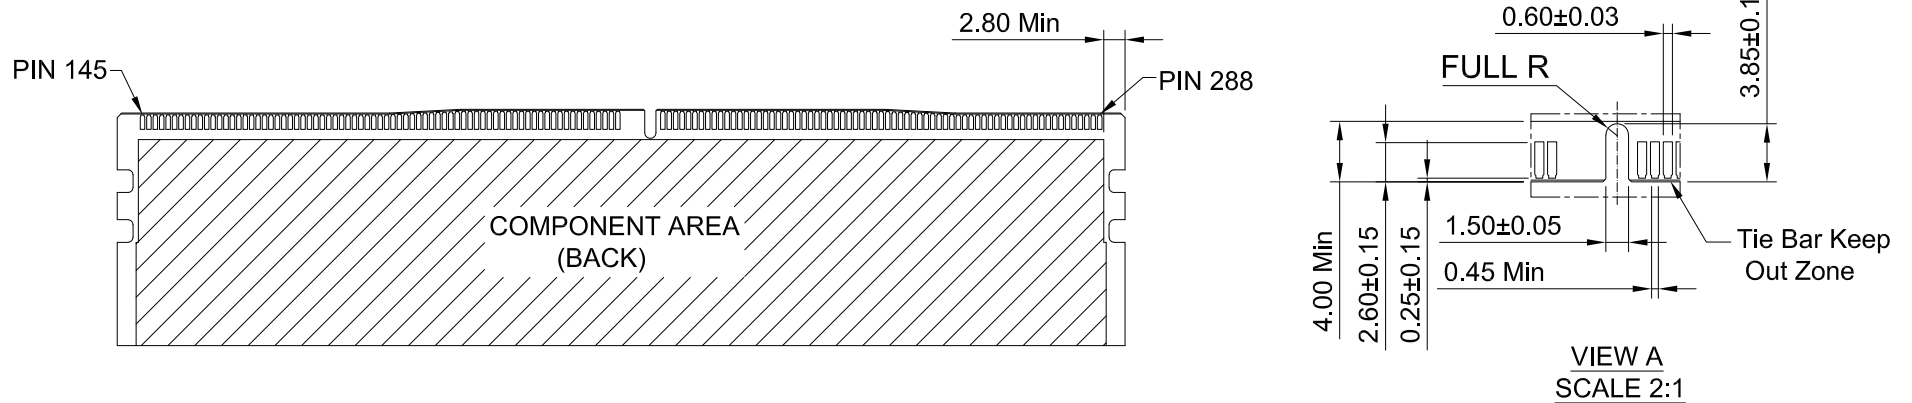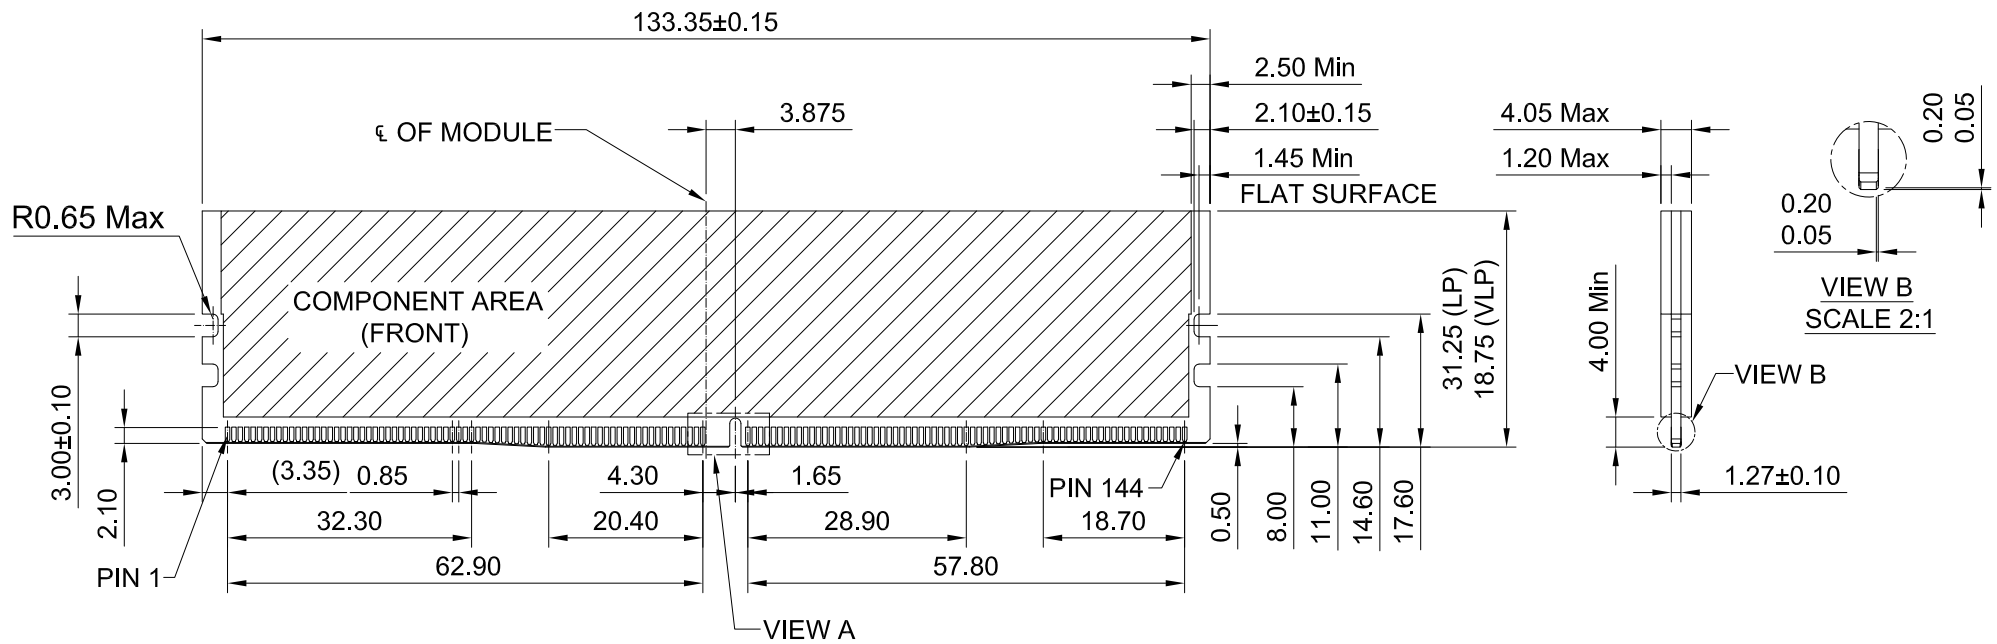

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1:1	4 of 4	DDR 5, 288P MEMORY SOCKET SMT TYPE CONNECTOR
DRAWN	CHK'D	APPR'D	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx $\pm$ 0.25 x.xxx $\pm$ 0.20 x.xxxx $\pm$ 0.15 ANGLES $\pm$ 1°			DDR5-0851WVX-S-FX-288P
REV	DESCRIPTION	DATE	REV
A0	NEW RELEASE	2024.05.08	A0