

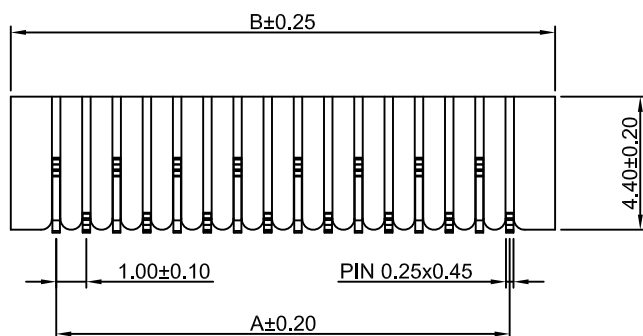
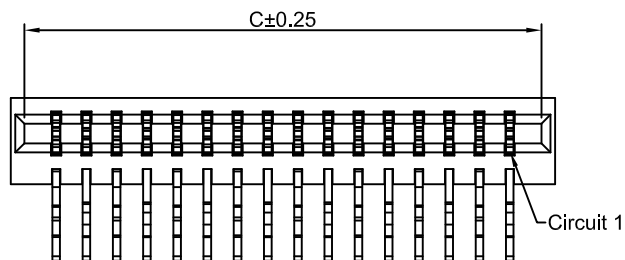
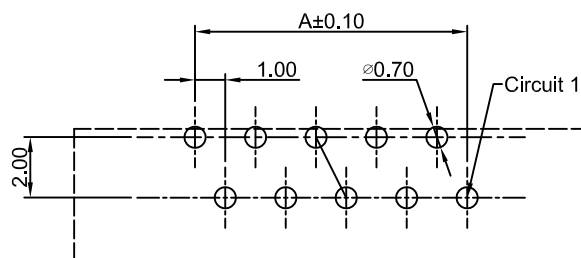


Type 1

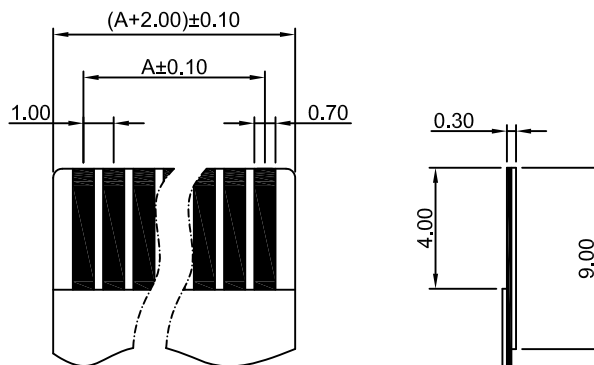


Type 2

P.C.B LAYOUT
TOLERANCE :±0.05

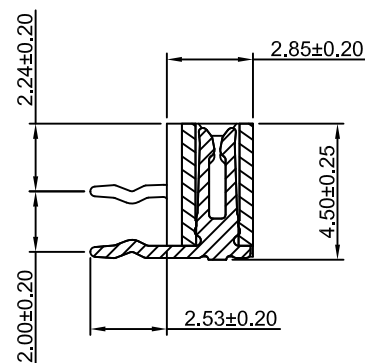

APPLICABLE FFC/FPC
TOLERANCE: ±0.05



Ordering Information:
F1001WRB-XP - *** - ***
1 2 3

- 1.Part No.
- 2.Style:
(blank) - Type 1
2 - Type 2
- 3.Finish:
(blank) - Tin over Nickel
G - Gold over Nickel

SPECIFICATIONS:

Current rating: 0.5A AC,DC
Voltage rating: 50V AC,DC
Temperature range: -40°C ~ +105°C
Contact resistance: 20mΩ Max.
Insulation resistance: 800MΩ Min.
Withstanding voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Tin over Nickel
Housing Material: LCP,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
4P	3.00	6.00	5.10	20P	19.00	22.00	21.10
5P	4.00	7.00	6.10	21P	20.00	23.00	22.10
6P	5.00	8.00	7.10	22P	21.00	24.00	23.10
7P	6.00	9.00	8.10	23P	22.00	25.00	24.10
8P	7.00	10.00	9.10	24P	23.00	26.00	25.10
9P	8.00	11.00	10.10	25P	24.00	27.00	26.10
10P	9.00	12.00	11.10	26P	25.00	28.00	27.10
11P	10.00	13.00	12.10	27P	26.00	29.00	28.10
12P	11.00	14.00	13.10	28P	27.00	30.00	29.10
13P	12.00	15.00	14.10	29P	28.00	31.00	30.10
14P	13.00	16.00	15.10	30P	29.00	32.00	31.10
15P	14.00	17.00	16.10	31P	30.00	33.00	32.10
16P	15.00	18.00	17.10	32P	31.00	34.00	33.10
17P	16.00	19.00	18.10	33P	32.00	35.00	34.10
18P	17.00	20.00	19.10	34P	33.00	36.00	35.10
19P	18.00	21.00	20.10	35P	34.00	37.00	36.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 1.00mm Pitch FFC/FPC Connector	
mm		4:1		1 of 1			
Draw By:		Approved :					
Diankui Wan		Jack Yin		DRAW NO : F1001WRB-XP			
General Tolerance							
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 					
2				REV A0			