

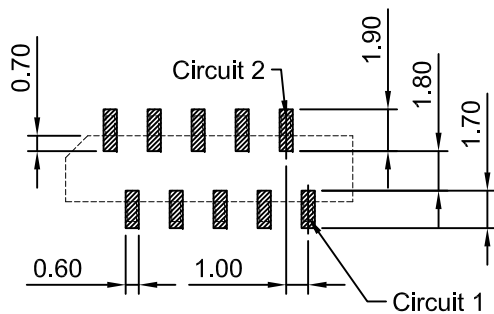
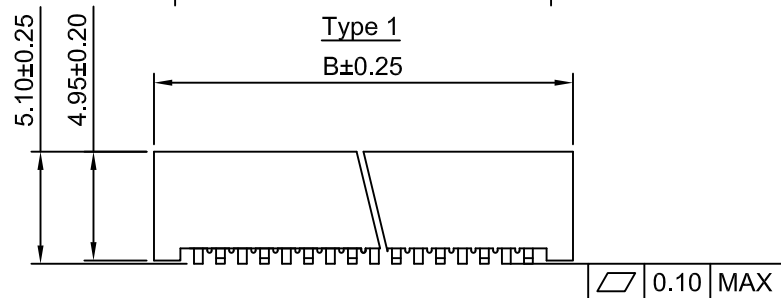


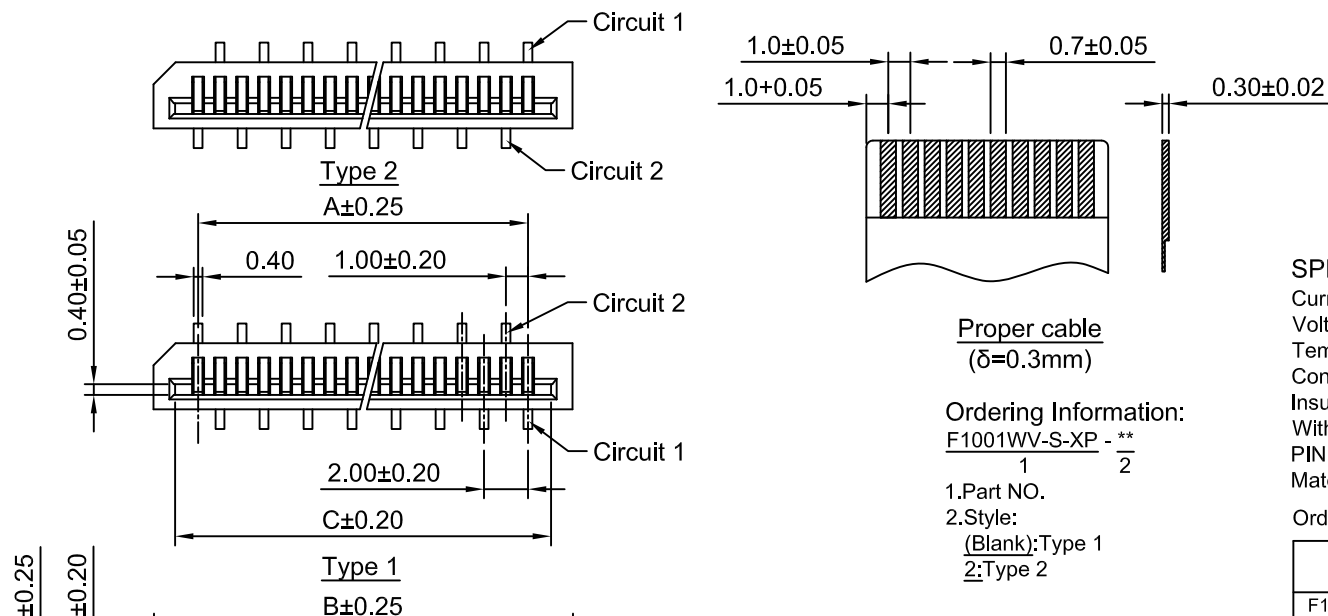

Type 1

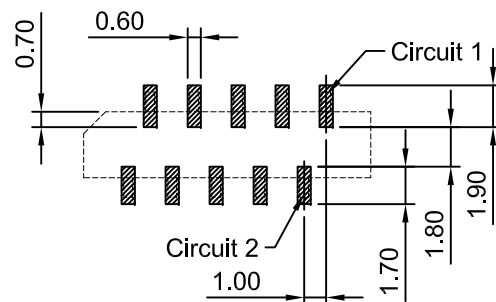

Type 2


P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

Proper cable
($\delta=0.3\text{mm}$)

Ordering Information:

F1001WV-S-XP - **
1
2

1.Part NO.
2.Style:
(Blank):Type 1
2:Type 2

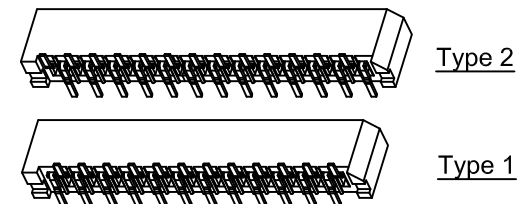

SPECIFICATIONS:

Current Rating: 0.5A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
PIN Material: Phosphor Bronze/Tin over Nickel
Material: LCP UL94V-0(Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			Part NO.	Dimensions(mm)		
	A	B	C		A	B	C
F1001WV-S-3P	2.00	6.05	4.10	F1001WV-S-22P	21.00	25.05	23.10
F1001WV-S-4P	3.00	7.05	5.10	F1001WV-S-23P	22.00	26.05	24.10
F1001WV-S-5P	4.00	8.05	6.10	F1001WV-S-24P	23.00	27.05	25.10
F1001WV-S-6P	5.00	9.05	7.10	F1001WV-S-25P	24.00	28.05	26.10
F1001WV-S-7P	6.00	10.05	8.10	F1001WV-S-26P	25.00	29.05	27.10
F1001WV-S-8P	7.00	11.05	9.10	F1001WV-S-27P	26.00	30.05	28.10
F1001WV-S-9P	8.00	12.05	10.10	F1001WV-S-28P	27.00	31.05	29.10
F1001WV-S-10P	9.00	13.05	11.10	F1001WV-S-29P	28.00	32.05	30.10
F1001WV-S-11P	10.00	14.05	12.10	F1001WV-S-30P	29.00	33.05	31.10
F1001WV-S-12P	11.00	15.05	13.10	F1001WV-S-31P	30.00	34.05	32.10
F1001WV-S-13P	12.00	16.05	14.10	F1001WV-S-32P	31.00	35.05	33.10
F1001WV-S-14P	13.00	17.05	15.10	F1001WV-S-33P	32.00	36.05	34.10
F1001WV-S-15P	14.00	18.05	16.10	F1001WV-S-34P	33.00	37.05	35.10
F1001WV-S-16P	15.00	19.05	17.10	F1001WV-S-35P	34.00	38.05	36.10
F1001WV-S-17P	16.00	20.05	18.10	F1001WV-S-36P	35.00	39.05	37.10
F1001WV-S-18P	17.00	21.05	19.10	F1001WV-S-37P	36.00	40.05	38.10
F1001WV-S-19P	18.00	22.05	20.10	F1001WV-S-38P	37.00	41.05	39.10
F1001WV-S-20P	19.00	23.05	21.10	F1001WV-S-39P	38.00	42.05	40.10
F1001WV-S-21P	20.00	24.05	22.10	F1001WV-S-40P	39.00	43.05	41.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		3:1		1 of 1			
DRWN		CHK'D		APPR		1.00mm PITCH FFC/FPC CONNECTOR - SMD TYPE	
Chengbiao Ye		DianKui Wan		Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.		REV A2	
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°							
				F1001WV-S-XP			