


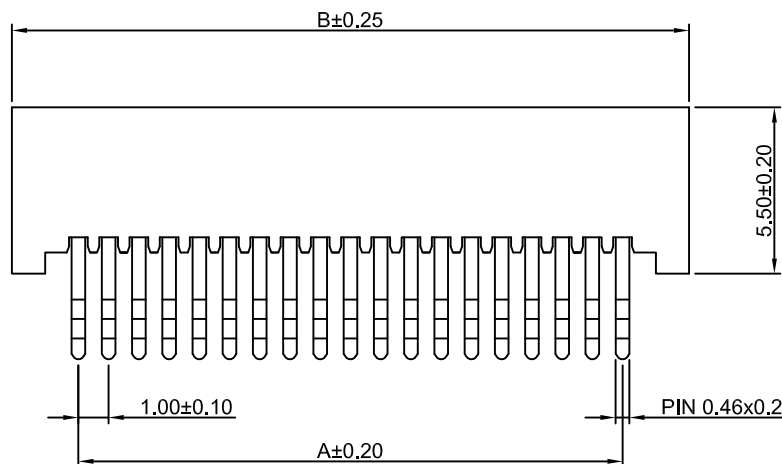

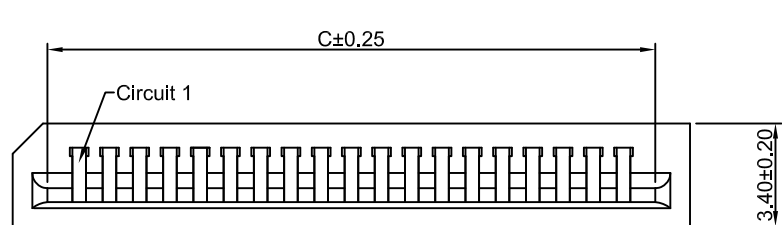


P.C.B LAYOUT
TOLERANCE :±0.05

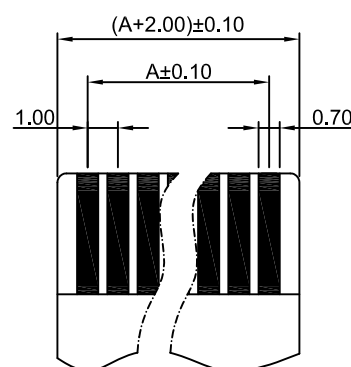

APPLICABLE FFC/FPC
TOLERANCE:±0.05



Ordering Information:

F1001WV-XP - *** - ***
1 2 3

1.Part No.

2.Style:

(blank) - Type 1

2 - Type 2

3.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel

SPECIFICATIONS:

Current rating: 0.5A AC,DC

Voltage rating: 50V AC,DC

Temperature range: -40°C ~ +105°C

Contact resistance: 20mΩ Max.

Insulation resistance: 500MΩ Min.

Withstanding voltage: 500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Housing Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions (mm)			Circuits	Dimensions (mm)			Circuits	Dimensions (mm)		
	A	B	C		A	B	C		A	B	C
3P	2.00	6.50	4.10	16P	15.00	19.50	17.10	29P	28.00	32.50	30.10
4P	3.00	7.50	5.10	17P	16.00	20.50	18.10	30P	29.00	33.50	31.10
5P	4.00	8.50	6.10	18P	17.00	21.50	19.10	31P	30.00	34.50	32.10
6P	5.00	9.50	7.10	19P	18.00	22.50	20.10	32P	31.00	35.50	33.10
7P	6.00	10.50	8.10	20P	19.00	23.50	21.10	33P	32.00	36.50	34.10
8P	7.00	11.50	9.10	21P	20.00	24.50	22.10	34P	33.00	37.50	35.10
9P	8.00	12.50	10.10	22P	21.00	25.50	23.10	35P	34.00	38.50	36.10
10P	9.00	13.50	11.10	23P	22.00	26.50	24.10	36P	35.00	39.50	37.10
11P	10.00	14.50	12.10	24P	23.00	27.50	25.10	37P	36.00	40.50	38.10
12P	11.00	15.50	13.10	25P	24.00	28.50	26.10	38P	37.00	41.50	39.10
13P	12.00	16.50	14.10	26P	25.00	29.50	27.10	39P	38.00	42.50	40.10
14P	13.00	17.50	15.10	27P	26.00	30.50	28.10	40P	39.00	43.50	41.10
15P	14.00	18.50	16.10	28P	27.00	31.50	29.10				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance	
x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

Title :	
1.00mm Pitch	
FFC/FPC Connector	
DRAW NO :	F1001WV-XP
REV	A0