
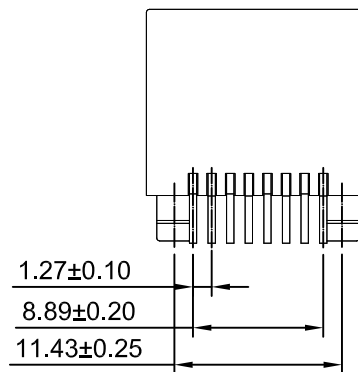
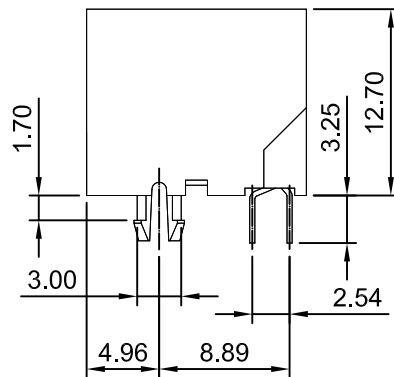
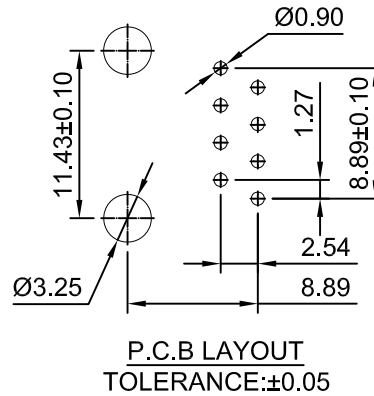


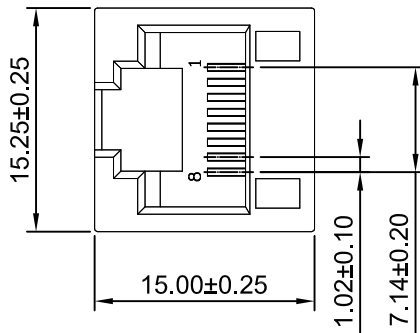

Ordering Information:

RJ45-8P-A-CJ - ***
1 2

1.Part NO.

2.Finish:

(Blank): Gold over Nickel and Tin over Nickel

GT6: Gold over Nickel(Au:6µin[0.15µm] Min,Tin Plated,Other Area)

G15: Gold over Nickel(Au:15µin[0.38µm] Min,Tin Plated,Other Area)

GT30: Gold over Nickel(Au:30µin[0.76µm] Min,Tin Plated,Other Area)

GT50: Gold over Nickel(Au:50µin[1.27µm] Min,Tin Plated,Other Area)

T: Tin over Nickel

SPECIFICATIONS:

Current Rating: 1.5A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +85°C

Contact Resistance: 40mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze

Material: Engineering Thermoplastic,UL94V-0(Black)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1		
DRAWN	CHK'D	APPR'D		
Haisen Li	Diankui Wan	Jack Yin		
			RJ45 WAFER	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.xx±0.38 x.xx±0.25 x.xxx±0.10 ANGLES ±1°				
			RJ45-8P-A-CJ	
			REV A0	

A0	NEW RELEASE	2024.01.19
REV	DESCRIPTION	DATE