

Specifications

Current rating:5A AC,DC

Voltage rating:250V AC,DC

Temperature range:-40°C~+105°C

Contact resistance:20mΩMax.

Insulation resistance:5000MΩMin.

Withstanding voltage:1500V AC/minute

Compliant with RoHS and REACH

*Meet the HF/Halogen Free,GWT/Glow wire
Test (IEC60335-1) request,need to
customize*


Contact CJT for details

B3962-T

3.96mm pitch Crimp Terminal

Reference Informations:

*Used in CJT B3962H-2xXP series Housing

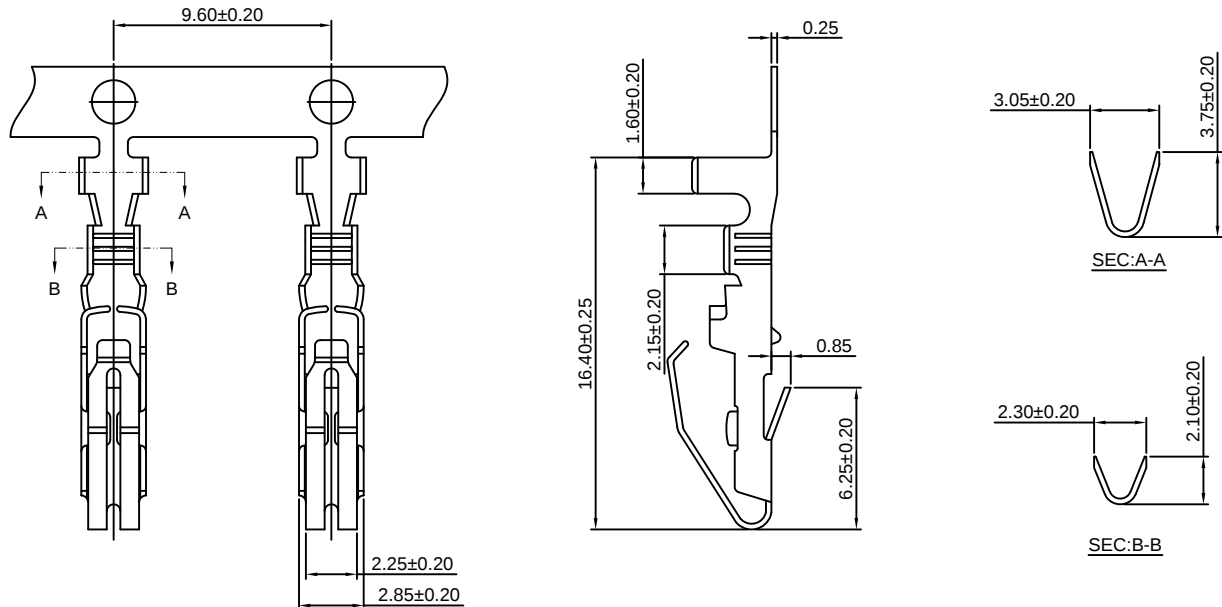

Ordering information & Specifications:

Unit:mm

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
B3962-TB	AWG#18-#24	3.10mm(max)	Brass	Tin over Nickel	5,000 PCS
B3962-GB	AWG#18-#24	3.10mm(max)	Brass	Gold over Nickel	5,000 PCS

Optional Gold plating available but MOQ requested

B3962H-2xXP

3.96mm pitch Housing

Reference Informations:


*Material:PBT,UL94V-0

*Suitable CJT B3962-T series Terminal

*Color:Black

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	Z	a	b	c	d	e	f	g	h	i	j
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36

Circuit Identification On Side Surface

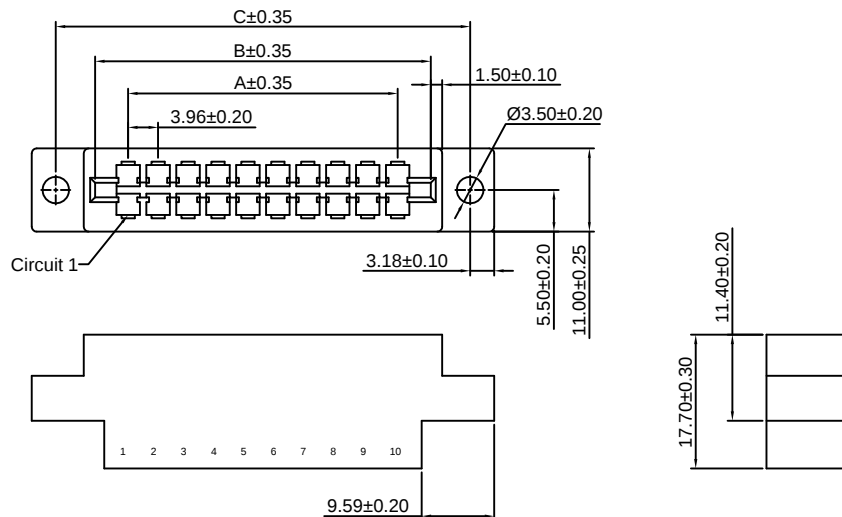

Ordering Information & Dimensions:

PART NO.	Dimensions		
	A	B	C
2x10P	35.64	44.40	54.80
2x18P	67.32	75.80	86.50
2x22P	83.16	91.70	102.40
2x28P	103.92	115.40	126.00
2x36P	138.60	147.40	153.20

Unit: mm