



Specifications

Current rating:0.5A AC,DC
Voltage rating:30V AC,DC
Temperature range:-40°C~+105°C
Contact resistance:20mΩMax.
Insulation resistance:100MΩMin.
Withstanding voltage:200V AC/minute
Compliant with RoHS and REACH
Meet the HF/Halogen Free,need to customize
Contact CJT for details

Standards



Assembly layout

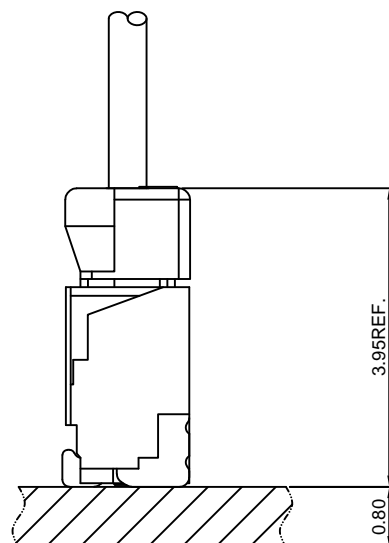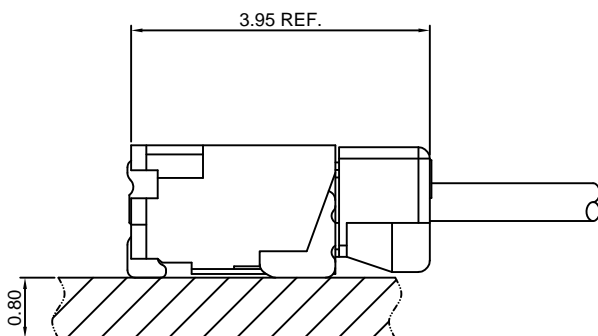

D0801H-XP





0.80mm pitch Insulation Displacement Connector

Reference Informations:

- *Material: Terminal: Phosphor Bronze/Tin over Nickel
Housing: Nylon 46, UL94V-0
- *Mates with CJT D0801WV-S, WR-S-XP series Wafer
- *Color: Beige

Ordering Information:

- D0801H-XP - *** - **
1 2 3
- 1: Part No.
 - 2: Material:
(blank): Nylon 46, UL94V-0
GWT: Nylon 46, UL94V-0, GWT 750°C
 - 3: Color:
(blank): Beige=32AWG
YL: Yellow=36AWG

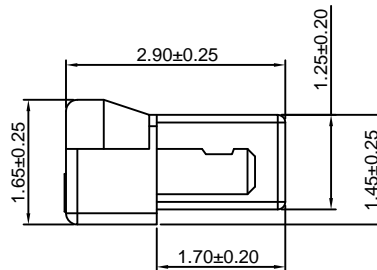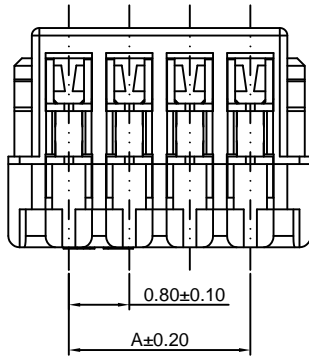

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	0.80	2.40
3P	1.60	3.20
4P	2.40	4.00
5P	3.20	4.80
6P	4.00	5.60
7P	4.80	6.40
8P	5.60	7.20
9P	6.40	8.00
10P	7.20	8.80
11P	8.00	9.60
12P	8.80	10.40
13P	9.60	11.20
14P	10.40	12.00
15P	11.20	12.80
16P	12.00	13.60
17P	12.80	14.40
18P	13.60	15.20
19P	14.40	16.00
20P	15.20	16.80
21P	16.00	17.60
22P	16.80	18.40

Unit: mm

D0801WV-S-XP






0.80mm pitch 180° Wafer - SMT TYPE

Reference Informations:

- *Material: Terminal: Phosphor Bronze/Tin over Nickel
Solder Tabs: Brass/Tin over Nickel
Housing: Nylon 6T, UL94V-0
- *Mates with CJT D0801H-XP, A0801H-XP(-2) series Housing
- *Color: Beige

Ordering Information:

- D0801WV-S-XP - ***
1 2
- 1: Part No.
 - 2: Material:
(blank): Nylon 6T, UL94V-0
GWT: Nylon 6T, UL94V-0, GWT 750°C

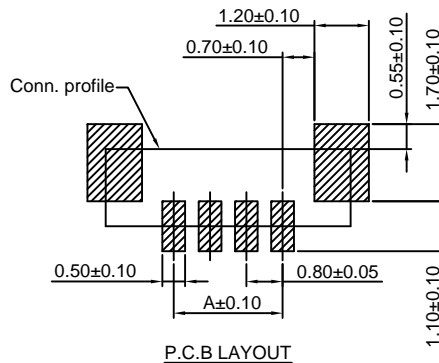

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	0.80	3.80
3P	1.60	4.60
4P	2.40	5.40
5P	3.20	6.20
6P	4.00	7.00
7P	4.80	7.80
8P	5.60	8.60
9P	6.40	9.40
10P	7.20	10.20
11P	8.00	11.00
12P	8.80	11.80
13P	9.60	12.60
14P	10.40	13.40
15P	11.20	14.20
16P	12.00	15.00
17P	12.80	15.80
18P	13.60	16.60
19P	14.40	17.40
20P	15.20	18.20
21P	16.00	19.00
22P	16.80	19.80

Unit: mm

D0801WR-S-XP



0.80mm pitch 90° Wafer - SMT TYPE

Reference Informations:

- *Material:
 - Terminal: Phosphor Bronze/Tin over Nickel
 - Solder Tabs: Brass/Tin over Nickel
 - Housing: Nylon 6T, UL94V-0
- *Mates with CJT D0801H-XP, A0801H-XP(-2) series Housing
- *Color: Beige

Ordering Information:

- D0801WR-S-XP - ***
- | | |
|---|---|
| 1 | 2 |
|---|---|
- 1: Part No.
 - 2: Material:
 - (blank): Nylon 6T, UL94V-0
 - GWT: Nylon 6T, UL94V-0, GWT 750°C

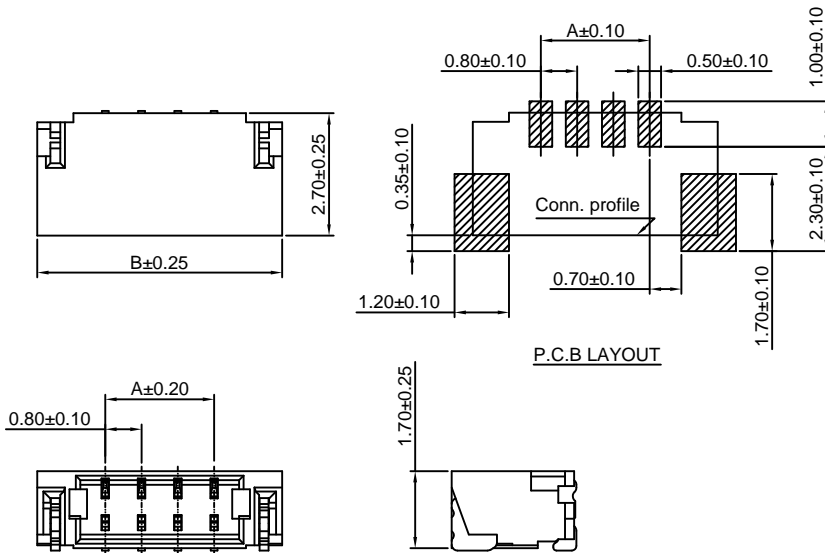

Ordering Information & Dimensions:

PART NO.	Dimensions	
	A	B
2P	0.80	3.80
3P	1.60	4.60
4P	2.40	5.40
5P	3.20	6.20
6P	4.00	7.00
7P	4.80	7.80
8P	5.60	8.60
9P	6.40	9.40
10P	7.20	10.20
11P	8.00	11.00
12P	8.80	11.80
13P	9.60	12.60
14P	10.40	13.40
15P	11.20	14.20
16P	12.00	15.00
17P	12.80	15.80
18P	13.60	16.60
19P	14.40	17.40
20P	15.20	18.20
21P	16.00	19.00
22P	16.80	19.80

Unit: mm