


Ordering Information:

A2549HB-XP - **
1 2

- 1.Part No.
- 2.Color:
(blank):Blue
BK:Black


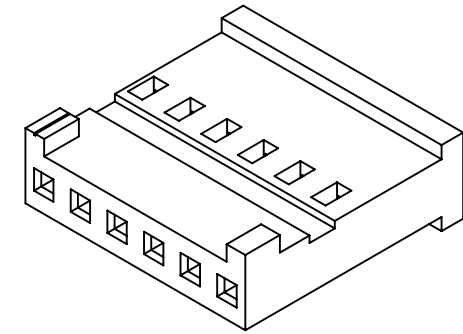


SPECIFICATIONS:

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66+15%GF,UL94V-0(Blue)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.54	5.08	8P	17.78	20.32
3P	5.08	7.62	9P	20.32	22.86
4P	7.62	10.16	10P	22.86	25.40
5P	10.16	12.70	12P	27.94	30.48
6P	12.70	15.24	15P	35.56	38.10
7P	15.24	17.78	18P	43.18	45.72

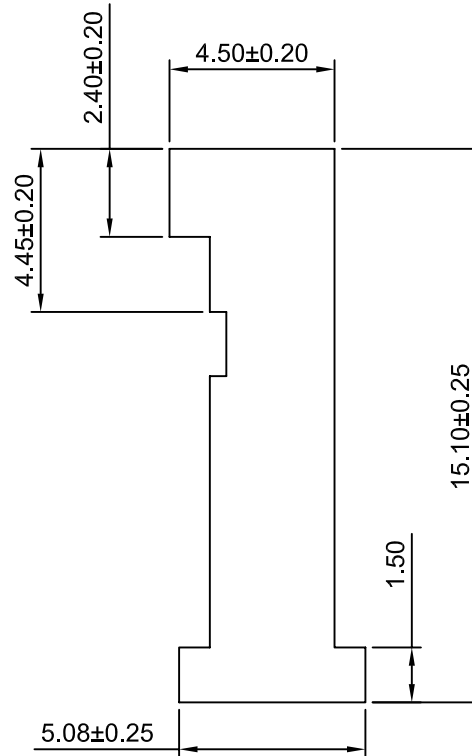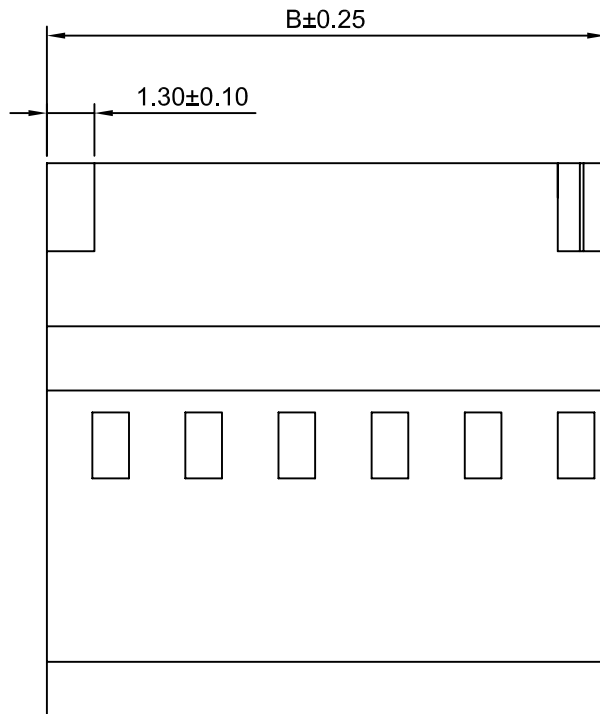

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
Draw BY:	Approved :	
Moore	GONGYB	

Title :
2.54mm PITCH
Single Row Housing

REV	DESCRIPTION	DATE	General Tolerance	ANGLE±
A1	Change the size	2013.10.20	x.xx≤0.25	
A0	NEW RELELEASE	2011.05.13	x.xxx≤0.20	
			x.xxxx≤0.15	

DRAW NO : **A2549HB-XP** REV **A1**