
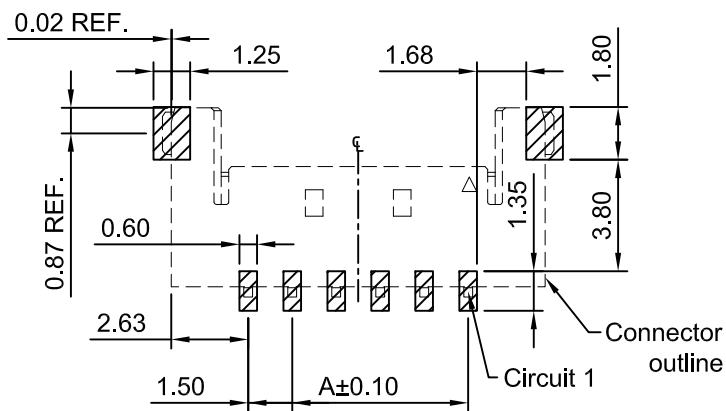
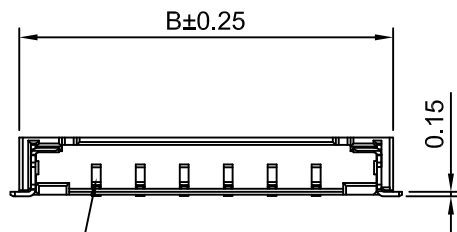



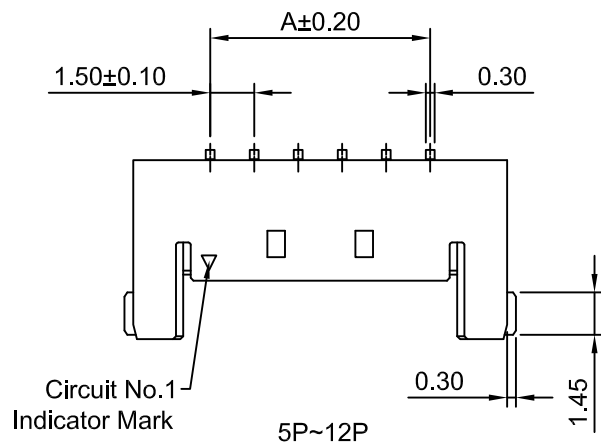

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

Ordering Information:

A1501WRB-S-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 9T,UL94V-0

GWT: Nylon 9T,UL94V-0,IEC 60335-1,5th Edition
Glow Wire Capable.

3.Finish

(Blank): Gold over Nickel

T: Tin over Nickel

SPECIFICATIONS:

Current Rating: 3.5A AC,DC (AWG #24)

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Gold over Nickel

Solder Tabs: Brass/Tin over Nickel

Material: Nylon 9T,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1501WRB-S-2P	1.50	6.75
A1501WRB-S-3P	3.00	8.25
A1501WRB-S-4P	4.50	9.75
A1501WRB-S-5P	6.00	11.25
A1501WRB-S-6P	7.50	12.75
A1501WRB-S-7P	9.00	14.25
A1501WRB-S-8P	10.50	15.75
A1501WRB-S-9P	12.00	17.25
A1501WRB-S-10P	13.50	18.75
A1501WRB-S-11P	15.00	20.25
A1501WRB-S-12P	16.50	21.75

A7	CHANGE THE DRAWING	2023.02.20
A6	CHANGE THE DRAWING	2021.01.18
A5	CHANGE THE INFORMATION	2020.03.06
A4	CHANGE THE DRAWING	2019.06.14
A3	ADD THE DRAWING OF 2P~4P	2019.05.13
A2	CHANGE THE CURRENT RATING	2019.02.18
A1	MODIFY DRAWING	2017.09.20
A0	NEW RELEASE	2017.09.14
REV	DESCRIPTION	DATE

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
DRWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25		
x.xx±0.20		
x.xxx±0.15		
ANGLES ±1°		

TITLE		
1.50mm PITCH 90° WAFER - SMD TYPE		
DRAWING NO.		REV
A1501WRB-S-XP		A7