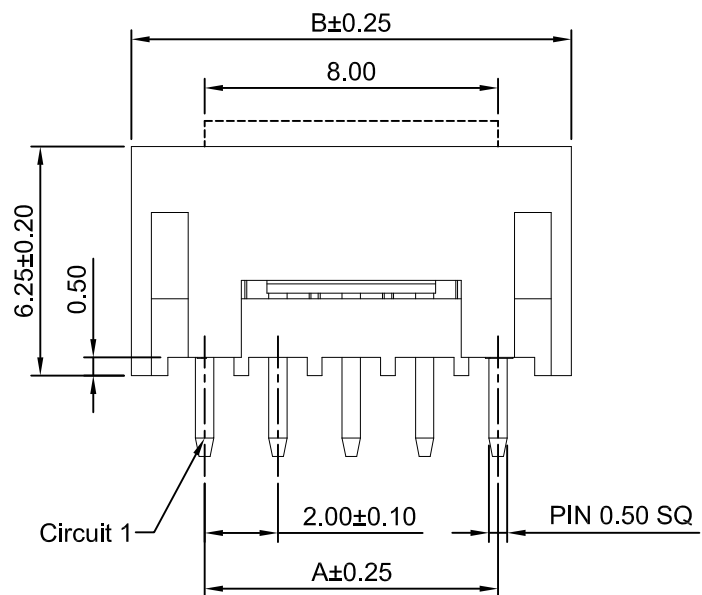
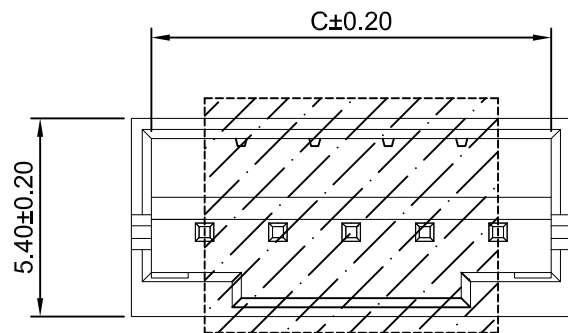


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:
A2001WVA-XP-P-LCP - ^{**}/₂ - ^{***}/₃

1.Part No.

2.Finish:

(Blank): Tin over Nickel

G:Gold over Nickel (Au:1u")

G3: Gold over Nickel(Au:3u")


G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

3.Packing:

(Blank): Bag

CRE: Tape & Reel with cap

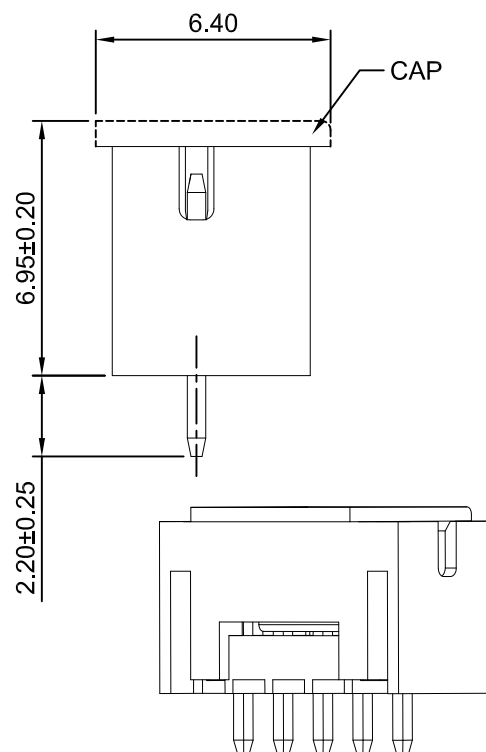

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: LCP,UL94V-0(Beige)





Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
A2001WVA-2P-P-LCP	2.00	6.00	4.90
A2001WVA-3P-P-LCP	4.00	8.00	6.90
A2001WVA-4P-P-LCP	6.00	10.00	8.90
A2001WVA-5P-P-LCP	8.00	12.00	10.90
A2001WVA-6P-P-LCP	10.00	14.00	12.90
A2001WVA-7P-P-LCP	12.00	16.00	14.90
A2001WVA-8P-P-LCP	14.00	18.00	16.90
A2001WVA-9P-P-LCP	16.00	20.00	18.90
A2001WVA-10P-P-LCP	18.00	22.00	20.90
A2001WVA-11P-P-LCP	20.00	24.00	22.90
A2001WVA-12P-P-LCP	22.00	26.00	24.90
A2001WVA-13P-P-LCP	24.00	28.00	26.90
A2001WVA-14P-P-LCP	26.00	30.00	28.90
A2001WVA-15P-P-LCP	28.00	32.00	30.90
A2001WVA-16P-P-LCP	30.00	34.00	32.90






CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH VERTICAL WAFER	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2001WVA-XP-P-LCP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
A0	NEW RELEASE	2020.10.12	REV A0	
REV	DESCRIPTION	DATE		

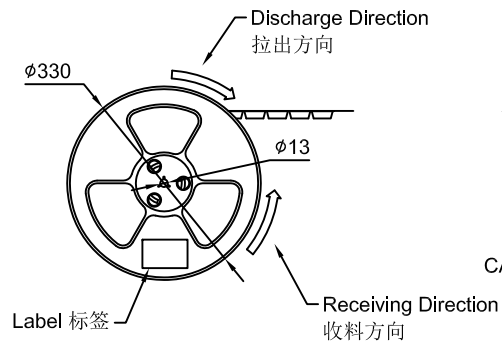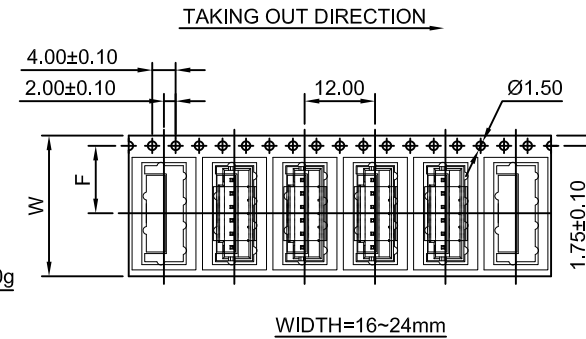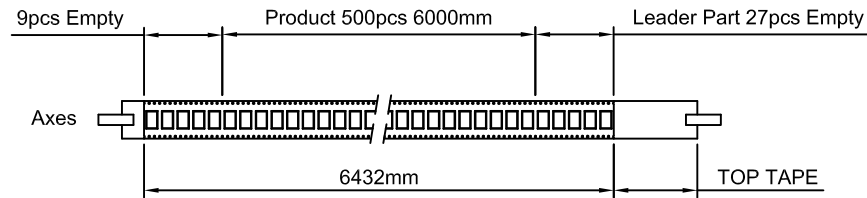

Single hole:None Hole Side
单孔: 贴无链孔侧
Double hole:Elliptical Hole Side
双孔: 贴椭圆孔侧

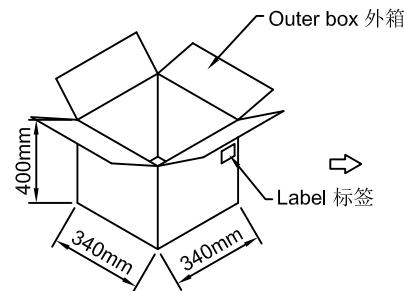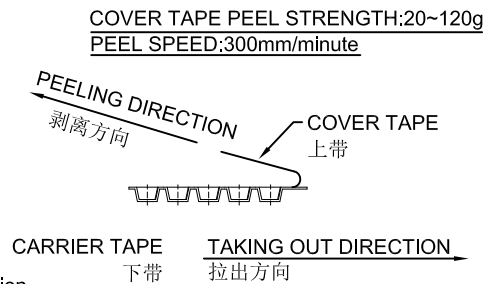

Circuits	W	S	F	T	G	REEL /PCS	CARTON /R	CARTON /PCS
2P~3P	16.00	/	7.50	20.50	16.50	500	19	9500
4P~6P	24.00	/	11.50	28.50	24.50	500	13	6500

NOTES:

- Carrier Camber Is Within 1mm In 100mm;带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance±0.20mm;圆孔十个孔距离累计允许公差为±0.20mm

A0	NEW RELEASE	2024.11.16
REV	DESCRIPTION	DATE

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	1:1.25	1 of 1	2.00mm PITCH VERTICAL WAFER PACKING	
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			REV A0	