


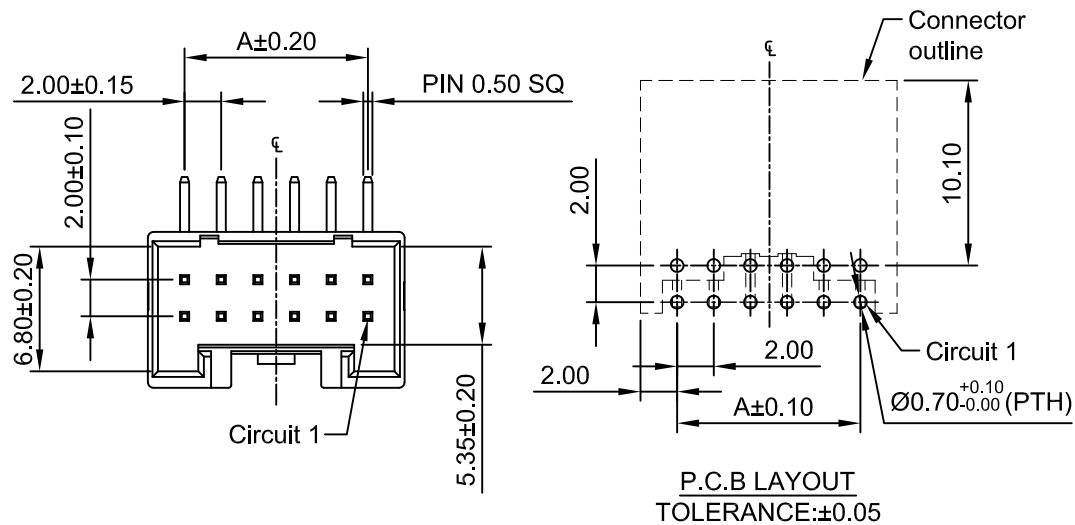

Ordering Information:

A2006WRU-2xXP - $\frac{***}{2}$ - $\frac{***}{3}$ - $\frac{*}{4}$

1.Part NO.

2.Size L

(Blank): 3.00mm

L18: 1.80mm

3.Color

(Blank): Natural

BK: Black

CB: Cobalt Blue

DP: Dark Durple

IV: Ivory

DPK: Dark pink

LE: Light blue

TR: Tomato red

4.Finish

(Blank): Tin over Nickel

G: Gold over Nickel

BL: Blue

DO: Dark Orange

DH: Dark Gray

OR: Orange

MG: Moss green

LY: Lemon yellow

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.



Withstanding Voltage: 800V AC/minute

Pin Material: Brass


Material: PA4T,UL94V-0,Halogen Free

Ordering Information & Dimensions


Part NO.	Dimensions(mm)	
	A	B
A2006WRU-2x4P	6.00	10.00
A2006WRU-2x5P	8.00	12.00
A2006WRU-2x6P	10.00	14.00
A2006WRU-2x7P	12.00	16.00
A2006WRU-2x8P	14.00	18.00
A2006WRU-2x9P	16.00	20.00
A2006WRU-2x10P	18.00	22.00
A2006WRU-2x11P	20.00	24.00
A2006WRU-2x12P	22.00	26.00
A2006WRU-2x13P	24.00	28.00
A2006WRU-2x14P	26.00	30.00
A2006WRU-2x15P	28.00	32.00
A2006WRU-2x16P	30.00	34.00
A2006WRU-2x17P	32.00	36.00
A2006WRU-2x18P	34.00	38.00
A2006WRU-2x19P	36.00	40.00
A2006WRU-2x20P	38.00	42.00




2x4P~2x7P Without Guideway
2x8P~2x20P With Guideway



2x4P~2x5P



2x6P~2x9P



2x10P~2x20P

A3	CHANGE THE INFORMATION	2022.12.26
A2	CHANGE THE INFORMATION	2021.02.01
A1	CHANGE THE DRAWING	2017.08.11
A0	NEW RELEASE	2016.07.20
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	2.5:1	1 of 1	2.00mm PITCH RIGHT ANGLE DUAL ROW WAFER
DRAWN	CHKD	APPR	
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO. A2006WRU-2xXP
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A3