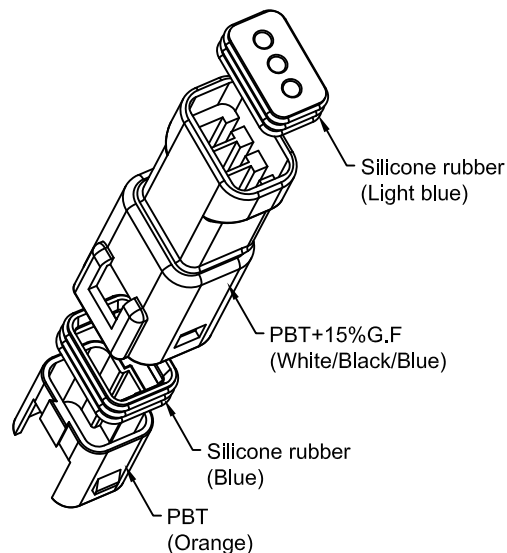
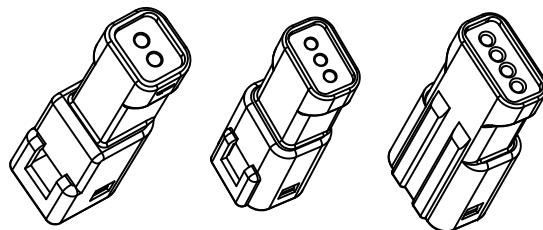


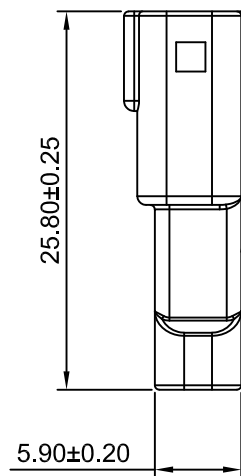
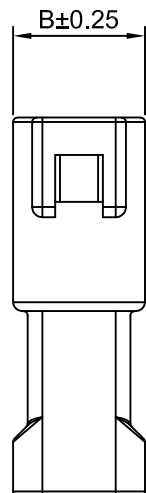
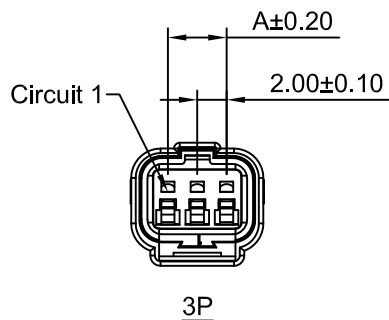


Ordering Information:

A2009HMA-XP - ***
1 2

1.Part NO.

2.Color:

(Blank): White

BK: Black

BL: Blue

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -55°C ~ +85°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material: PBT+15%G.F,UL94V-0(White)

Ingress Protection: IPX7 of IEC60529

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2009HMA-2P	2.00	7.00
A2009HMA-3P	4.00	9.00
A2009HMA-4P	6.00	11.00

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1			
DRAWN	CHK'D	APPR			
Haisen Li	Diankui Wan	Jack Yin	2.00mm PITCH SINGLE ROW HOUSING		
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO.		REV A4
			A2009HMA-XP		

REV	DESCRIPTION	DATE
A4	CHANGE THE INFORMATION	2021.03.12
A3	CHANGE THE TEMPERATURE RANGE	2019.09.30
A2	ADD THE INGRESS PROTECTION	2019.08.12
A1	ADD THE DRAWING OF 2P&4P	2019.05.07
A0	NEW RELEASE	2018.12.10