

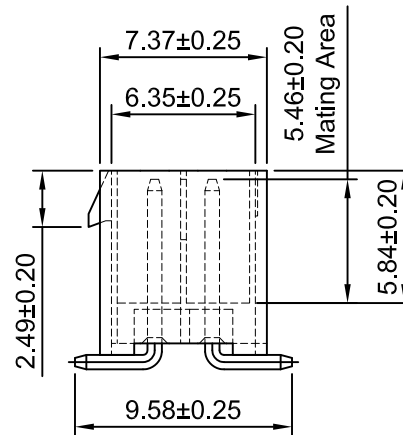
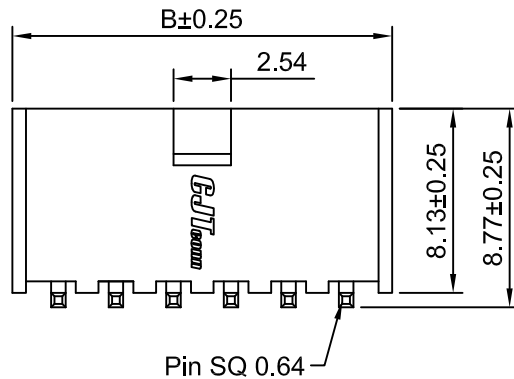


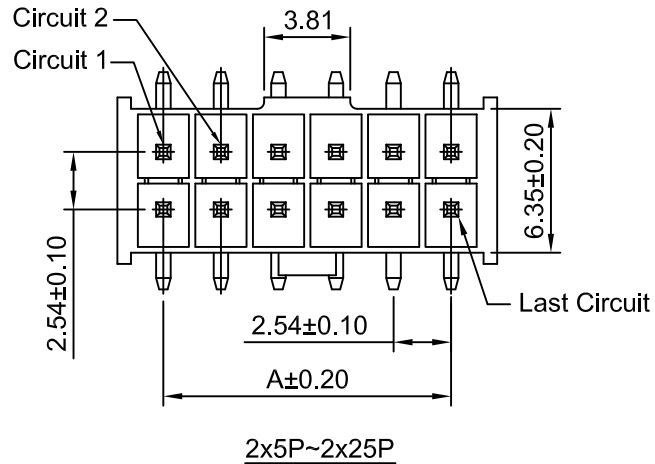

Ordering Information:
A2549WVI-S-XP - ** - ***
1 2 3

- Part No.
- Material:
(Blank):LCP,UL94V-0
- Color:
(Blank):Ivory
BK:Black
- Finish:
(Blank):Tin over Nickel
G:1μin(0.025μm)MIN.Select Gold
100μin(2.54μm)MIN.Select Tin
G10:10μin(0.25μm)MIN.Select Gold
100μin(2.54μm)MIN.Select Tin
G15:15μin(0.38μm)MIN.Select Gold
100μin(2.54μm)MIN.Select Tin
G30:30μin(0.76μm)MIN.Select Gold
100μin(2.54μm)MIN.Select Tin

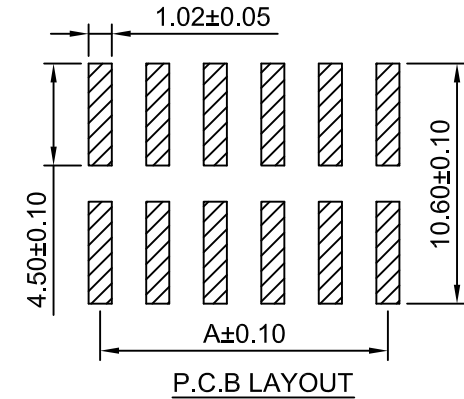


SPECIFICATIONS:


Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass

Ordering Information & Dimensions


Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	6.60	2x14P	33.02	37.08
2x3P	5.08	9.14	2x15P	35.56	39.62
2x4P	7.62	11.68	2x16P	38.10	42.16
2x5P	10.16	14.22	2x17P	40.64	44.70
2x6P	12.70	16.76	2x18P	43.18	47.24
2x7P	15.24	19.30	2x19P	45.72	49.78
2x8P	17.78	21.84	2x20P	48.26	52.32
2x9P	20.32	24.38	2x21P	50.80	54.86
2x10P	22.86	26.92	2x22P	53.34	57.40
2x11P	25.40	29.46	2x23P	55.88	59.94
2x12P	27.94	32.00	2x24P	58.42	62.48
2x13P	30.48	34.54	2x25P	60.96	65.02



2x2P
2:1



2x3P
2:1



2x4P
2:1

CJT CHANGJIANG CONNECTORS CO.,LTD.

			mm	3:1	1 of 1	2.54mm Pitch Vertical Wafer-SMT Type	
A3	CHANGE THE DRAWING	2022.10.07	DRAWN	CHK'D	APPR		
A2	CHANGE THE INFORMATION	2021.04.22	Haisen Li	Diankui Wan	Jack Yin	DRAWING NO. A2549WVI-S-2xXP	
A1	CHANGE THE COLOR	2019.04.24	General Tolerances				
A0	NEW RELEASE	2014.04.25	x.xxx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION 	
REV	DESCRIPTION	DATE					
						REV A3	