
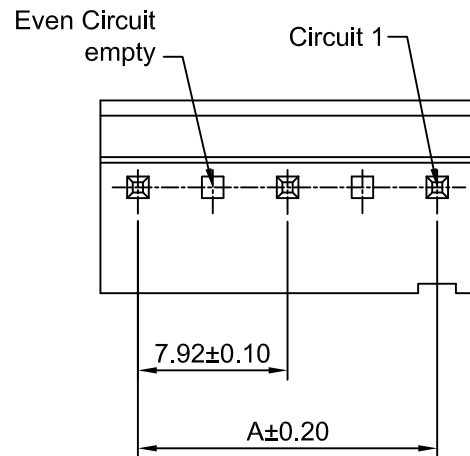
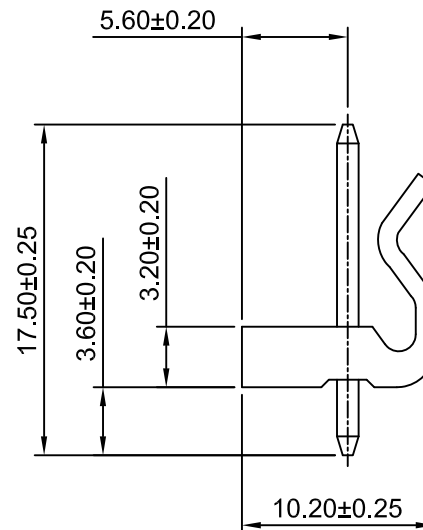


P.C.B LAYOUT

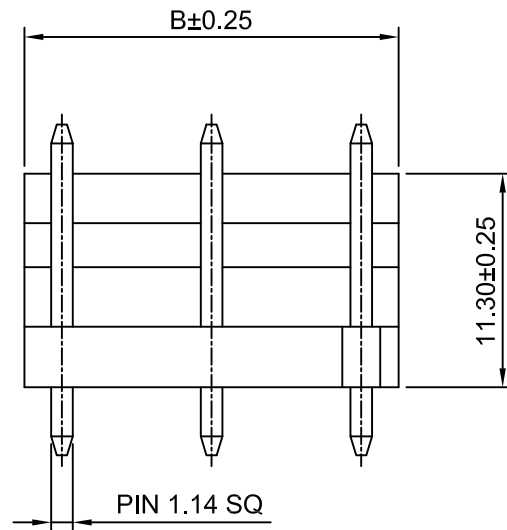

Ordering Information:

A3961WV-XP-A - ** - ***
1 2 3

1.Part No.

2.Material:

(blank) - Nylon 66,UL94V-2

V0 - Nylon 66,UL94V-0

GWT - Nylon 66,UL94V-0,GWT 750 °C

3.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-2(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	7.92	11.88	13P	47.52	51.48
5P	15.84	19.80	15P	55.44	59.40
7P	23.76	27.72	17P	63.36	67.32
9P	31.68	35.64	19P	71.28	75.24
11P	39.60	43.56			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit: mm
Scale: 2.5:1
Sheet: 1 of 1

Draw By: Diankui Wan
Approved: Jack Yin

General Tolerance

x.xx±0.25
x.xx±0.20
x.xxx±0.15
PROJECT

Title: 3.96mm Pitch

180° Wafer

DRAW NO: A3961WV-XP-A

REV A1

REV	DESCRIPTION	DATE
A1	ADD THE INFORMATION	2019.11.29
A0	NEW RELEASE	2012.09.08