

Specifications

Current rating:1.5A AC,DC

Voltage rating:15V AC,DC

Temperature range:-40°C~+105°C

Contact resistance:20mΩMax.

Insulation resistance:1000MΩMin.

Withstanding voltage:500V AC/minute

Compliant with RoHS and REACH

Meet the HF/Halogen Free,need to customize


Contact CJT for details

A1271-T

1.27mm pitch Crimp Terminal

Reference Informations:

*Used in CJT A1271H-15P series Housing

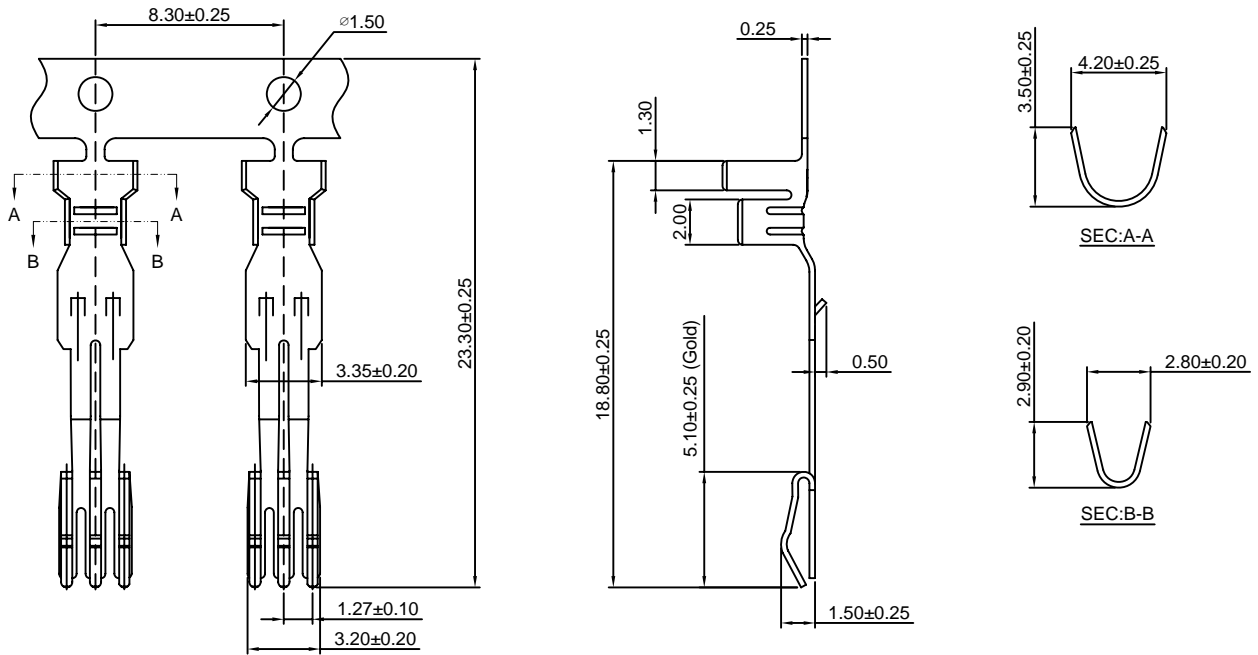

Ordering Information & Dimensions:

Unit: mm

Part NO.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A1271-GP	AWG#18-#20	2.10mm(max)	Phosphor Bronze	Gold over Nickel	5,000 PCS

A1271H-15P


1.27mm pitch Housing

Reference Informations:

*Material:PBT,UL94V-0

*Suitable CJT A1271-T series Terminal

*Color:Black

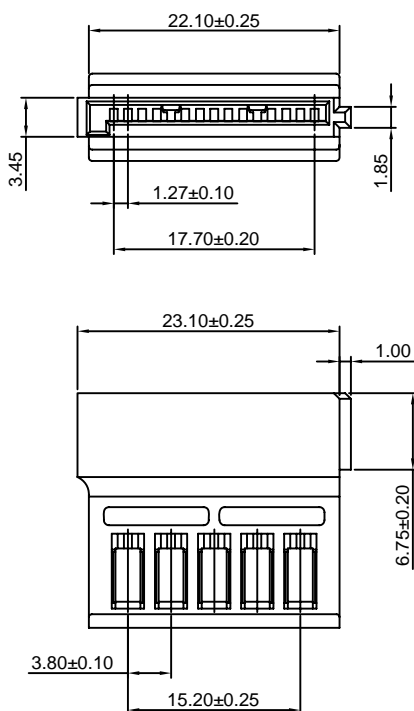

Ordering Information:

A1271H-15P - ***



1 / 2

1.Part No.

2.Material:

(Blank):PBT,UL94V-0

GWT :PBT,UL94V-0 GWT 750℃

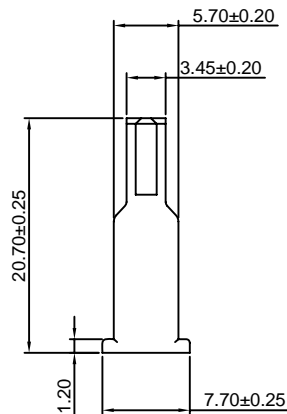


Unit: mm

A1271HC-15P

1.27mm pitch Housing

Reference Informations:

- *Material:PBT,UL94V-0
- *Suitable CJT A1271-T series Terminal
- *Color:Black

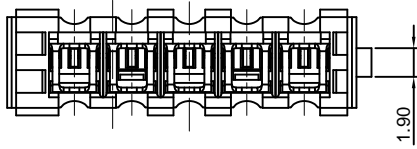

Ordering Information:




A1271HC-15P - ***
1 2

1.Part No.

2.Material:

(Blank):PBT,UL94V-0

GWT:PBT,UL94V-0,GWT 750°C

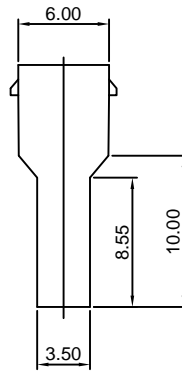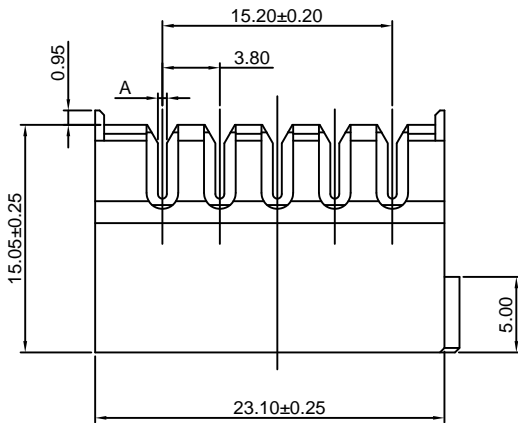

Ordering Information & Dimensions:

PART NO.	Dimensions	WIRE
	A	
15P-18	0.65	18#
15P-20	0.60	20#
15P-22	0.60	22#

Unit: mm