

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2009.05.10
A1	CHANGE THE CURRENT RATING	2018.12.14
A2	CHANGE THE DRAWING	2020.11.11
A3	UPDATED DRAWINGS	2021.03.09
A4	CHANGE THE DRAWING	2022.01.14

Ordering Information:

C3030HMA-2xXP - **
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0,

IEC 60335-1,5th Edition

Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 12.5A AC,DC (MAX)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max





Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0 (Black)

Ordering Information & Dimensions


Part NO.	Dimensions(mm)	
	A	B
C3030HMA-2x1P	---	3.85
C3030HMA-2x2P	3.00	6.85
C3030HMA-2x3P	6.00	9.85
C3030HMA-2x4P	9.00	12.85
C3030HMA-2x5P	12.00	15.85
C3030HMA-2x6P	15.00	18.85
C3030HMA-2x7P	18.00	21.85
C3030HMA-2x8P	21.00	24.85
C3030HMA-2x9P	24.00	27.85
C3030HMA-2x10P	27.00	30.85
C3030HMA-2x11P	30.00	33.85
C3030HMA-2x12P	33.00	36.85

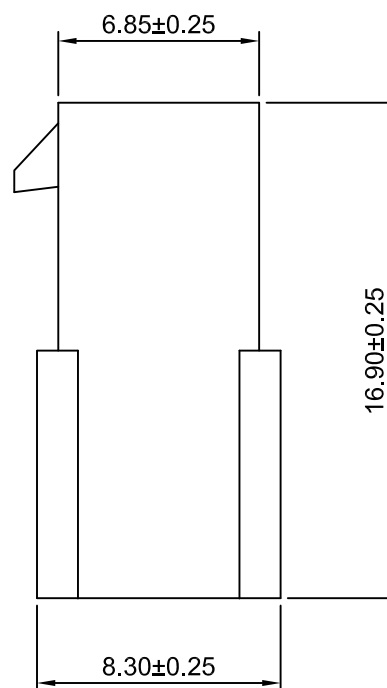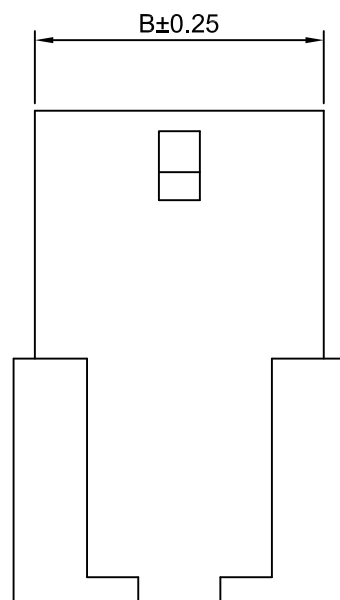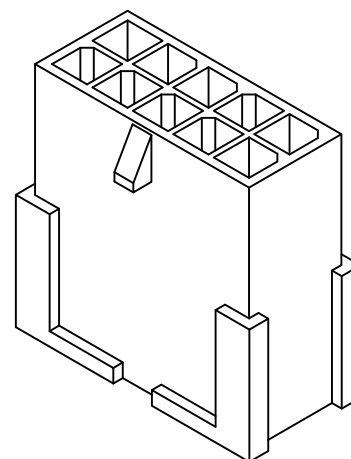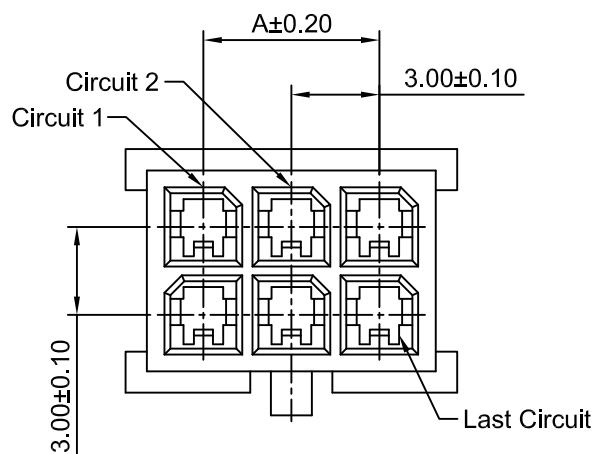

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE
mm	2:1	1 of 2	3.00mm PITCH DUAL ROW HOUSING
DRWN	CHK'D	APPR	
Xu Lei	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			C3030HMA-2xXP
			REV A4

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2009.05.10
A1	CHANGE THE CURRENT RATING	2018.12.14
A2	CHANGE THE DRAWING	2020.11.11
A3	UPDATED DRAWINGS	2021.03.09
A4	CHANGE THE DRAWING	2022.01.14

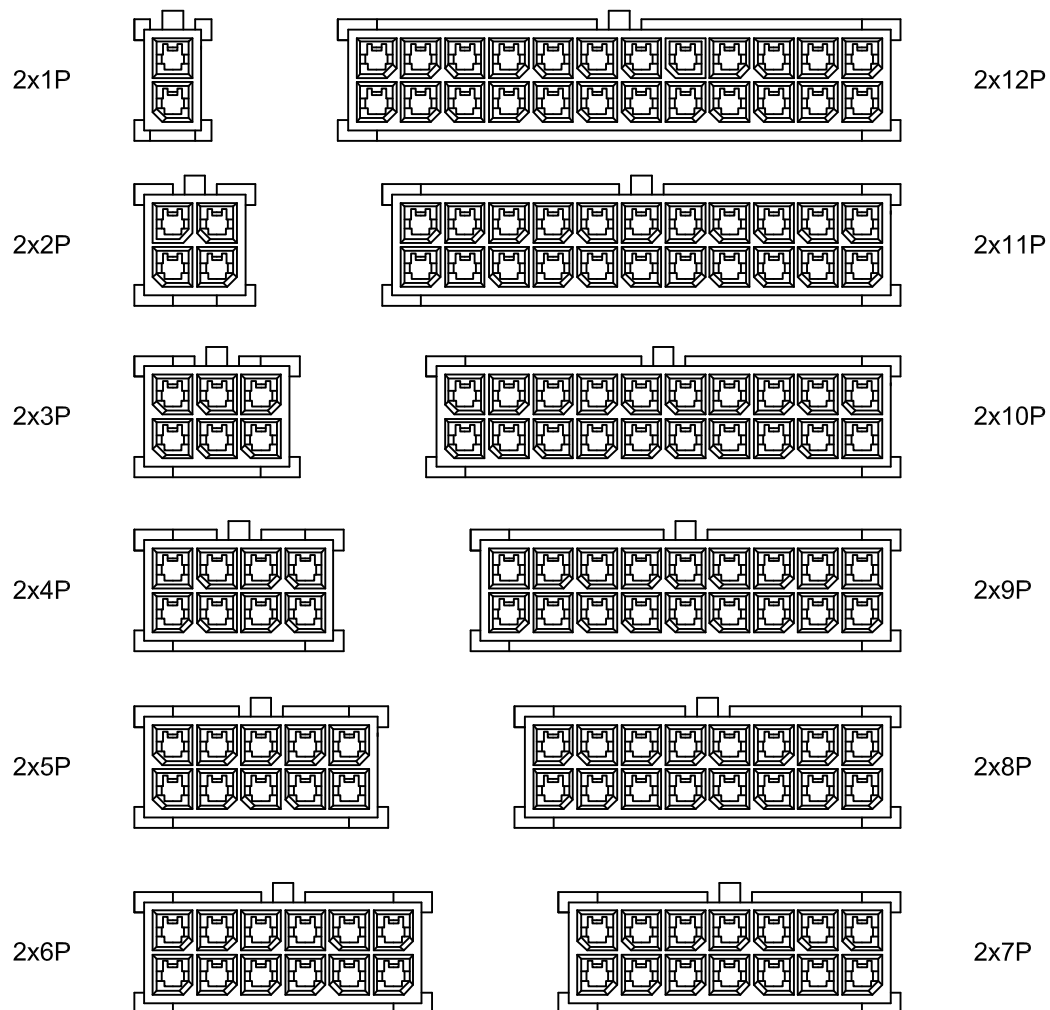

CIRCUIT SIZE LAYOUT(2:1)

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	2:1	2 of 2	3.00mm PITCH DUAL ROW HOUSING	
DRWN	CHK'D	APPR		
Xu Lei	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			C3030HMA-2xXP	A4