

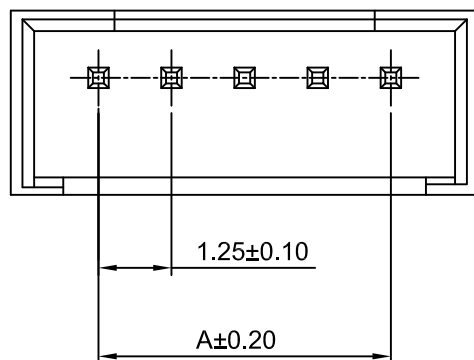
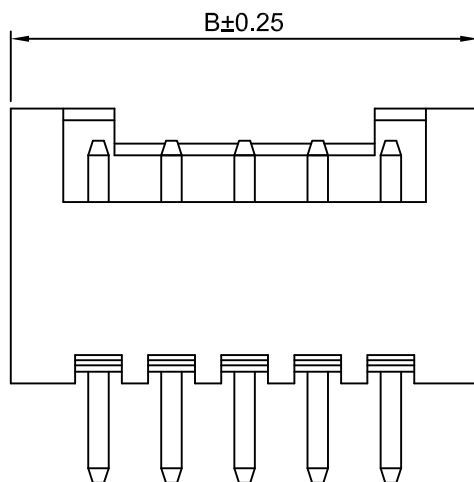



2P

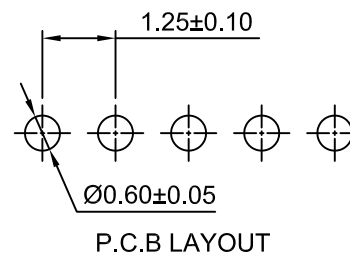

Circuit 1
PIN 0.35 SQ

3P~15P

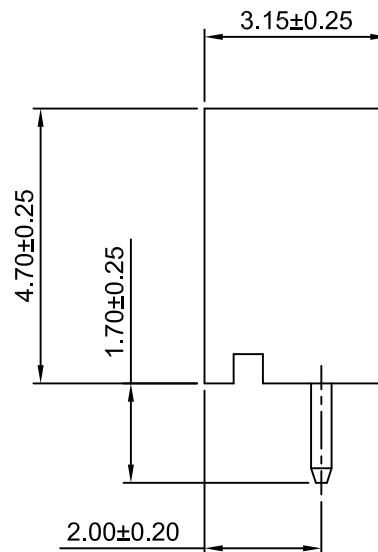

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Reddish brown)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	4.25	9P	10.00	13.00
3P	2.50	5.50	10P	11.25	14.25
4P	3.75	6.75	11P	12.50	15.50
5P	5.00	8.00	12P	13.75	16.75
6P	6.25	9.25	13P	15.00	18.00
7P	7.50	10.50	14P	16.25	19.25
8P	8.75	11.75	15P	17.50	20.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 1.25mm PITCH VERTICAL WAFER
mm		8:1		1 of 1		
DRAWN		CHK'D		APPR		
Chengblao Ye		Diankul Wan		Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION				
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				DRAWING NO.		
				A1253WV-XP		
				REV		
				A1		