
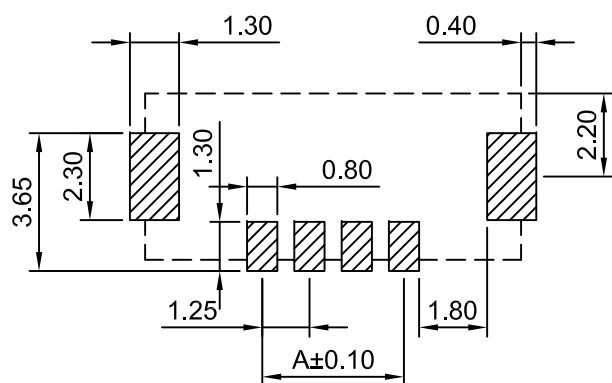
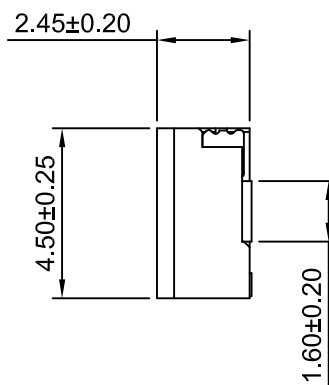
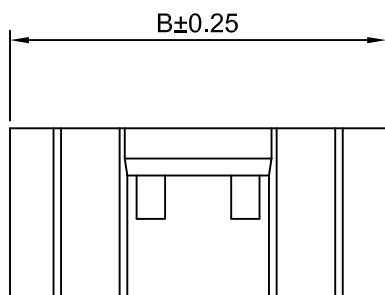


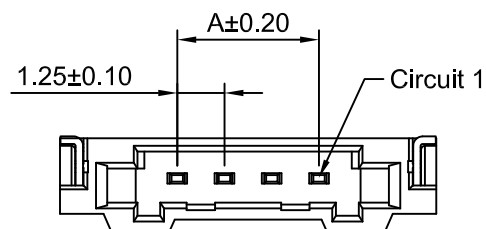

P.C.B. LAYOUT
TOLERANCE:±0.05

Ordering Information:

A1254WRA-S-XP - *** - **
1 2 3

1.Part No.

2.Material:

(blank) - Nylon 6T,UL94V-0

LCP - LCP,UL94V-0

3.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 200V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 900V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Solder Tabs: Phosphor Bronze/Tin over Nickel

Material: Nylon 6T,UL94V-0(Natural)

Ordering Information & Dimensions

Part No.	Dimensions(mm)	
	A	B
A1254WRA-S-2P	1.25	7.45
A1254WRA-S-3P	2.50	8.70
A1254WRA-S-4P	3.75	9.95
A1254WRA-S-5P	5.00	11.20
A1254WRA-S-6P	6.25	12.45
A1254WRA-S-7P	7.50	13.70
A1254WRA-S-8P	8.75	14.95
A1254WRA-S-9P	10.00	16.20
A1254WRA-S-10P	11.25	17.45
A1254WRA-S-11P	12.50	18.70
A1254WRA-S-12P	13.75	19.95

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	Title :	
mm	5:1	1 of 1		
Draw By:		Approved :	1.25mm PITCH	
Diankui Wan		Jack Yin		
General Tolerance			90° WAFER - SMD TYPE	
A2	CHANGE THE DRAW NO.	2020.04.20		
A1	ADD THE INFORMATION	2020.04.20	DRAW NO : A1254WRA-S-XP	
A0	NEW RELEASE	2055.05.10		
REV	DESCRIPTION	DATE		
			REV A2	

A2	CHANGE THE DRAW NO.	2020.04.20	General Tolerance	
A1	ADD THE INFORMATION	2020.04.20	x.x±0.25	PROJECT
A0	NEW RELEASE	2055.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	

