


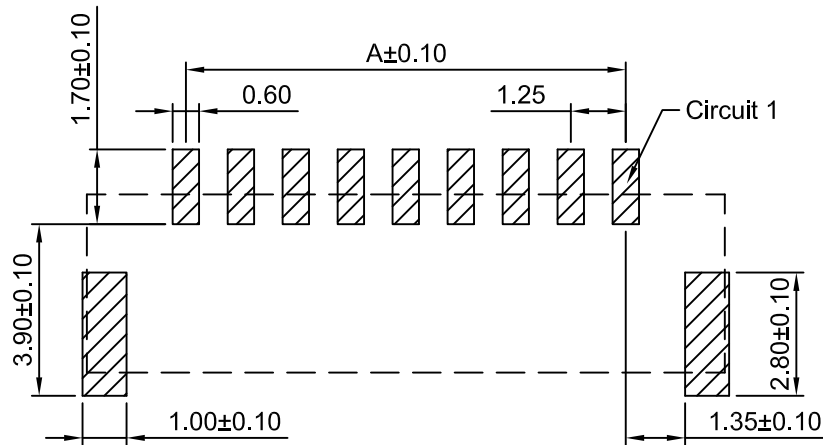
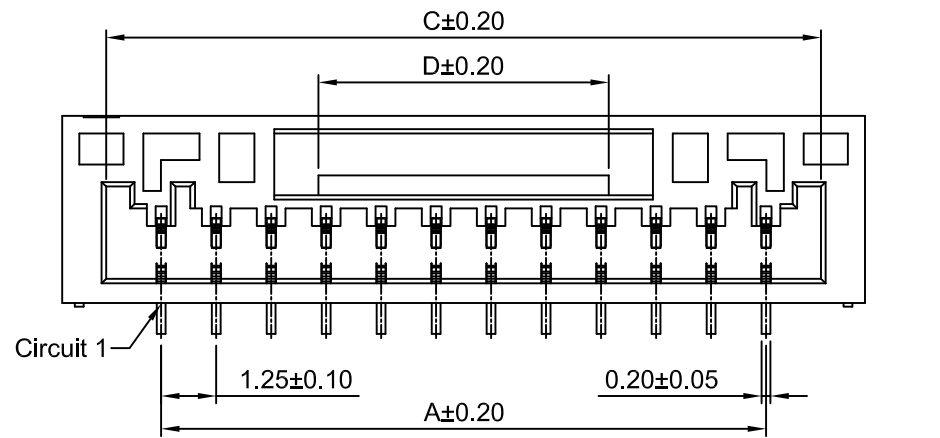





P.C.B LAYOUT
TOLERANCE:±0.05



2P~6P



7P~11P

Ordering Information:

A1257WV-S-XP-6T - ^{**}/₂ - ^{***}/₃

1.Part NO.

2.Color:

IV: Ivory

TR:Tomato Red

LE:Light Blue

3.Pin Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Solder tabs: Phosphor Bronze/Tin over Nickel

Material: Nylon 6T,UL94V-0

Ordering Information & Dimensions

Part No.	Dimensions(mm)			
	A	B	C	D
A1257WV-S-2P-6T	1.25	5.75	3.75	0.75
A1257WV-S-3P-6T	2.50	7.00	5.00	1.60
A1257WV-S-4P-6T	3.75	8.25	6.25	2.65
A1257WV-S-5P-6T	5.00	9.50	7.50	2.50
A1257WV-S-6P-6T	6.25	10.75	8.75	4.65
A1257WV-S-7P-6T	7.50	12.00	10.00	4.65
A1257WV-S-8P-6T	8.75	13.25	11.25	4.65
A1257WV-S-9P-6T	10.00	14.50	12.50	4.65
A1257WV-S-10P-6T	11.25	15.75	13.75	6.60
A1257WV-S-11P-6T	12.50	17.00	15.00	6.60
A1257WV-S-12P-6T	13.75	18.25	16.25	6.60
A1257WV-S-13P-6T	15.00	19.50	17.50	6.60
A1257WV-S-14P-6T	16.25	20.75	18.75	6.60
A1257WV-S-15P-6T	17.50	22.00	20.00	6.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1	1.25mm PITCH	
DRN	CHK	APVD	Vertical SINGLE ROW WAFER	
Haisen Li	DianKui Wan	Jack Yin	- SMD TYPE	
General Tolerance			DRAWING NO	REV
A1	CHANGE THE DRAWING	2021.11.22	A1257WV-S-XP-6T	A1
A0	NEW RELEASE	2021.10.27		
REV	DESCRIPTION	DATE		

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

