
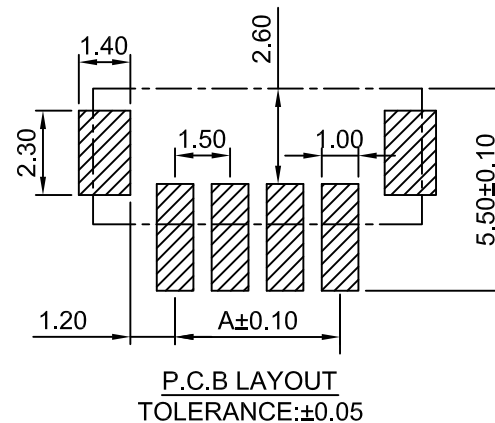
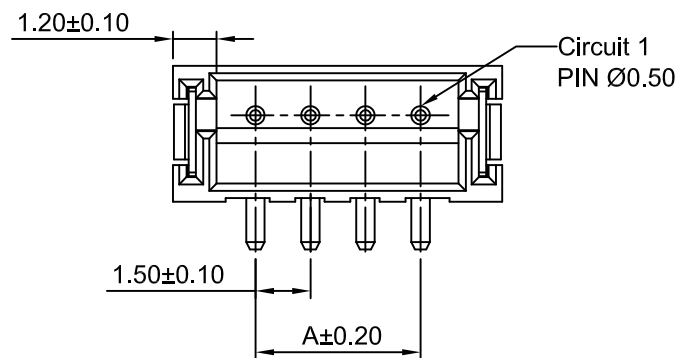


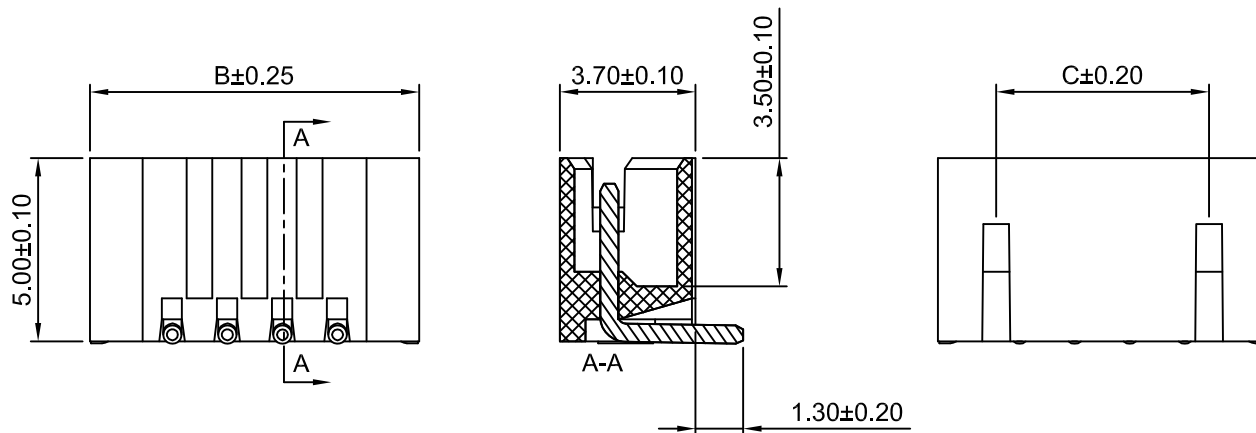

#### SPECIFICATIONS:

Current Rating: 1A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -40°C ~ +105°C  
Contact Resistance: 30mΩ Max.  
Insulation Resistance: 1000MΩ Min.  
Withstanding Voltage: 1000V AC/minute  
Pin Material: Brass/Tin over Nickel  
Solder Tabs: Phosphor Bronze/Tin over Nickel  
Wafer: Nylon9T, UL94V-0(Ivory)

#### Ordering Information & Dimensions

| Part NO.      | Dimensions(mm) |       |       |
|---------------|----------------|-------|-------|
|               | A              | B     | C     |
| A1501WV-S-2P  | 1.50           | 6.00  | ---   |
| A1501WV-S-3P  | 3.00           | 7.50  | 4.30  |
| A1501WV-S-4P  | 4.50           | 9.00  | 5.80  |
| A1501WV-S-5P  | 6.00           | 10.50 | 7.30  |
| A1501WV-S-6P  | 7.50           | 12.00 | 8.80  |
| A1501WV-S-7P  | 9.00           | 13.50 | 10.30 |
| A1501WV-S-8P  | 10.50          | 15.00 | 11.80 |
| A1501WV-S-9P  | 12.00          | 16.50 | 13.30 |
| A1501WV-S-10P | 13.50          | 18.00 | 14.80 |
| A1501WV-S-11P | 15.00          | 19.50 | 16.30 |
| A1501WV-S-12P | 16.50          | 21.00 | 17.80 |
| A1501WV-S-13P | 18.00          | 22.50 | 19.30 |

| CJTconn CHANGJIANG CONNECTORS CO.,LTD.               |             |                                                                                       |                     |
|------------------------------------------------------|-------------|---------------------------------------------------------------------------------------|---------------------|
| Unit                                                 | Scale       | Sheet                                                                                 | TITLE               |
| mm                                                   | 5:1         | 1 of 1                                                                                | 1.50mm PITCH        |
| DRAWN                                                | CHKD        | APPR                                                                                  |                     |
| Haisen Li                                            | Diankui Wan | Jack Yin                                                                              | 180° WAFER-SMT TYPE |
| General Tolerances                                   |             | THIRD ANGLE PROJECTION                                                                |                     |
| x.xx±0.25<br>x.xxx±0.20<br>x.xxxx±0.15<br>ANGLES ±1° |             |  | DRAWING NO.         |
|                                                      |             |                                                                                       | A1501WV-S-XP-9T     |
|                                                      |             |                                                                                       | REV<br>A0           |

| REV | DESCRIPTION | DATE       |
|-----|-------------|------------|
| A0  | NEW RELEASE | 2014.07.21 |