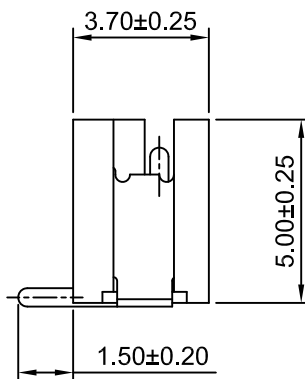
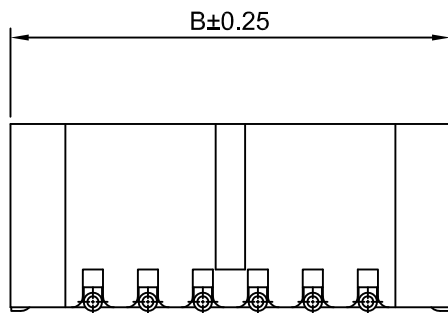
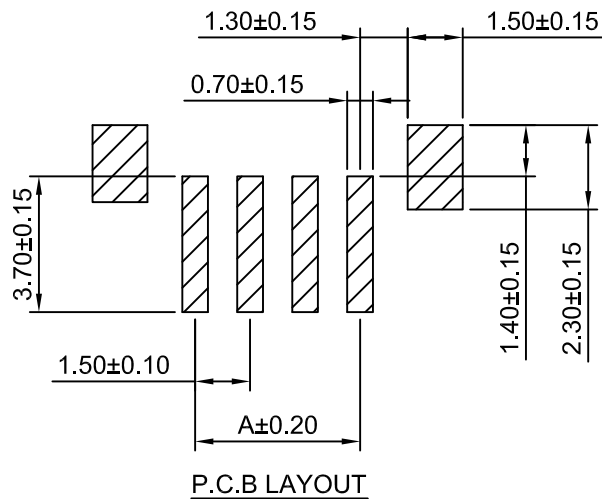
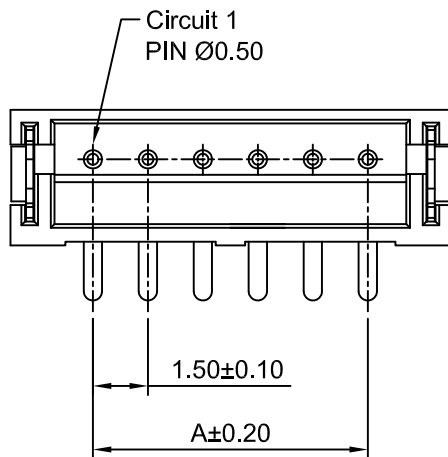


SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)
 Voltage Rating: 100V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Tin over Nickel
 Solder Tabs: Phosphor Bronze/Tin over Nickel
 Wafer: Nylon 6T,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	6.00	10P	13.50	18.00
3P	3.00	7.50	11P	15.00	19.50
4P	4.50	9.00	12P	16.50	21.00
5P	6.00	10.50	13P	18.00	22.50
6P	7.50	12.00	14P	19.50	24.00
7P	9.00	13.50	15P	21.00	25.50
8P	10.50	15.00	16P	22.50	27.00
9P	12.00	16.50			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	5:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yln

Title :
 1.50mm PITCH
 180° WAFER-SMT TYPE

A1	CHANGE THE Current Rating	2019.02.18
A0	NEW RELEASE	2014.01.17
REV	DESCRIPTION	DATE

General Tolerance	
x.xx±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

DRAW NO : A1501WV-S-XP

REV
A1