


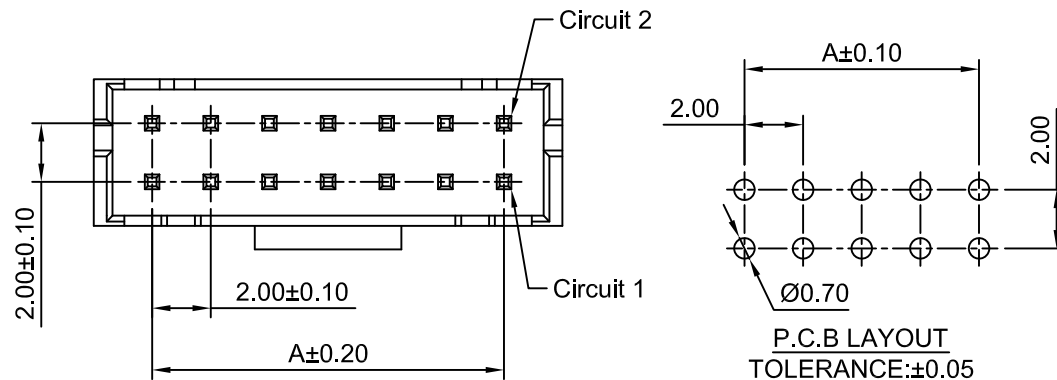



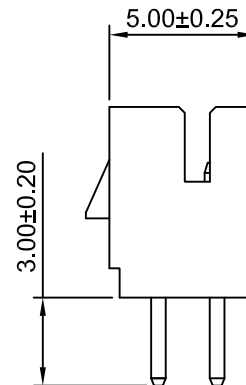


2x5P~2x25P

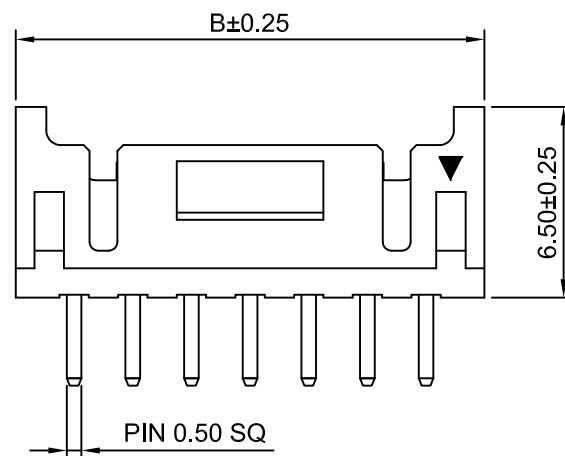

2x2P



2x3P



2x4P

## Ordering Information:

A2006WVB-2xXP - \*\*\* - \*\*\*  
1 2 3

1.Part No.

2.Material:


(blank) - Nylon 66,UL94V-0

GWT - Nylon 66,UL94V-0,GWT 750°C

3.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel



## SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

## Ordering Information & Dimensions

| Circuits | Dimensions(mm) |       | Circuits | Dimensions(mm) |       |
|----------|----------------|-------|----------|----------------|-------|
|          | A              | B     |          | A              | B     |
| 2x2P     | 2.00           | 6.00  | 2x14P    | 26.00          | 30.00 |
| 2x3P     | 4.00           | 8.00  | 2x15P    | 28.00          | 32.00 |
| 2x4P     | 6.00           | 10.00 | 2x16P    | 30.00          | 34.00 |
| 2x5P     | 8.00           | 12.00 | 2x17P    | 32.00          | 36.00 |
| 2x6P     | 10.00          | 14.00 | 2x18P    | 34.00          | 38.00 |
| 2x7P     | 12.00          | 16.00 | 2x19P    | 36.00          | 40.00 |
| 2x8P     | 14.00          | 18.00 | 2x20P    | 38.00          | 42.00 |
| 2x9P     | 16.00          | 20.00 | 2x21P    | 40.00          | 44.00 |
| 2x10P    | 18.00          | 22.00 | 2x22P    | 42.00          | 46.00 |
| 2x11P    | 20.00          | 24.00 | 2x23P    | 44.00          | 48.00 |
| 2x12P    | 22.00          | 26.00 | 2x24P    | 46.00          | 50.00 |
| 2x13P    | 24.00          | 28.00 | 2x25P    | 48.00          | 52.00 |

**CJTconn**

CHANGJIANG CONNECTORS CO.,LTD.

|                    |  |  |             |  |  |                                                                                       |  |  |                     |  |  |
|--------------------|--|--|-------------|--|--|---------------------------------------------------------------------------------------|--|--|---------------------|--|--|
| Unit               |  |  | Scale       |  |  | Sheet                                                                                 |  |  | TITLE               |  |  |
| mm                 |  |  | 4:1         |  |  | 1 of 1                                                                                |  |  | 2.00mm PITCH        |  |  |
| DRAWN              |  |  | CHK'D       |  |  | APPR                                                                                  |  |  | 180° DUAL ROW WAFER |  |  |
| Haisen Li          |  |  | Djankui Wan |  |  | Jack Yin                                                                              |  |  | DRAWING NO.         |  |  |
| General Tolerances |  |  |             |  |  | THIRD ANGLE PROJECTION                                                                |  |  |                     |  |  |
| x,xx±0.25          |  |  |             |  |  |  |  |  |                     |  |  |
| x,xxx±0.20         |  |  |             |  |  |                                                                                       |  |  |                     |  |  |
| x,xxxx±0.15        |  |  |             |  |  |                                                                                       |  |  |                     |  |  |
| ANGLES ±1°         |  |  |             |  |  | A2006WVB-2xXP                                                                         |  |  |                     |  |  |
| 0                  |  |  | NEW RELEASE |  |  | 2012.05.10                                                                            |  |  | REV                 |  |  |
| REV                |  |  | DESCRIPTION |  |  | DATE                                                                                  |  |  | A0                  |  |  |