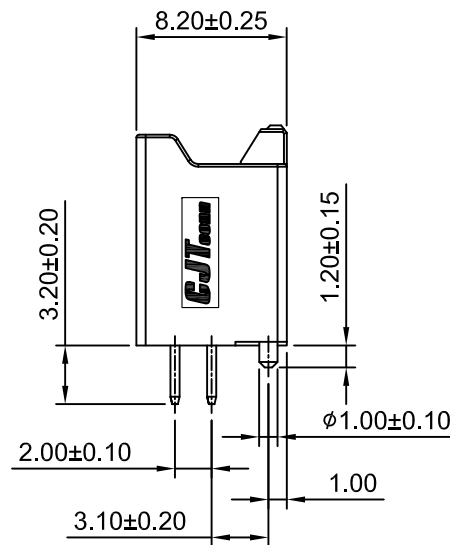
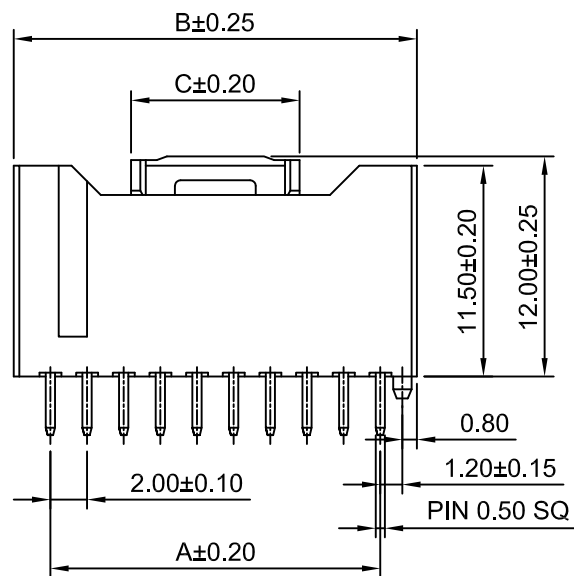
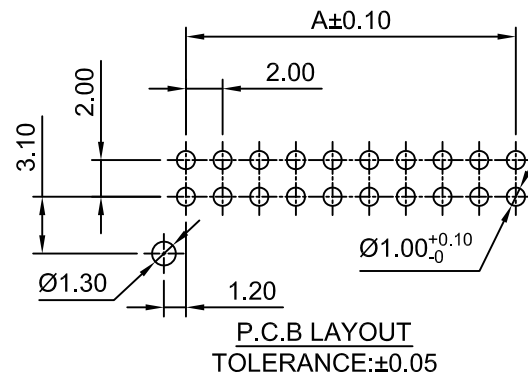
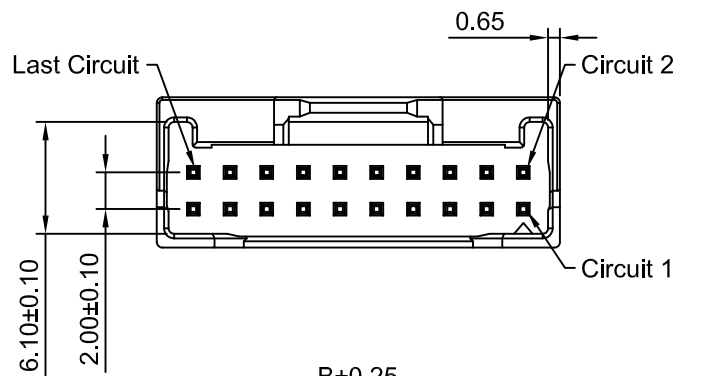


Ordering Information:

A2006WVD-F-2xXP - ***

1 2

1.Part No.

2.Color:

(blank) - Natural

BK - Black

RD - Red

BL - Blue


YL - Yellow

GN - Green

OR - Orange

BR - Brown

PK - Pink



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 9T+30%GF,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x5P	8.00	12.00	7.30	2x13P	24.00	28.00	9.20
2x6P	10.00	14.00	9.20	2x14P	26.00	30.00	9.20
2x7P	12.00	16.00	9.20	2x15P	28.00	32.00	9.20
2x8P	14.00	18.00	9.20	2x16P	30.00	34.00	9.20
2x9P	16.00	20.00	9.20	2x17P	32.00	36.00	9.20
2x10P	18.00	22.00	9.20	2x18P	34.00	38.00	9.20
2x11P	20.00	24.00	9.20	2x19P	36.00	40.00	9.20
2x12P	22.00	26.00	9.20	2x20P	38.00	42.00	9.20

CJTconn CHANGJIANG CONNECTORS CO.,LTD.				
Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1	2.00mm Pitch 180° Dual Row Wafer	
DRWN	CHK'D	APPR		
Chengbiao Ye	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION		
x.x±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO. A2006WVD-F-2xXP	REV A4

A4	CHANGE THE DRAWING	2023.05.15
A3	ADD THE INFORMATION	2021.07.15
A2	CHANGE THE SIZE	2020.04.17
A1	ADD THE INFORMATION	2019.05.13
A0	NEW RELEASE	2019.04.29
REV	DESCRIPTION	DATE