
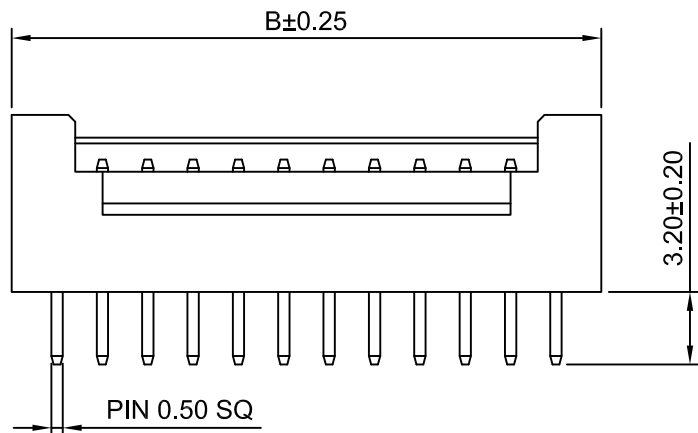
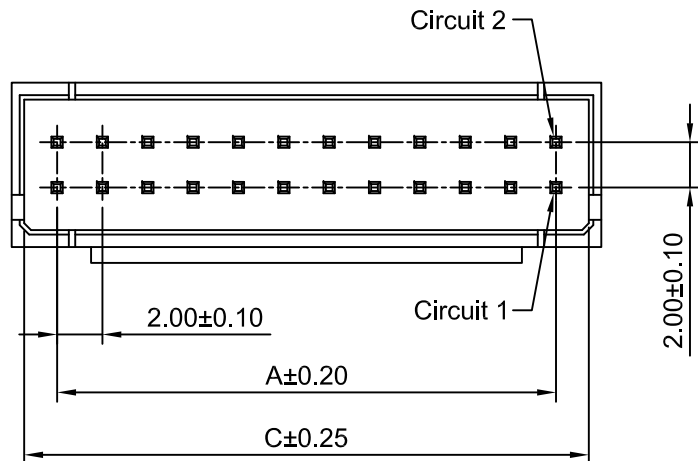
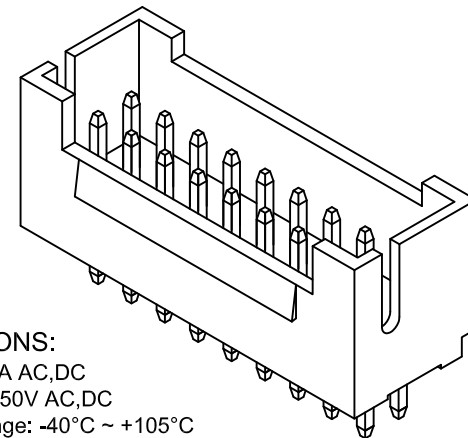


P.C.B LAYOUT

Ordering Information:

A2008WV-2xXP-46 - ** - ***

- 1.Part No.
- 2.Color:
(Blank):Ivory
BK:Black
RD:Red
YL:Yellow
BL:Blue
GN:Green
GY:Gray
- 3.Finish:
(blank):Tin over Nickel
G:Gold over Nickel(Au 1u")
G3:Gold over Nickel(Au 3u")

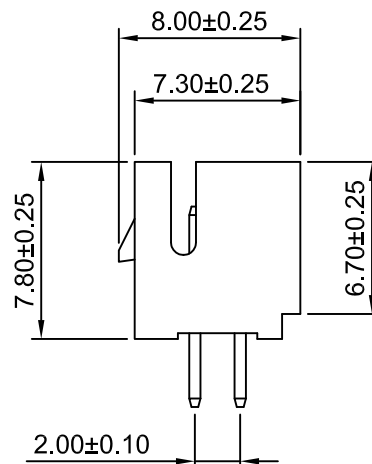

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 46,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x2P	2.00	6.00	4.80	2x12P	22.00	26.00	24.80
2x3P	4.00	8.00	6.80	2x13P	24.00	28.00	26.80
2x4P	6.00	10.00	8.80	2x14P	26.00	30.00	28.80
2x5P	8.00	12.00	10.80	2x15P	28.00	32.00	30.80
2x6P	10.00	14.00	12.80	2x16P	30.00	34.00	32.80
2x7P	12.00	16.00	14.80	2x17P	32.00	36.00	34.80
2x8P	14.00	18.00	16.80	2x18P	34.00	38.00	36.80
2x9P	16.00	20.00	18.80	2x19P	36.00	40.00	38.80
2x10P	18.00	22.00	20.80	2x20P	38.00	42.00	40.80
2x11P	20.00	24.00	22.80				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	Title :	
mm	3:1	1 of 1		
Draw By:		Approved :	2.00mm Pitch	
Diankui Wan		Jack Yin		
General Tolerance			180° Dual Row Wafer	
A1	CHANGE THE MATERIAL	2019.09.07		
A0	NEW RELEASE	2019.01.17	DRAW NO : A2008WV-2xXP-46	
REV	DESCRIPTION	DATE		
			REV A1	