




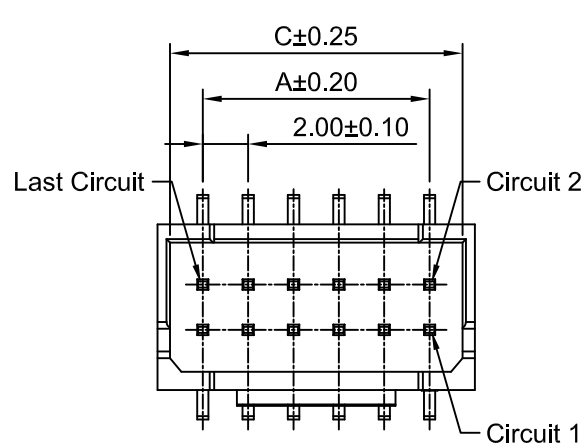

2x5P~2x22P

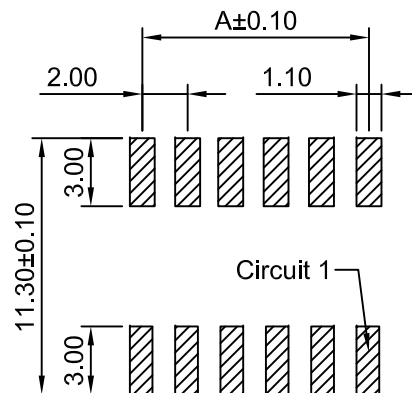

P.C.B LAYOUT
TOLERANCE:±0.05






SPECIFICATIONS:


Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP,UL94V-0(Ivory)

Ordering Information & Dimensions


Part NO.	Dimensions(mm)		
	A	B	C
A2008WV-S-2x2P-LCP	2.00	6.00	4.90
A2008WV-S-2x3P-LCP	4.00	8.00	6.90
A2008WV-S-2x4P-LCP	6.00	10.00	8.90
A2008WV-S-2x5P-LCP	8.00	12.00	10.90
A2008WV-S-2x6P-LCP	10.00	14.00	12.90
A2008WV-S-2x7P-LCP	12.00	16.00	14.90
A2008WV-S-2x8P-LCP	14.00	18.00	16.90
A2008WV-S-2x9P-LCP	16.00	20.00	18.90
A2008WV-S-2x10P-LCP	18.00	22.00	20.90
A2008WV-S-2x11P-LCP	20.00	24.00	22.90
A2008WV-S-2x12P-LCP	22.00	26.00	24.90
A2008WV-S-2x13P-LCP	24.00	28.00	26.90
A2008WV-S-2x14P-LCP	26.00	30.00	28.90
A2008WV-S-2x15P-LCP	28.00	32.00	30.90
A2008WV-S-2x16P-LCP	30.00	34.00	32.90
A2008WV-S-2x18P-LCP	34.00	38.00	36.90
A2008WV-S-2x20P-LCP	38.00	42.00	40.90
A2008WV-S-2x22P-LCP	42.00	46.00	44.90

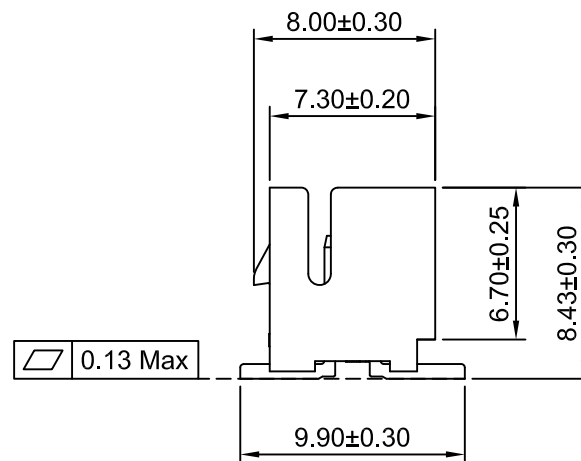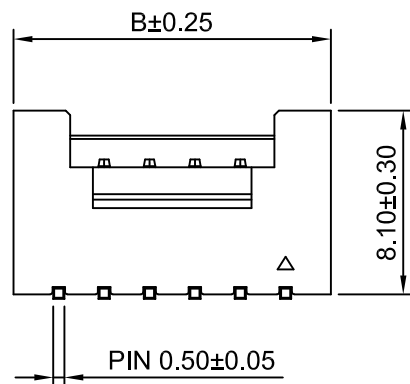

2x2P



2x3P



2x4P

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale			Sheet			TITLE					
mm			3:1			1 of 1								
DRWN			CHK'D			APPR			2.00mm PITCH VERTICAL DUAL ROW WAFER - SMD TYPE					
Dengchun Yi			Diankui Wan			Jack Yin								
General Tolerances						THIRD ANGLE PROJECTION			DRAWING NO			REV		
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°														
												A2008WV-S-2xXP-LCP		

A1	MODIFY DRAWING	2019.12.23
A0	NEW RELEASE	2013.12.21
REV	DESCRIPTION	DATE