

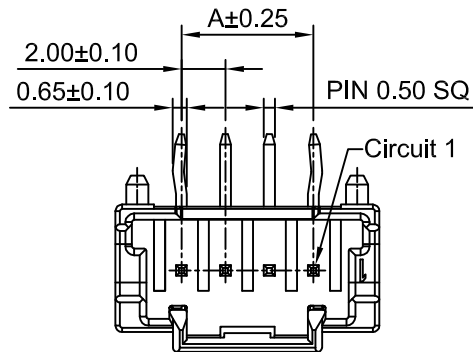
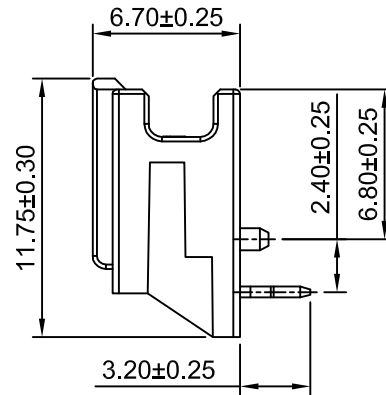




P.C.B LAYOUT
TOLERANCE: ±0.05

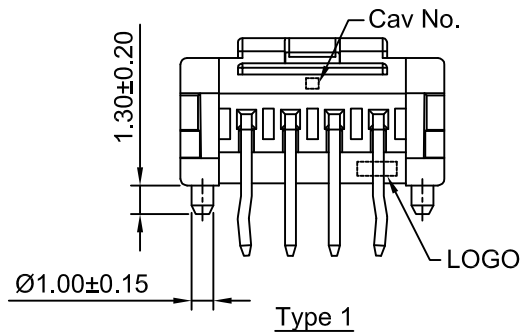

3P~15P

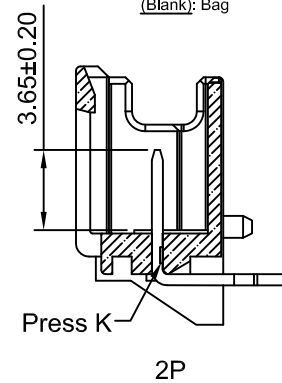

Type 1



Type 2

Ordering Information:

A2011WRA-F-XP - *** - ** - ** - ** - **
1 2 3 4 5 6

1.Part NO.

2.Style:

(Blank): TYPE 1

2: TYPE 2

3.Material:

(Blank): PBT+15%GF,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

4.Color:

(Blank): see section 3 materia

BK: Black

YL: Yellow

RD: Red

BL: Blue

PK: Pink

GN: Green

BR: Brown

OR: Orange

VI: Violet

GY: Gray

PBL: Pale Blue

YGN: Yellowish Green

FOR: Fluorescent Orange

YGN: Yellowish Green

5.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

6.Packing:

(Blank): Bag

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2011WRA-F-2P	2.00	8.00
A2011WRA-F-3P	4.00	10.00
A2011WRA-F-4P	6.00	12.00
A2011WRA-F-5P	8.00	14.00
A2011WRA-F-6P	10.00	16.00
A2011WRA-F-7P	12.00	18.00
A2011WRA-F-8P	14.00	20.00
A2011WRA-F-9P	16.00	22.00
A2011WRA-F-10P	18.00	24.00
A2011WRA-F-11P	20.00	26.00
A2011WRA-F-12P	22.00	28.00
A2011WRA-F-13P	24.00	30.00
A2011WRA-F-14P	26.00	32.00
A2011WRA-F-15P	28.00	34.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.00mm PITCH RIGHT-ANGLE WAFER	
DRAWN	CHK'D	APPR		
Jianying Zhu	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			THIRD ANGLE PROJECTION	
A1	CHANGE THE DRAWING	2024.02.26	A2011WRA-F-XP	
A0	NEW RELEASE	2023.12.14		
REV	DESCRIPTION	DATE	REV A1	