
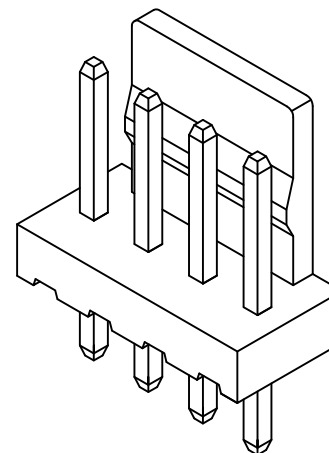
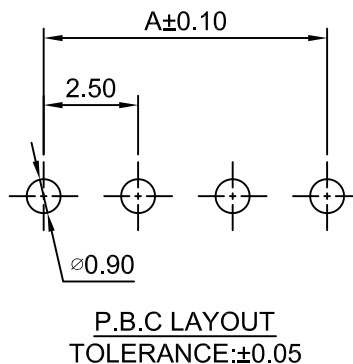


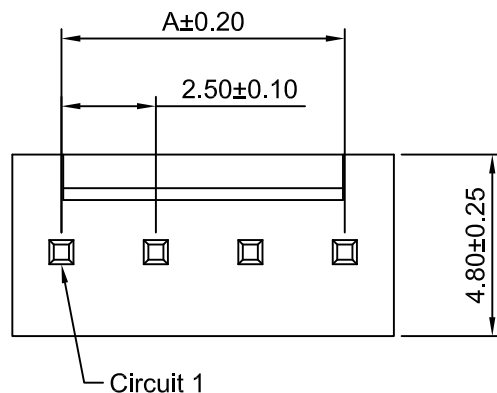

Ordering Information:

A2503WV-XP - **
1 2



- Part No.
- Color:
(blank): Ivory
WH: White

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
PIN Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part No.	Dimensions(mm)	
	A	B
A2503WV- 2P	2.50	5.00
A2503WV- 3P	5.00	7.50
A2503WV- 4P	7.50	10.00
A2503WV- 5P	10.00	12.50
A2503WV- 6P	12.50	15.00
A2503WV- 7P	15.00	17.50
A2503WV- 8P	17.50	20.00
A2503WV- 9P	20.00	22.50
A2503WV- 10P	22.50	25.00
A2503WV- 11P	25.00	27.50
A2503WV- 12P	27.50	30.00
A2503WV- 13P	30.00	32.50
A2503WV- 14P	32.50	35.00
A2503WV- 15P	35.00	37.50
A2503WV- 16P	37.50	40.00
A2503WV- 17P	40.00	42.50
A2503WV- 18P	42.50	45.00
A2503WV- 19P	45.00	47.50
A2503WV- 20P	47.50	50.00

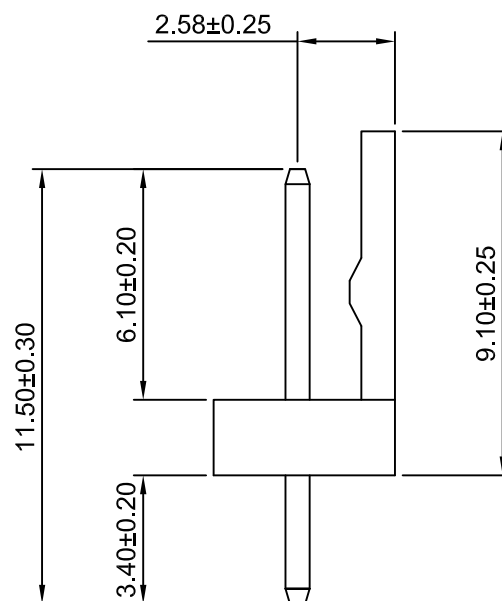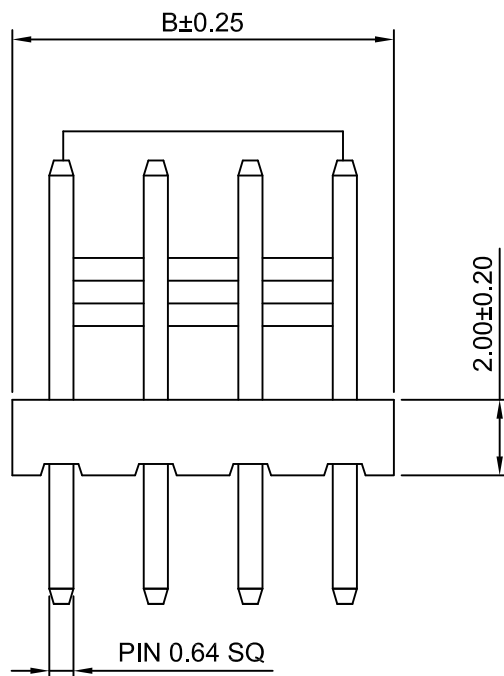

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.50mm PITCH 180° SINGLE ROW DIP WAFER	
mm	5:1	1 of 1		
DRN	CHK	APVD		
Dengchun Yi	DianKui Wan	Jack Yin		
General Tolerance		THIRD ANGLE PROJECTION	DRAWING NO A2503WV-XP	REV A0
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°				
				

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2009.05.10