


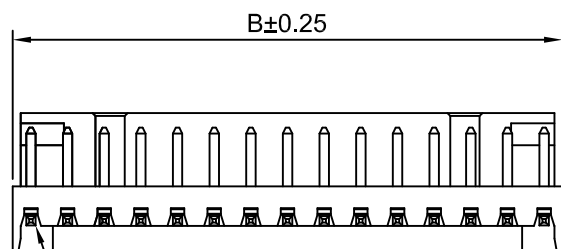

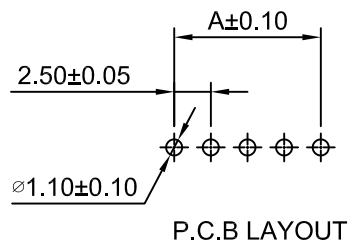
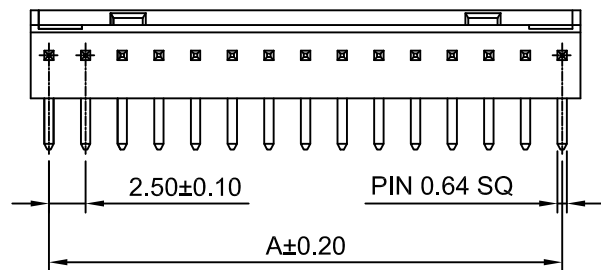






Circuit 1

7P~15P



2P~3P

4P~6P

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Brown)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	5.00	9P	20.00	22.50
3P	5.00	7.50	10P	22.50	25.00
4P	7.50	10.00	11P	25.00	27.50
5P	10.00	12.50	12P	27.50	30.00
6P	12.50	15.00	13P	30.00	32.50
7P	15.00	17.50	14P	32.50	35.00
8P	17.50	20.00	15P	35.00	37.50

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.		
Unit	Scale	Sheet	Title : 2.50mm PITCH 90° WAFER		
mm	2:1	1 of 1			
Draw By: Diankui Wan		Approved : Jack Yin		90° WAFER	
General Tolerance					
x.xx±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 			
			DRAW NO : A2507WR-XP		REV A1

A1	CHANGE THE SIZE	2019.12.17	x.x±0.25	PROJECT ⊕ ⊖
A0	NEW RELEASE	2005.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	