



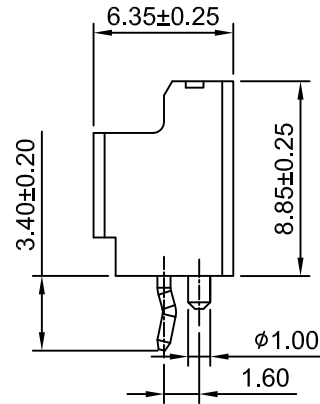
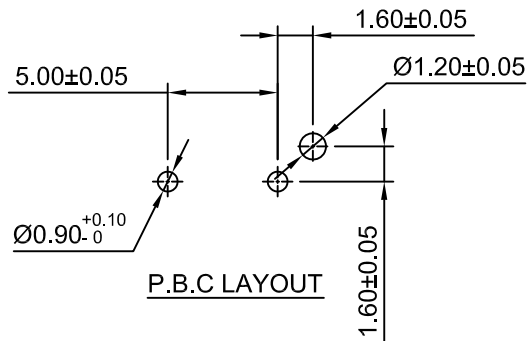
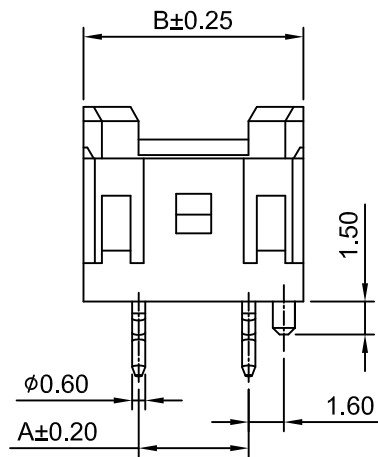



Unit	Scale	Sheet	TITLE 2.50mm Pitch 180° Wafer DRAWING NO. A2508WV-F-XP-A		REV A1
mm	3:1	1 of 1			
DRAWN	CHK'D	APPR			
Haisen Li	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x,x±0.25 x,x.x±0.20 x,x.xxx±0.15 ANGLES ±1°					

EvenCircuit
empty

Circuit 1



3P



5P-15P

Ordering Information:

A2508WV-F-XP-A - *** - *** - ***
1 2 3 4

1.Part No.

2.Material:

(blank) - Nylon 66,UL94V-0

GWT - Nylon 66,UL94V-0,GWT 750℃

3.Color:

(blank):Ivory

RD:Red OR:Orange

YL:Yellow GY:Gray

BL:Blue PK:Pink

BK:Black BR:Brown

GN:Green VI:Violet

WH:White LY:Lemon yellow

LE:Light Blue FY:Fluorescent yellow

4.Finish:

(blank):Tin over Nickel

G:Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40℃ ~ +105℃

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material:Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	5.00	10.00	11P	25.00	30.00
5P	10.00	15.00	13P	30.00	35.00
7P	15.00	20.00	15P	35.00	40.00
9P	20.00	25.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	2.50mm Pitch		
DRAWN	CHK'D	APPR	180° Wafer		
Haisen Li	Djankui Wan	Jack Yin	DRAWING NO.		
General Tolerances			THIRD ANGLE PROJECTION		
A1	CHANGE THE DRAWING	2019.12.24	A2508WV-F-XP-A		
A0	NEW RELEASE	2019.12.24			
REV	DESCRIPTION	DATE			
			REV A1		