

Odering Information:

A2547FD-2xXP - *
1 2

1.Part No.

2.Color:

(blank) - Black

GY - Gray

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance: 1000MΩ Min


Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	Circuits	Dimensions(mm)
	B		B
2x3P	12.42	2x18P	50.52
2x4P	14.96	2x19P	53.06
2x5P	17.50	2x20P	55.60
2x6P	20.04	2x21P	58.14
2x7P	22.58	2x22P	60.68
2x8P	25.12	2x23P	63.22
2x9P	27.66	2x24P	65.76
2x10P	30.20	2x25P	68.30
2x11P	32.74	2x26P	70.84
2x12P	35.28	2x27P	73.38
2x13P	37.82	2x28P	75.92
2x14P	40.36	2x29P	78.46
2x15P	42.90	2x30P	81.00
2x16P	45.44	2x31P	83.54
2x17P	47.98	2x32P	86.08

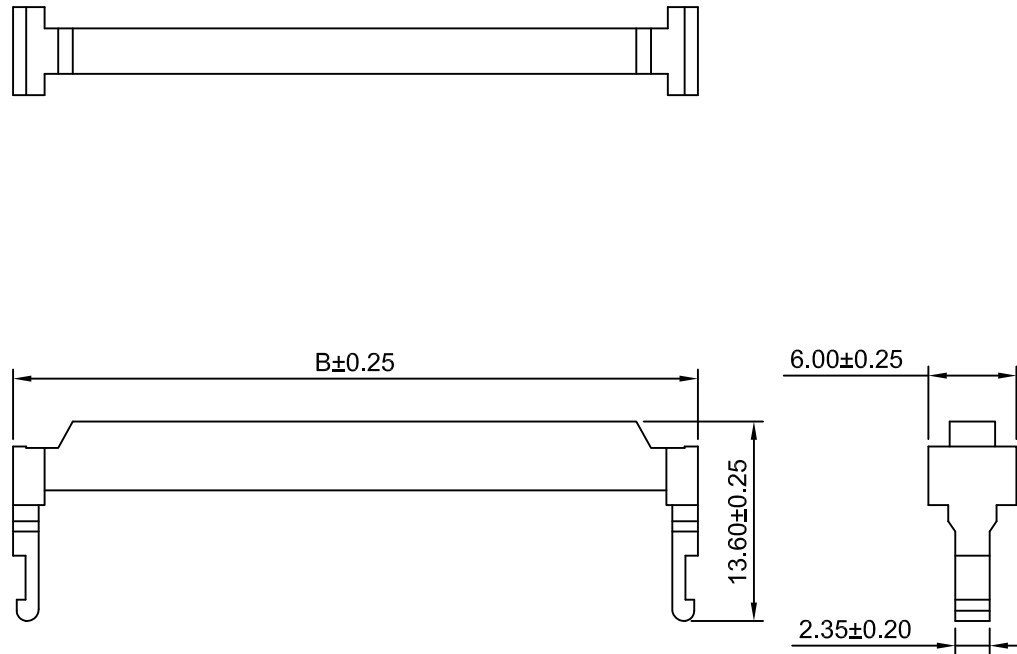

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 2.54mm Pitch IDC Socket	
mm		2:1		1 of 1			
Draw By:		Approved :					
Dlankul Wan		Jack YIn					
		General Tolerance					
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 		DRAW NO : A2547FD-2xXP			
REV		DESCRIPTION		DATE		REV A0	

