


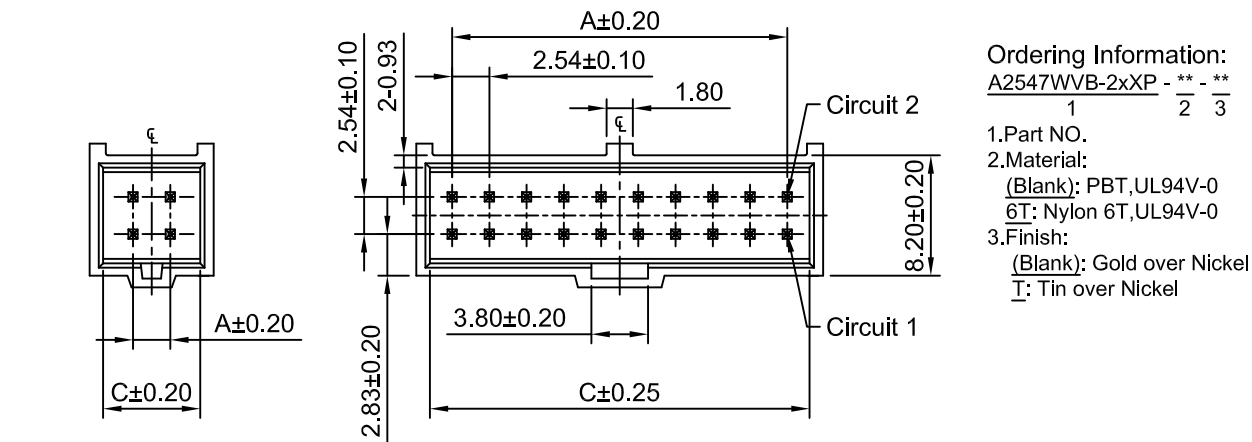

Ordering Information:
A2547WVB-2xXP - ** - **
1 2 3



- Part NO.
- Material:
(Blank): PBT,UL94V-0
6T: Nylon 6T,UL94V-0
- Finish:
(Blank): Gold over Nickel
T: Tin over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: PBT,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x2P	2.54	8.46	5.58	2x19P	45.72	50.60	48.76
2x3P	5.08	10.00	8.12	2x20P	48.26	53.14	51.30
2x4P	7.62	12.50	10.66	2x21P	50.80	55.68	53.84
2x5P	10.16	15.04	13.20	2x22P	53.34	58.22	56.38
2x6P	12.70	17.58	15.74	2x23P	55.88	60.76	58.92
2x7P	15.24	20.12	18.28	2x24P	58.42	63.30	61.46
2x8P	17.78	22.66	20.82	2x25P	60.96	65.84	64.00
2x9P	20.32	25.20	23.36	2x26P	63.50	68.38	66.54
2x10P	22.86	27.74	25.90	2x27P	66.04	70.92	69.08
2x11P	25.40	30.28	28.44	2x28P	68.58	73.46	71.62
2x12P	27.94	32.82	30.98	2x29P	71.12	76.00	74.16
2x13P	30.48	35.36	33.52	2x30P	73.66	78.54	76.70
2x14P	33.02	37.90	36.06	2x31P	76.20	81.08	79.24
2x15P	35.56	40.44	38.60	2x32P	78.74	83.62	81.78
2x16P	38.10	42.98	41.14	2x33P	81.28	86.16	84.32
2x17P	40.64	45.52	43.68	2x34P	83.82	88.70	86.86
2x18P	43.18	48.06	46.22				

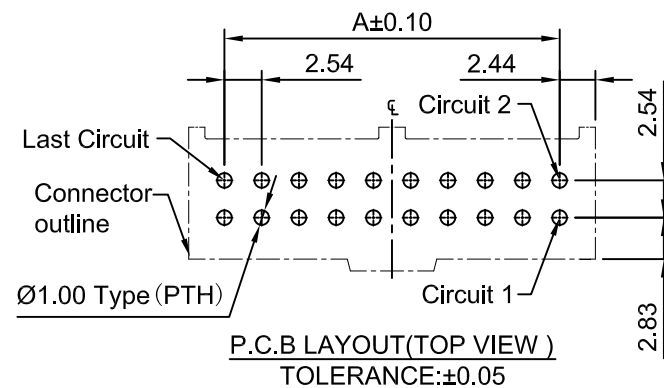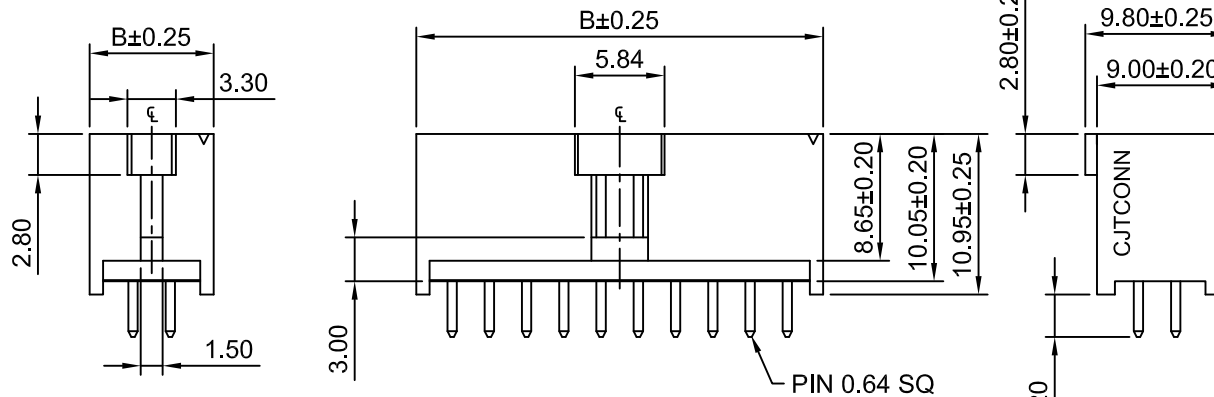

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

A6	CHANGE THE DRAWING	2021.09.11	Unit	Scale	Sheet	TITLE 2.54mm PITCH 180° BOX HEADER		
A5	CHANGE THE DRAWING	2021.04.09	mm	2:1	1 of 1			
A4	CHANGE THE DRAWING	2020.07.17	DRWN	CHK'D	APPR			
A3	CHANGE THE SIZE OF HOUSING	2019.06.12	Haisen Li	Diankui Wan	Jack Yin			
A2	CHANGE THE SIZE B	2019.02.26	General Tolerances		THIRD ANGLE PROJECTION			
A1	ADD THE INFORMATION	2019.01.04	x,xx±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°			DRAWING NO.		REV A6
A0	NEW RELEASE	2011.05.13				A2547WVB-2xXP		
REV	DESCRIPTION	DATE						