
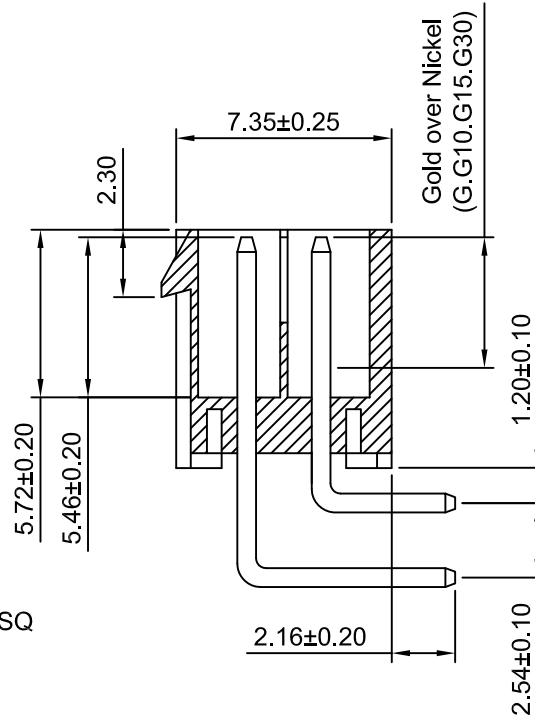
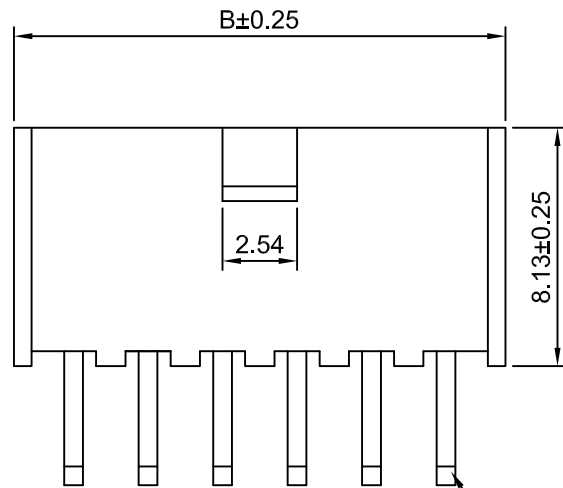
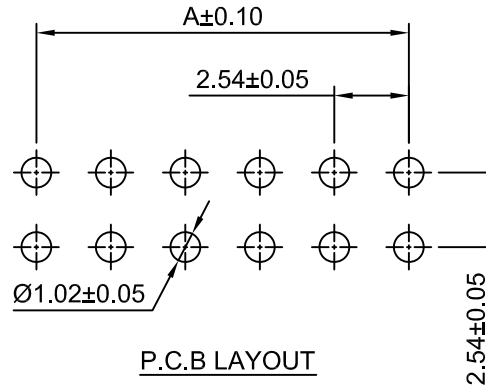


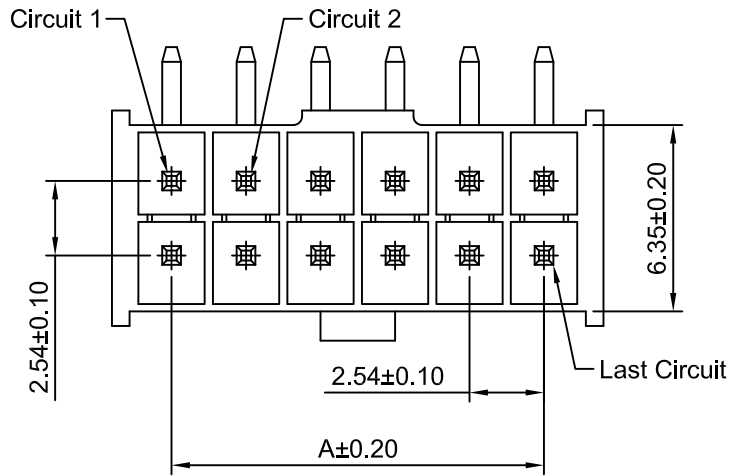

Pin 0.64 SQ

Ordering Information:

A2549WRI-2xXP - ** - *** - ***
1 2 3 4

- Part No.
- Material:
(Blank):LCP,UL94V-0
- Color:
(Blank):Ivory
BK:Black
- Finish:
(Blank):Tin over Nickel
G:1µin(0.025µm)MIN.Select Gold
100µin(2.54µm)MIN.Select Tin
G10:10µin(0.25µm)MIN.Select Gold
100µin(2.54µm)MIN.Select Tin
G15:15µin(0.38µm)MIN.Select Gold
100µin(2.54µm)MIN.Select Tin
G30:30µin(0.76µm)MIN.Select Gold
100µin(2.54µm)MIN.Select Tin

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP,UL94V-0

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.54	6.60	2x14P	33.02	37.08
2x3P	5.08	9.14	2x15P	35.56	39.62
2x4P	7.62	11.68	2x16P	38.10	42.16
2x5P	10.16	14.22	2x17P	40.64	44.70
2x6P	12.70	16.76	2x18P	43.18	47.24
2x7P	15.24	19.30	2x19P	45.72	49.78
2x8P	17.78	21.84	2x20P	48.26	52.32
2x9P	20.32	24.38	2x21P	50.80	54.86
2x10P	22.86	26.92	2x22P	53.34	57.40
2x11P	25.40	29.46	2x23P	55.88	59.94
2x12P	27.94	32.00	2x24P	58.42	62.48
2x13P	30.48	34.54	2x25P	60.96	65.02

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRWN	CHKD	APPR	2.54mm Pitch 90° Wafer	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A2549WRI-2xXP	A3

REV	DESCRIPTION	DATE
A3	CHANGE THE INFORMATION	2021.04.22
A2	CHANGE THE INFORMATION	2019.04.24
A1	CHANGE THE COLOR	2018.11.29
A0	NEW RELEASE	2014.04.25