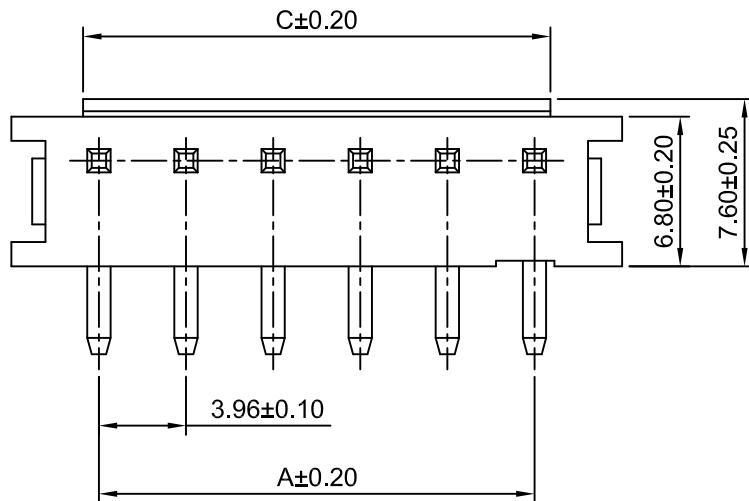


P.C.B LAYOUT

Ordering Information:

A3963WRB-XP - *** - ***
1 2 3

1.Part No.

2.Material:


(blank) - Nylon 66,UL94V-0

GWT - Nylon 66,UL94V-0,GWT 750°C

3.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel



SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.96	11.87	5.40	9P	31.68	39.59	33.12
3P	7.92	15.83	9.36	10P	35.64	43.55	37.08
4P	11.88	19.79	13.32	11P	39.60	47.51	41.04
5P	15.84	23.75	17.28	12P	43.56	51.47	45.00
6P	19.80	27.71	21.24	13P	47.52	55.43	48.96
7P	23.76	31.67	25.20	14P	51.48	59.39	52.92
8P	27.72	35.63	29.16	15P	55.44	63.35	56.88

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1

Draw By:	Approved :
Dlankul Wan	Jack Yln


Title :

3.96mm Pitch


90° Wafer

DRAW NO : A3963WRB-XP

REV
A3

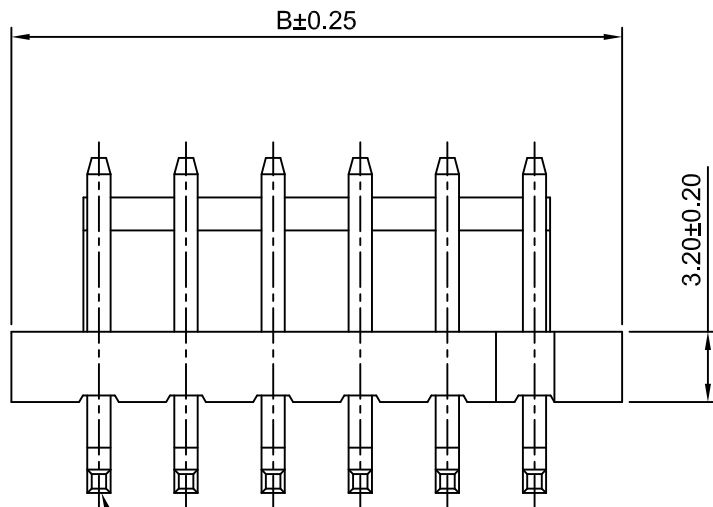

Circuit 1
PIN 1,14 SQ

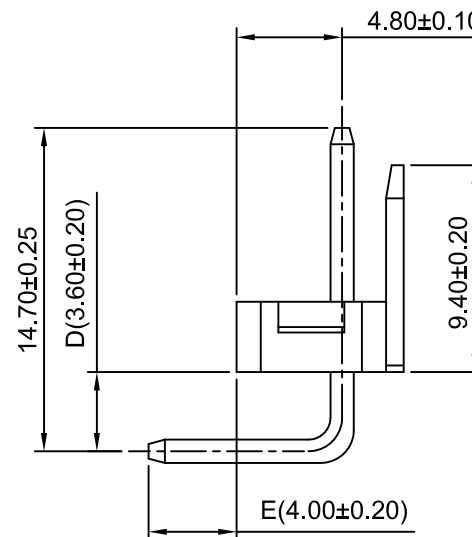

A3	CHANGE THE SIZE D&E	2019.03.23	General Tolerance	
A2	CHANGE THE SIZE	2019.03.04	x.xx±0.25	PROJECT
A1	CHANGE THE DRAWING	2019.01.24	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	