
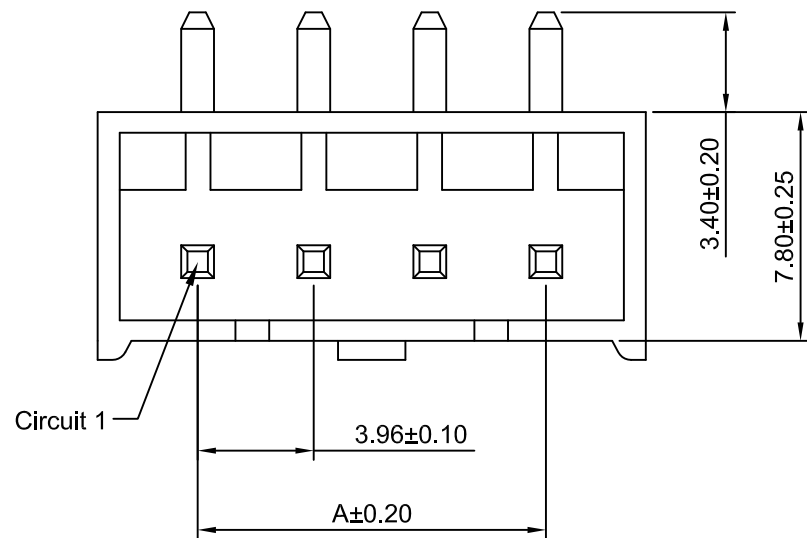


P.C.B LAYOUT


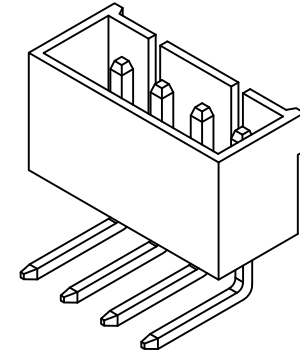


SPECIFICATIONS:

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	11.38	9P	31.68	39.10
3P	7.92	15.34	10P	35.64	43.06
4P	11.88	19.30	11P	39.60	47.02
5P	15.84	23.26	12P	43.56	50.98
6P	19.80	27.22	13P	47.52	54.94
7P	23.76	31.18	14P	51.48	58.90
8P	27.72	35.15	15P	55.44	62.86

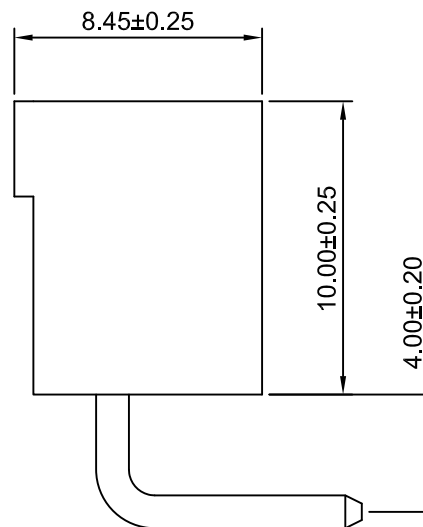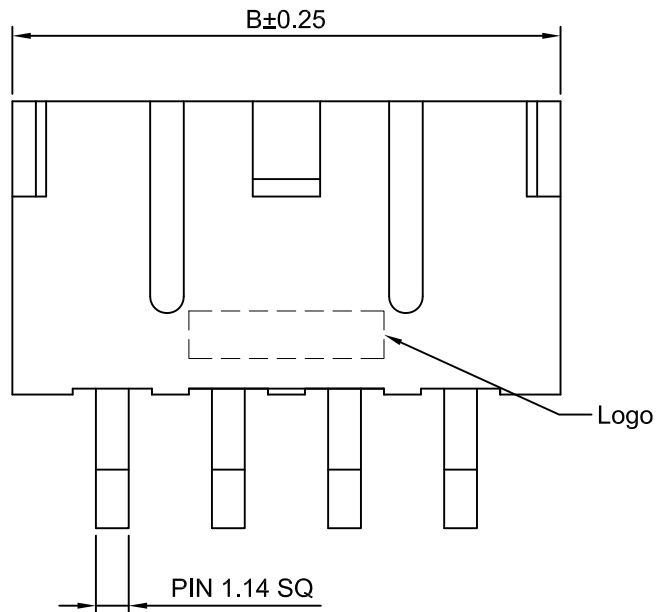

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :
3.96mm PITCH
90° WAFER

REV	DESCRIPTION	DATE
A1	Modify the size	2016.05.01
A0	NEW RELEASE	2014.04.21

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xx±0.15	

DRAW NO : **A3965WR-XP**

REV
A1