
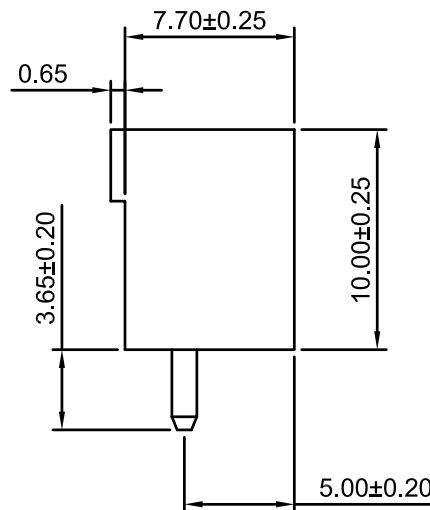
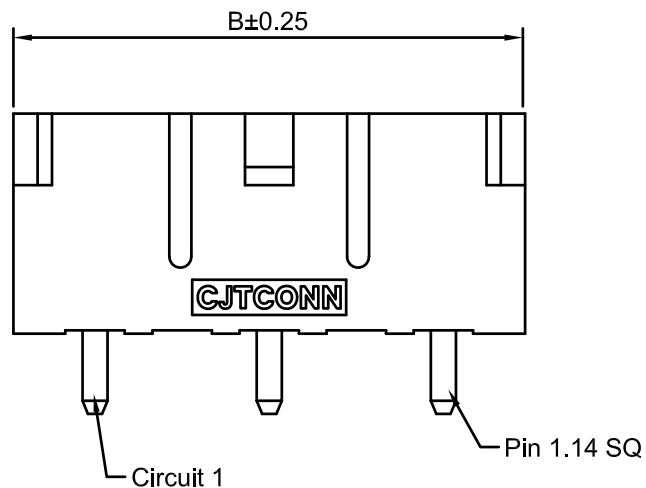
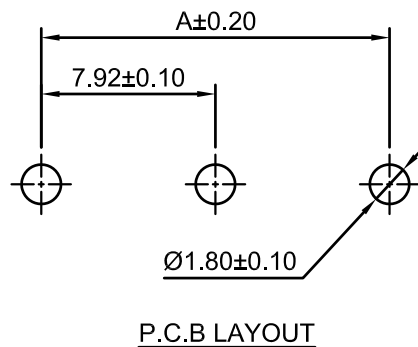


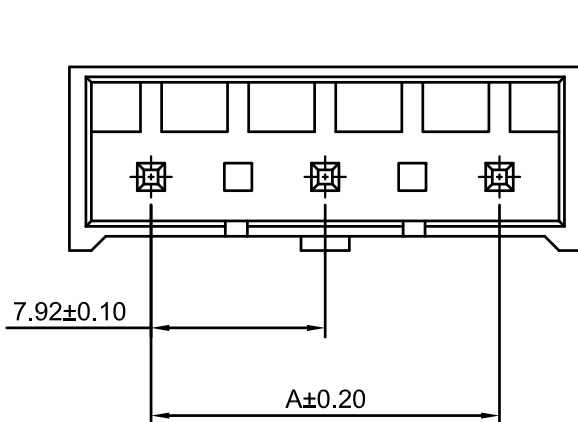

Odering Information:
A3965WV-XP-A - *** - **
1 2 3

1.Part No.

2.Material:

(Blank) :Nylon 66,UL94V-0

GWT : Nylon 66,UL94V-0,,IEC 60335-1,5TH
EDITION GLOW WIRE CAPABLE.

3.Color:

(Blank) : Ivory

BK : Black

RD : Red

YL : Yellow

BL : Blue

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
3P	7.92	15.34	11P	39.60	47.02
5P	15.84	23.26	13P	47.52	54.94
7P	23.76	31.18	15P	55.44	62.86
9P	31.68	39.10			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	3:1	1 of 1	3.96MM PITCH 180° WAFER		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A3965WV-XP-A		A0

A0	NEW RELEASE	2021.02.03
REV	DESCRIPTION	DATE