


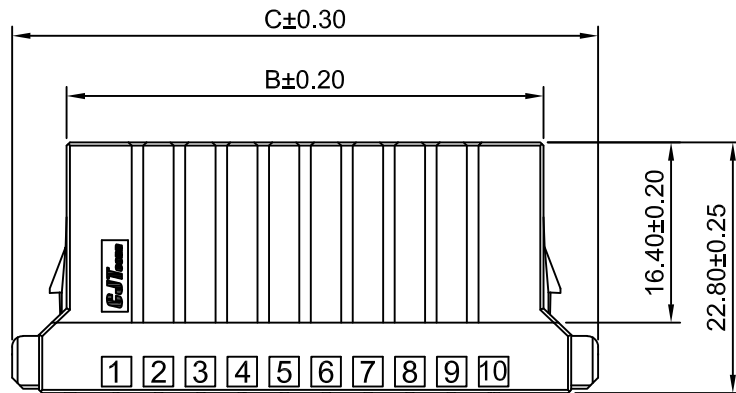

Ordering Information:





C3962HFC-2xXP - ***
1 2

1.Part NO.

2.Color:

(Blank): Black

BL: Blue

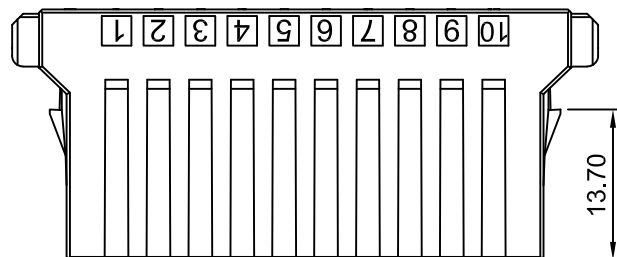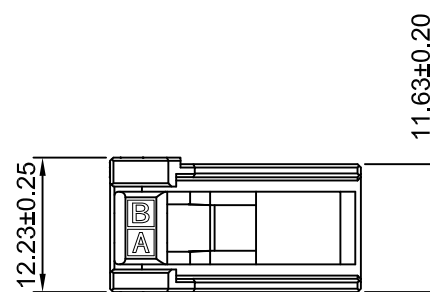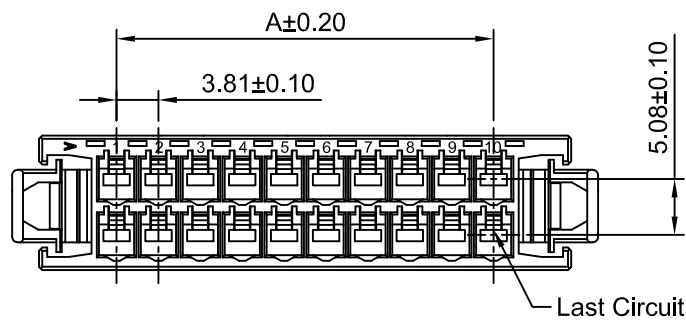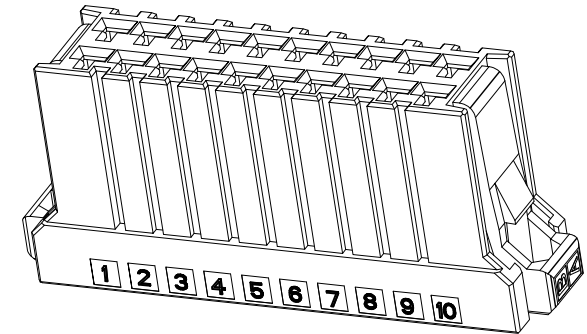

SPECIFICATIONS:

Current Rating: 15A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 5mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: PBT+GF30,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions (mm)		
	A	B	C
C3962HFC-2x3P	7.62	16.70	26.62
C3962HFC-2x4P	11.43	20.51	30.43
C3962HFC-2x5P	15.24	24.32	34.24
C3962HFC-2x6P	19.05	28.13	38.05
C3962HFC-2x8P	26.67	35.75	45.67
C3962HFC-2x10P	34.29	43.37	53.29

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	1.5:1	1 of 1	3.81mm PITCH HOUSING
DRWN	CHK'D	APPR	
Wenmin Luo	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			DRAWING NO. C3962HFC-2xXP
			REV A0