
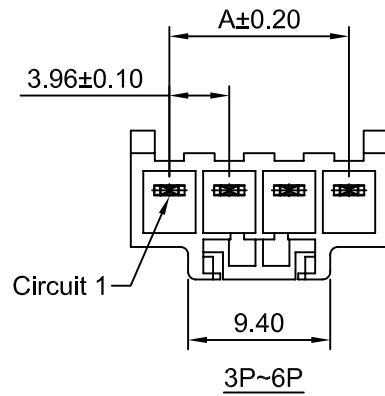
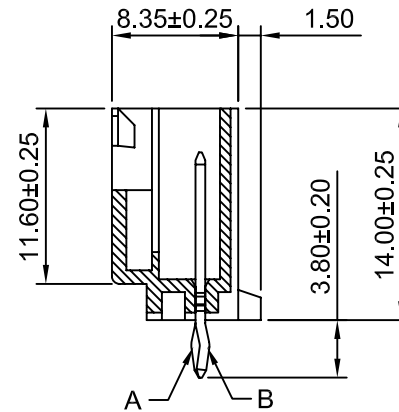


Ordering Information:
C3962WV-XP-2 - *** - **
1 2 3

- 1.Part No.
- 2.Material:
(blank):Nylon 66,UL94V-0
GWT:Nylon 66,UL94V-0,GWT 750°C
- 3.Color:
(blank):Natural
BK:Black
RD:Red
BL:Blue
YL:Yellow

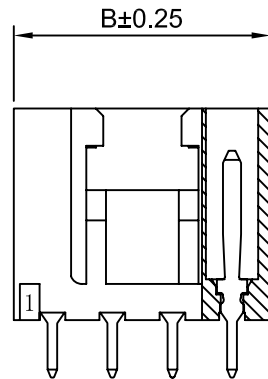

SPECIFICATIONS:
Current Rating: 6A AC,DC
Voltage Rating: 300V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material:Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	3.96	9.06	5P	15.84	20.94
3P	7.92	13.02	6P	19.80	24.90
4P	11.88	16.98			

King To Be Applied As Follows

Circuits NO.	1	2	3	4	5	6
A3962WV-2P-2	A	B				
A3962WV-3P-2	A	B	A			
A3962WV-4P-2	A	B	A	B		
A3962WV-5P-2	A	B	A	B	A	
A3962WV-5P-2-A	A	X	B	X	A	
A3962WV-5P-2-N2	A	X	B	B	A	
A3962WV-6P-2	A	B	A	B	A	B

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :		3.96mm PITCH	
		180° Wafer	
DRAW NO :		C3962WV-XP-2	REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2017.04.10

General Tolerance	ANGLE±
x.xx±0.25 x.xx±0.20 x.xxx±0.15	