


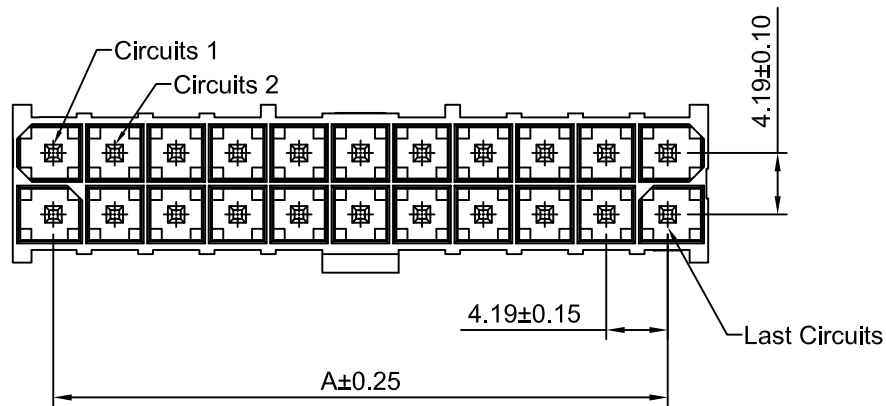


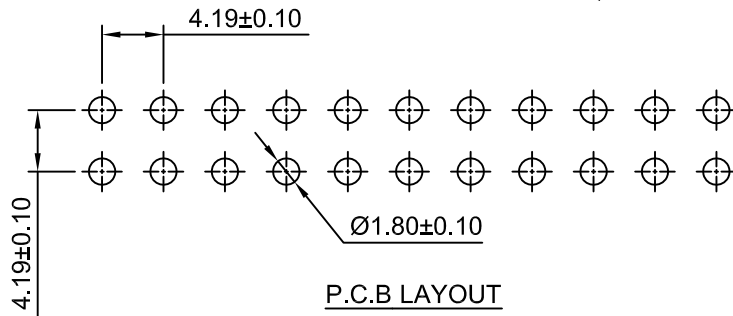


2x3P~2x15P
ODD POSITIONS

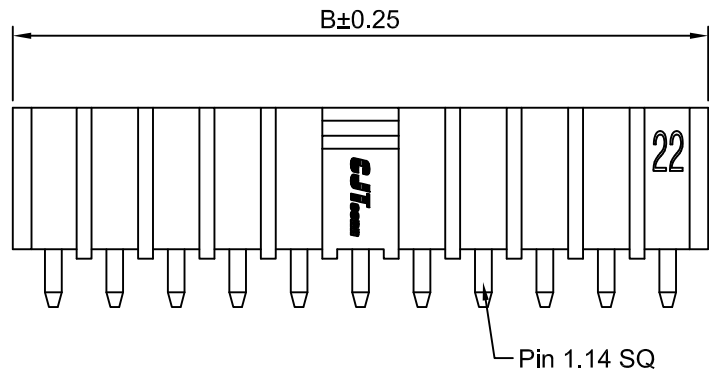

P.C.B LAYOUT

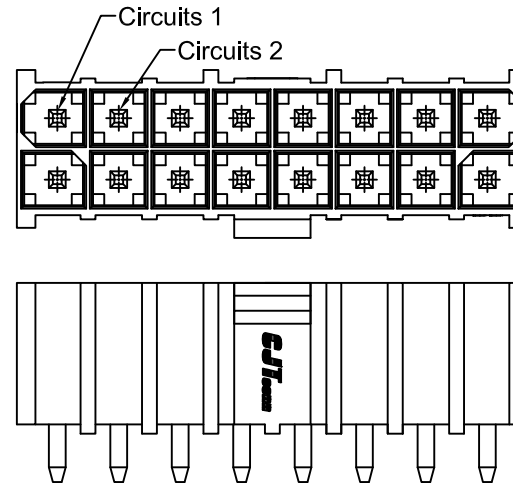

2x2P~2x14P
EVEN POSITIONS

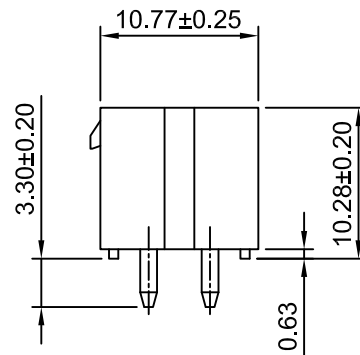

Ordering Information:

C4201WVSB-2xXP - *** - *** - ***
1 2 3 4

- Part No.
- Material:
(blank): LCP,UL94V-0
GWT: LCP,UL94V-0,GWT 750°C(Black)
- Color:
(blank): Black
IV: Ivory
- Finish:
(blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -55°C ~ +105°C
Contact Resistance: 10mΩ Max
After environmental testing: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material:Brass
Material: LCP,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C4201WVSB-2x2P	4.19	9.72
C4201WVSB-2x3P	8.38	13.91
C4201WVSB-2x4P	12.57	18.10
C4201WVSB-2x5P	16.76	22.29
C4201WVSB-2x6P	20.95	26.48
C4201WVSB-2x7P	25.14	30.67
C4201WVSB-2x8P	29.33	34.86
C4201WVSB-2x9P	33.52	39.05
C4201WVSB-2x10P	37.71	43.24
C4201WVSB-2x11P	41.90	47.43
C4201WVSB-2x12P	46.09	51.62
C4201WVSB-2x13P	50.28	55.81
C4201WVSB-2x14P	54.47	60.00
C4201WVSB-2x15P	58.66	64.19

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A4	CHANGE THE DRAWING	2023.07.12
A3	CHANGE THE DRAWING	2021.01.06
A2	CHANGE THE DRAWING	2020.09.08
A1	CHANGE THE DRAWING	2019.11.30
A0	NEW RELEASE	2015.03.11
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	2:1	1 of 1
DRWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25		
x.xx±0.20		
x.xxx±0.15		
ANGLES ±1°		

TITLE		
4.19mm PITCH		
DUAL ROW WAFER		
DRAWING NO.		REV
C4201WVSB-2xXP		A4