


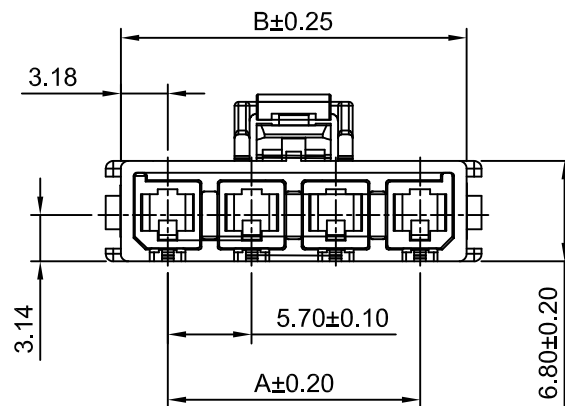

Ordering Information:

C6201HFB-XP - ***
1 2

1.Part NO.

2.Logo & Marking:

(Blank): With Mark

NK: Without Mark

SPECIFICATIONS:

Current Rating:26A AC,DC (MAX)

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +120°C

Contact Resistance: 7mΩMax.



Insulation Resistance: 1000MΩMin.

Withstanding Voltage: 2000V AC/minute


Material:Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions


Part NO.	Dimensions(mm)	
	A	B
C6201HFB-2P	5.70	12.05
C6201HFB-3P	11.40	17.75
C6201HFB-4P	17.10	23.45
C6201HFB-5P	22.80	29.15
C6201HFB-6P	28.50	34.85
C6201HFB-7P	34.20	40.55
C6201HFB-8P	39.90	46.25
C6201HFB-9P	45.60	51.95
C6201HFB-10P	51.30	57.65
C6201HFB-11P	57.00	63.35
C6201HFB-12P	62.70	69.05

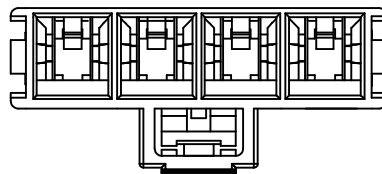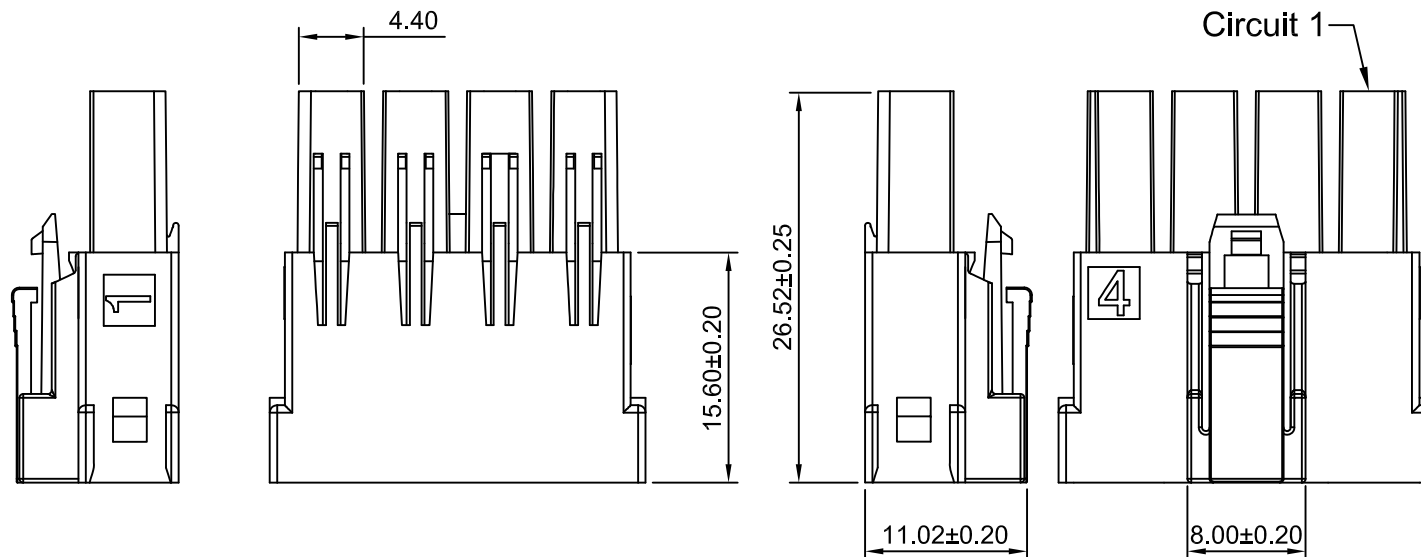


CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	2:1	1 of 2	5.70mm PITCH HOUSING		
DRWN	CHK'D	APPR			
Wenmin Luo	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION			
x.xx±0.25					
x.xxx±0.20					
x.xxxx±0.15					
ANGLES ±1°					
DRAWING NO.			REV		
C6201HFB-XP			A1		




2P




3P




4P

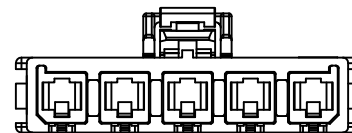


5P

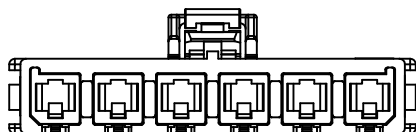


6P

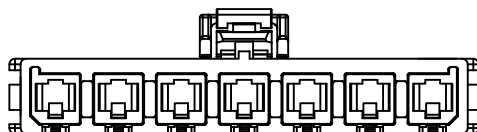


7P

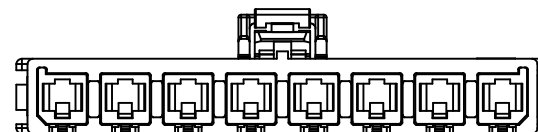


8P

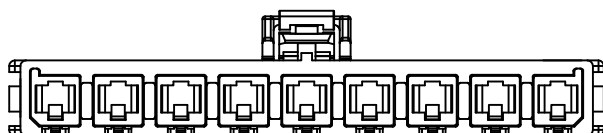


9P

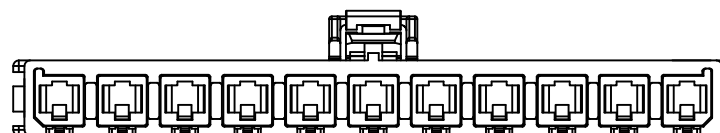

11P

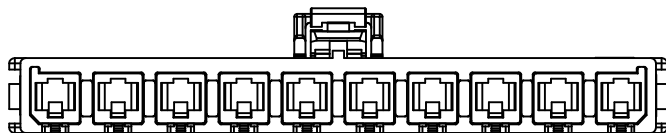

10P

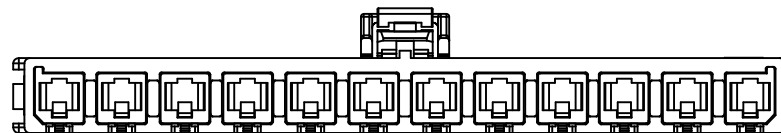

12P

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 5.70mm PITCH HOUSING	
mm	1.5:1	2 of 2		
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C6201HFB-XP	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			REV A1	

A1	CHANGE THE DRAWING	2022.03.31
A0	NEW RELEASE	2021.08.26
REV	DESCRIPTION	DATE