

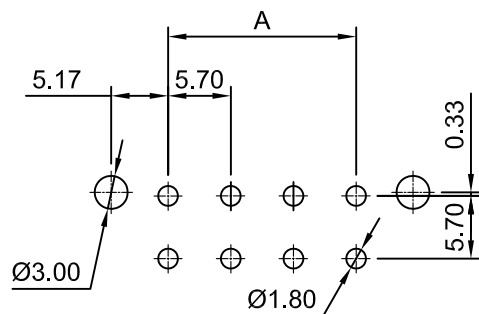
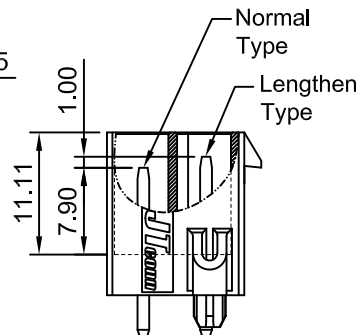
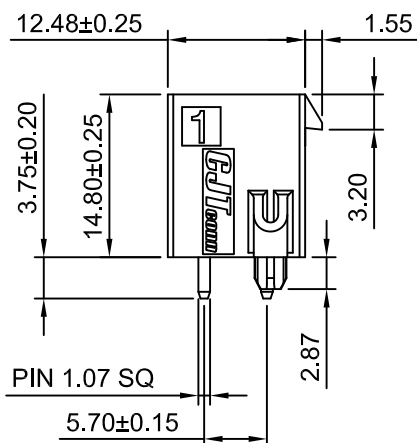
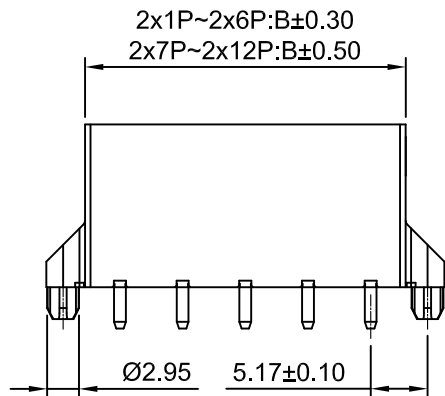
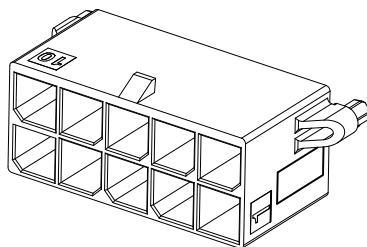


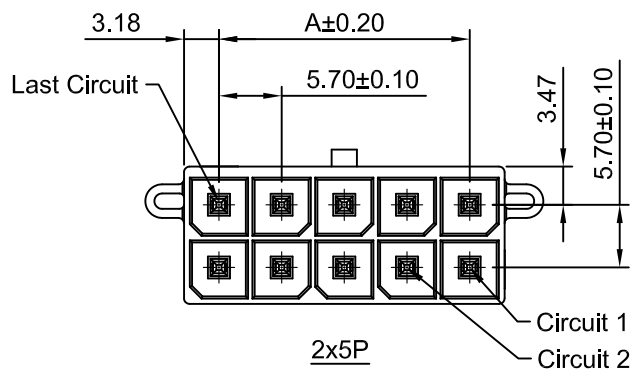

2x2P~2x12P



2x1P

P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:
C6201WVB-F-2xXP - ** - *** - *** - *** - **
1 2 3 4 5 6

- Part NO.
- Pin Material:
(Blank): High conductivity copper
B: Brass
- Finish:
(Blank): Tin over Nickel
G: Gold Flash over Nickel(Au:1u")
G3: Gold over Nickel(Au:3u")
G15: Gold over Nickel(Au:15u", Mating Area)
G30: Gold over Nickel(Au:30u", Mating Area)
- Void position:(see sheet 3)
(Blank): Full position
N*: Void position(Arbitrarily numbers)
- Length of Pin:(see sheet 3)
(Blank): Normal Type
L*: Lengthen Type(Arbitrarily numbers)
- Packing:
(Blank): Tray
RE: Tape & Reel

SPECIFICATIONS:

Current Rating:23A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -40°C ~ +120°C
Contact Resistance: 7mΩMax.
Insulation Resistance: 1000MΩMin.
Withstanding Voltage: 2000V AC/minute
Pin Material: High conductivity copper
Material:LCP,UL94V-0(Black)Halogen Free IEC 60335-1,5th
Edition Glow Wire Capable.

Ordering Information & Dimensions

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
C6201WVB-F-2x1P	--	8.35	C6201WVB-F-2x7P	34.20	40.55
C6201WVB-F-2x2P	5.70	12.05	C6201WVB-F-2x8P	39.90	46.25
C6201WVB-F-2x3P	11.40	17.75	C6201WVB-F-2x9P	45.60	51.95
C6201WVB-F-2x4P	17.10	23.45	C6201WVB-F-2x10P	51.30	57.65
C6201WVB-F-2x5P	22.80	29.15	C6201WVB-F-2x11P	57.00	63.35
C6201WVB-F-2x6P	28.50	34.85	C6201WVB-F-2x12P	62.70	69.05


CJTconn

CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet	TITLE
mm	1:1	1 of 3	
DRAWN	CHKD	APPR	5.70mm Pitch Vertical Dual Row Wafer
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C6201WVB-F-2xXP
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2022.11.14
A2	CHANGE THE DRAWING	2022.05.23
A1	CHANGE THE DRAWING	2022.03.31
A0	NEW RELEASE	2020.12.20


REV
A3




2X1P




2X3P

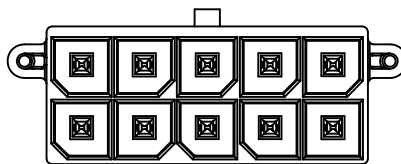


2X5P

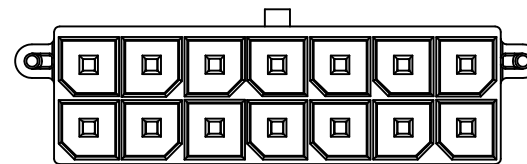


2X7P




2X2P




2X4P

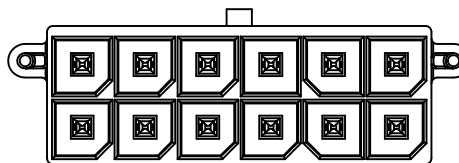


2X6P

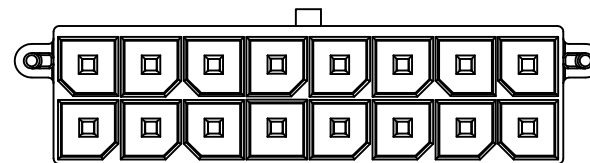


2X8P

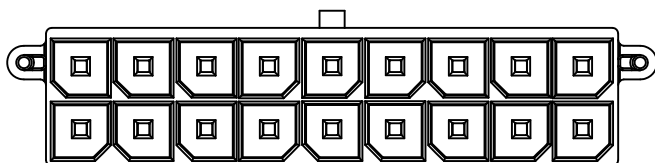


2X9P

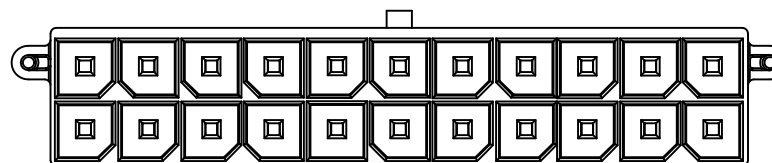

2X11P

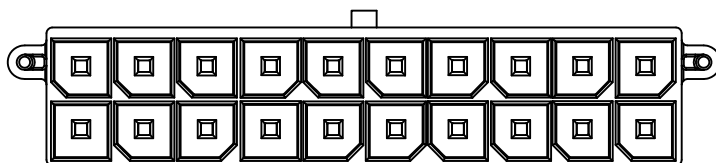

2X10P

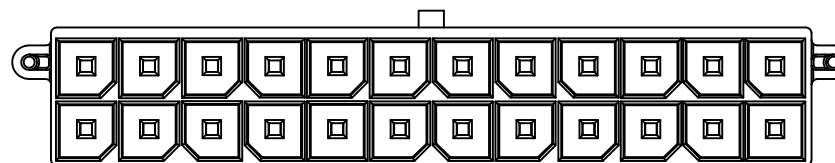

2X12P

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE	
mm	1.5:1	2 of 3		
DRAWN	CHKD	APPR	5.70mm Pitch Vertical Dual Row Wafer	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. C6201WVB-F-2xXP	REV A3
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A3	CHANGE THE DRAWING	2022.11.14
A2	CHANGE THE DRAWING	2022.05.23
A1	CHANGE THE DRAWING	2022.03.31
A0	NEW RELEASE	2020.12.20
REV	DESCRIPTION	DATE

Style	Circuits	O=With circuit (post) X=Without circuit (post)																							
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24
N1.5.7.9	2x5P	X	O	O	O	X	O	X	O	X	O														
N1.3.5.8.10.12	2x6P	X	O	X	O	X	O	O	X	O	X	O	X												
Style	Circuits	O=Normal Type (post) X=Lengthen Type (post)																							
		P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24
L1	2x1P	X	O																						
L4	2x2P	O	O	O	X																				
L1	2x2P	X	O	O	O																				
L1.2.3	2x3P	X	X	X	O	O	O																		
L1.3	2x3P	X	O	X	O	O	O																		
L1.2.3.4	2x4P	X	X	X	X	O	O	O	O																
L1.10	2x5P	X	O	O	O	O	O	O	O	O	X														
L3.4.5.9.10	2x6P	O	O	X	X	X	O	O	O	X	X	O	O												

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE 5.70mm Pitch Vertical Dual Row Wafer		
mm	2:1	3 of 3			
DRAWN	CHK'D	APPR			
Haisen Li	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO. C6201WVB-F-2xXP	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°					
				REV	A3

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2022.11.14
A2	CHANGE THE DRAWING	2022.05.23
A1	CHANGE THE DRAWING	2022.03.31
A0	NEW RELEASE	2020.12.20