

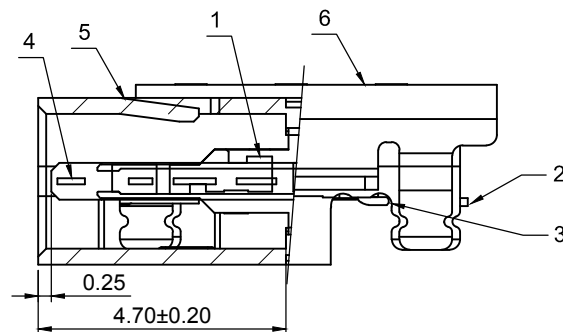
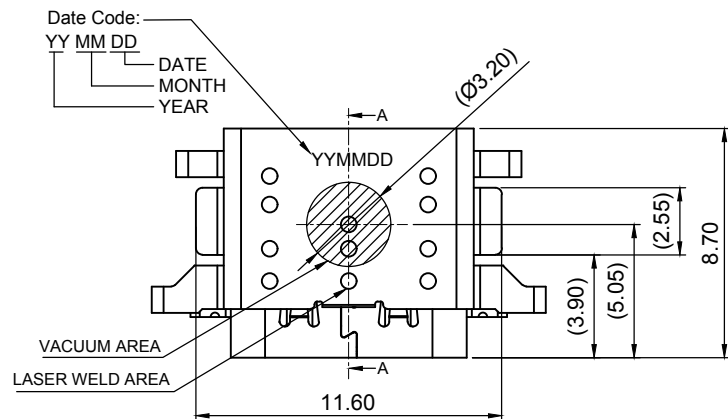
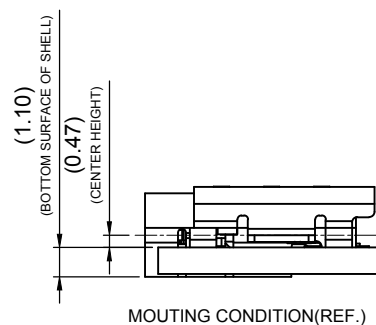
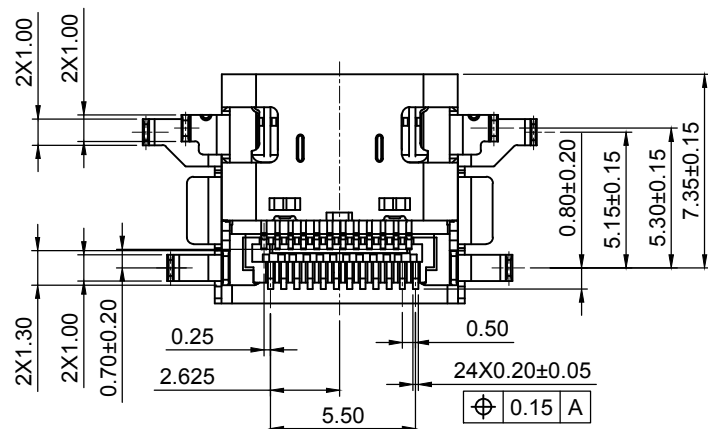

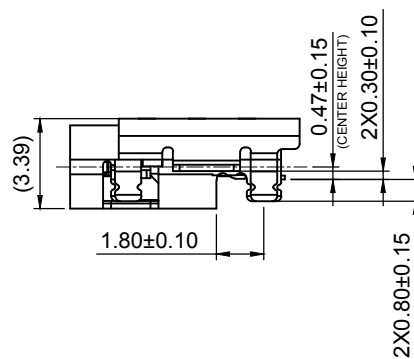


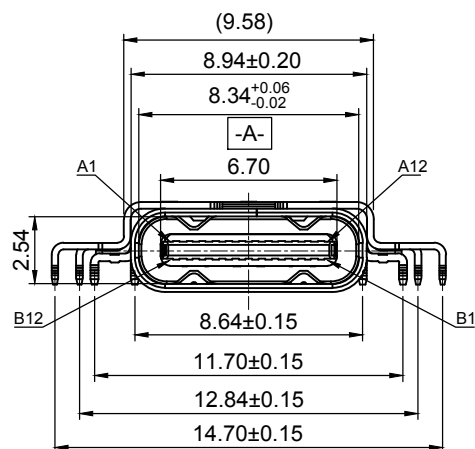

SECTION A-A(剖视图A-A)
SCALE 2:1 (比例 2:1)

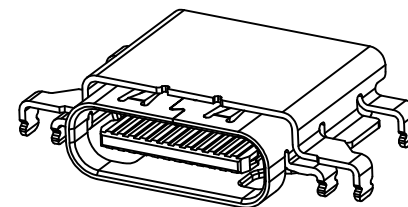


TYPE:



6	OUT SHELL	SUS304 T=0.25mm	Nickel 30u" Min Plating	1PCS
5	INT SHELL	SUS304 T=0.30mm	Nickel 30u" Min Plating	1PCS
4	Shielding Plate	SUS301 T=0.15mm	Nickel 30u" Min Plating	1PCS
3	Down Contact	C18400 T=0.12mm	Au 3u"Plated On Vcontact Area	2SET
2	Top Contact		GF Plated On Solder Area; Nickel 30u"Min Under Plating Over All.	
1	Housing	PA9T UL94V-0	Black	1PCS
No.	Description	Material	Remarks	QTY

CJTconn CHANGJIANG CONNECTORS CO.,LTD.


Unit	Scale	Sheet	TITLE	
mm	1:1	1 of 3	USB4 Type C Female 24Pin MID-MOUNT, OFFSET HEIGHT 0.23mm, DUAL-ROW SMT, CH=1.32mm, L=8.21, SOLDER TAB=0.7mm	
DRAWN	CHKD	APPR	DRAWING NO.	
Haisen Li	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	CJ-CF324-015-24P	
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
A0	NEW RELEASE	2020.12.15	REV A0	
REV	DESCRIPTION	DATE		

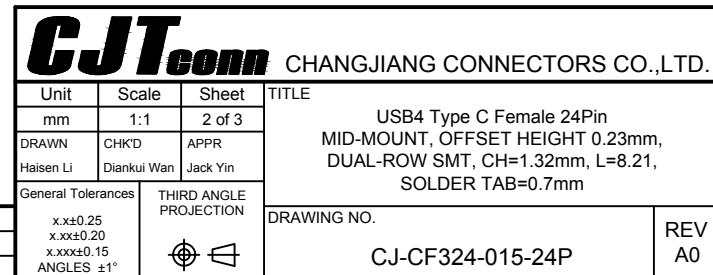

20PCS EMPTY 1450PCS PRODUCTS BEGINING PORTION 400mm MIN 20PCS EMPTY

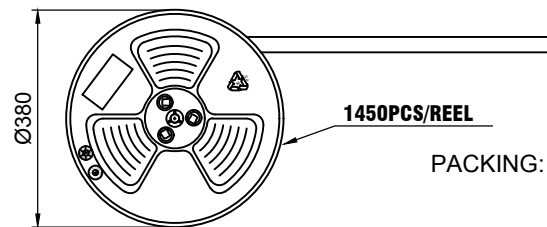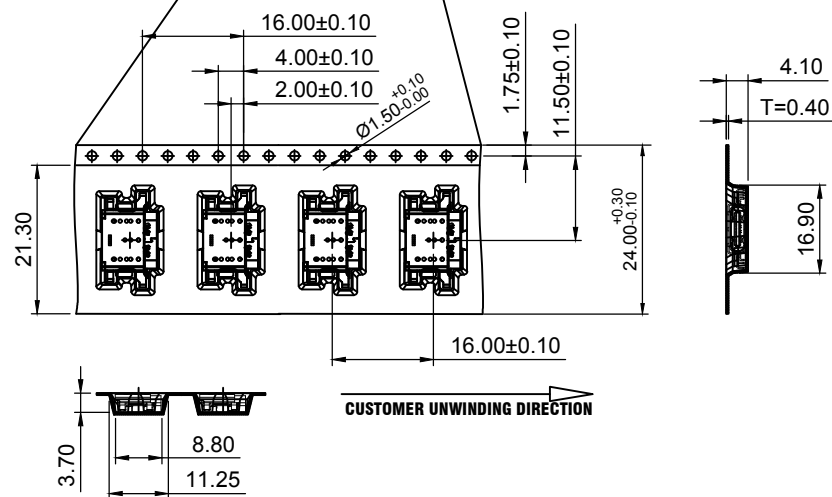

PACK DIRECTION

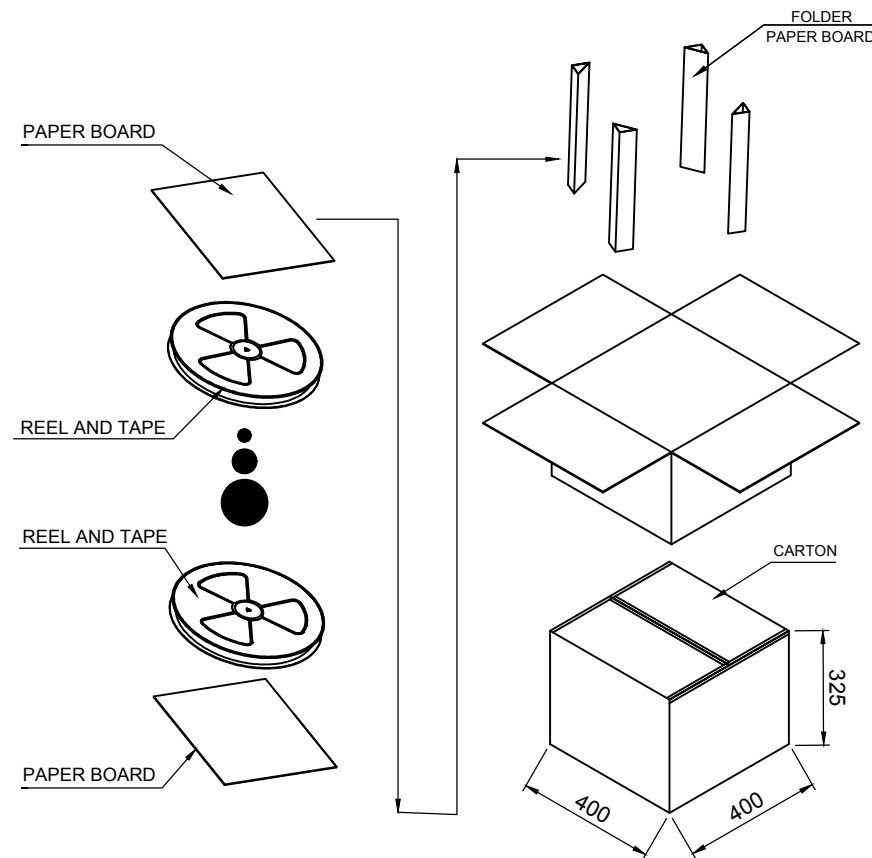

	REEL	CARTON
CONNECTOR (PCS)	1450	14500

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE
mm	1:1	3 of 3	USB4 Type C Female 24Pin MID-MOUNT, OFFSET HEIGHT 0.23mm, DUAL-ROW SMT, CH=1.32mm, L=8.21, SOLDER TAB=0.7mm
DRAWN	CHKD	APPR	
Haisen Li	Diankui Wan	Jack Yin	
General Tolerances			THIRD ANGLE PROJECTION
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			
DRAWING NO.			REV
CJ-CF324-015-24P			A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2020.12.15